

Note: Drain position central unless dimensioned otherwise Step Entry SKU: LQ-GEN-LH-ST Level Entry SKU: LQ-GEN-LH-LE 1,360 o/a 1,310 o/a 1,295 1,269 1,269 1,6 See Waste Channel **Recess Specifications** Upstand Upstand Countersunk for size 434.5 to 2 sides to 2 sides 877 To centre line of glazing Screw Holes 877 To centre line of glazing 910 o/a Fall 960 o/a Fall Floor Recess 1330x930x33 **Glazing Channel Glazing Channel** [∆]10_ 1,277 10 1,277 To centre line of glazing To centre line of glazing **Drain Section Edge Section Drain Section** Edge Section 1:80 Slope 1:80 Slope Floor Level Floor Level 8mm Toughened Safety Glass Screen 8₁8±2 Factory Fitted 8mm Toughened Safety Glazing Channel 110|10 Glass Screens 10|10 Upstand Upstand Waterproofing on side wall on side wall Flange Factory fitted Countersunk Glazing Channel Screw Holes 85 _F<u>loor</u> Level Shower Floor Shower Floor Recess Floor Level Recess Depth 20 16 40 □ 31 See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth information under floor information under floor Note: Verify exact shower base dimensions on site

Screen Options:







For more product information go to:


www.atlantis.co.nz/shop/linea-quattro/geneva-1300x900/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



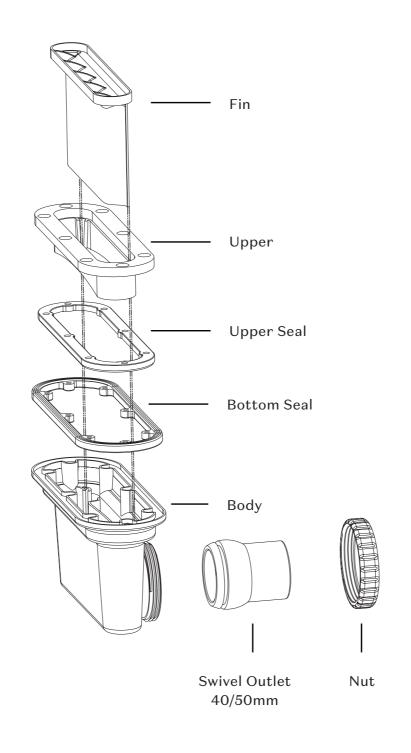

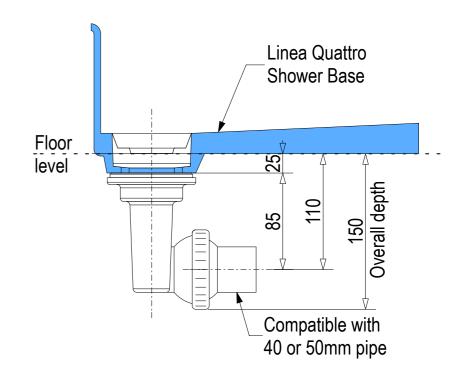

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



