
Note: Drain position central unless dimensioned otherwise Level Entry SKU: LQ-SOF-B-LH-LE Step Entry SKU: LQ-SOF-B-LH-ST 1,560 o/a 1,510 o/a 1,495 16 734.5 734.5 734.5 734.5 See Waste Channel 877 To centre line of glazing 877 To centre line of glazing **Recess Specifications** for size Upstand Upstand Countersunk 995 869 869 to 2 sides to 2 sides Screw Holes Fa 960 Floor Recess 1530x930x27 Glazing Channel Glazing Channel 1,477 1,477 To centre line of glazing To centre line of glazing **Drain Section Edge Section Drain Section** Edge Section 1:80 Slope 1:80 Slope Floor 8mm Toughened Safety Glass Screen 8 18±2 Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens 10|10 110 10 Waterproofing Upstand Upstand Flange on side wall on side wall Factory fitted Countersunk Glazing Channel Screw Holes \_Floor Level Shower Floor Shower Floor Floor Level Recess Level Recess 16 40 31 ⊳ Depth See Waste Channel Recess See Waste Channel Recess


Note: Verify exact shower base dimensions on site

Screen Options:



Specifications for depth

information under floor



For more product information go to:

Specifications for depth

information under floor


www.atlantis.co.nz/shop/linea-quattro/sofia-1500x900/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

## AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



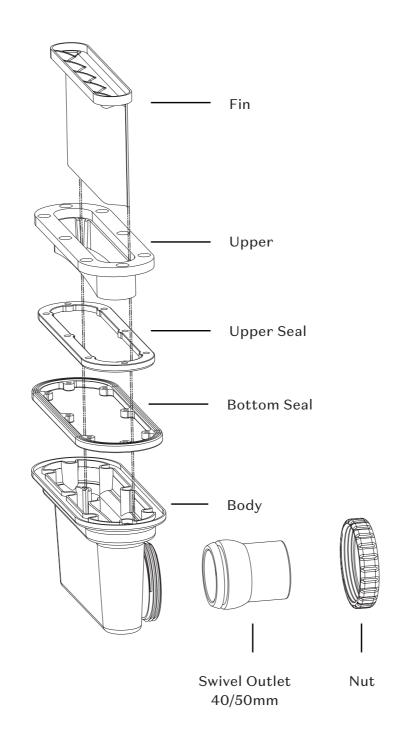

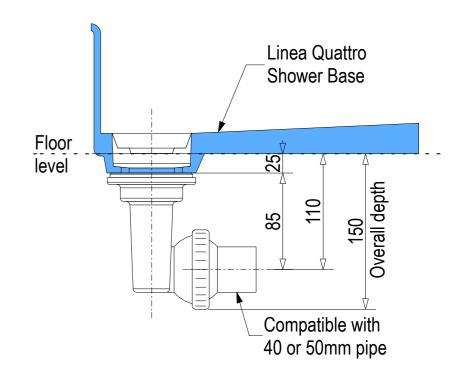

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



