

CPS & CPR – Perforated Diffusers

Models: CPS & CPR

The Holyoake Series CPS and CPR perforated supply and return diffusers are designed for heating, cooling and ventilating, ceiling applications.

The Series CPS comprises of a perforated face plate mounted in a removable core frame, which blends suitably into many ceiling types. Concealed, adjustable pattern controllers on the rear, provide efficient airflow distribution and can be easily adjusted, by simply removing the fascia, unlocking and repositioning. Then any desired distribution pattern can be obtained, without any change in airflow, or noise levels. This simplifies ordering procedures and eliminates the need to re-balance the system. Series CPR are identical, without patterns. Minimal ceiling plenum height is required, (dependant on connecting spigot style); which is available with a varied choice of round, or square inlet sizes, see table below.

Construction

Extruded aluminium frames. Aluminium perforated face and galvanised adaptor pan.

Installation

The CPS plenum adaptor is independently supported, built in to the ceiling and then connected and sealed to the ductwork. The Removable core system allows the preset pattern controllers to be suitably positioned and then the perforated face is simply pushed into the installed frame and clipped into place.

Features

- Aesthetically pleasing design.
- Fully adjustable concealed pattern controllers.
- Infinite range of distribution patterns.
- Compact assembly height and Removable Core frame.
- Plaster ceiling and 'T' Rail installation options.
- Circular, or square inlets in a range of sizes.

A Nominal Diffuser Size	250 x 250	350 x 350	450 x 450	550 x 550	250 x 550	550 x 850	250 x 850	250 x 1150	550 x 1150
C* Overall Plenum Adaptor Size	300 x 300	400 x 400	500 x 500	600 x 600	300 x 600	600 x 900	300 x 900	300 x 1200	600 x 1200
Nominal Neck Size D*	150 x 150								
	200 x 200								
	250 x 250								
	300 x 300								
	150 x 450								
Nominal Neck Diameter E*	125 DIA								
	150 DIA								
	175 DIA								
	200 DIA								
	250 DIA								
CPS & CPR with Adaptor	300 DIA								
	350 DIA								
	400 DIA								


Ceiling Module and Duct Sizes*

● Indicates available combination

Note

1. For other frame styles and module sizes and for the performance of sizes not shown in the capacity tables, contact your local Holyoake branch.
2. Seismic restraints are required, but not supplied.

CPS Supply and CPR Return

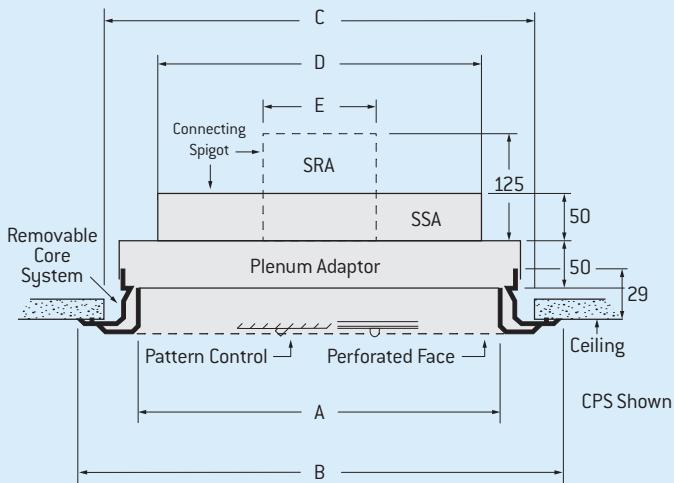

SSA [Square to Square Adaptor] *

SRA [Square to Round Adaptor] *

* Refer to Accessories Section K.

A = Nominal Diffuser Size.

B = Overall Frame Size (A + 80mm).

C = Overall Plenum Adaptor Size
(Ceiling Opening).

D = Square Adaptor Neck Size.

E = Round Adaptor Neck Size.

Options

Heavy gauge galvanised perforated face, available against special order.
OBD-2 – Opposed blade damper.






Finish

Standard Finish is Holyoake White, or can be powder coated to specific requirements.

Air Pattern Controller Adjustment Notes

1. Extract the Removeable Core from the CPS diffuser.
2. The pattern controls are mounted on the rear of the Removeable Core and are now visible. Loosen stud tubing and rotate the air pattern controller to the desired flow direction. Tighten the stud tubing on the controller.
3. Replace the Removeable Core assembly.

Versatile Air Distribution for most Applications

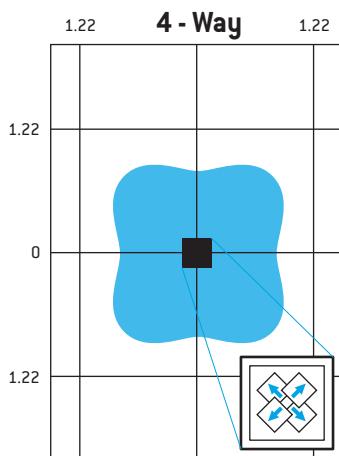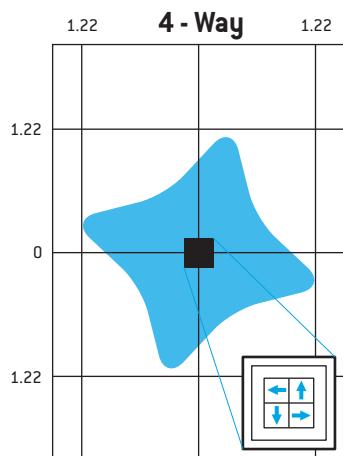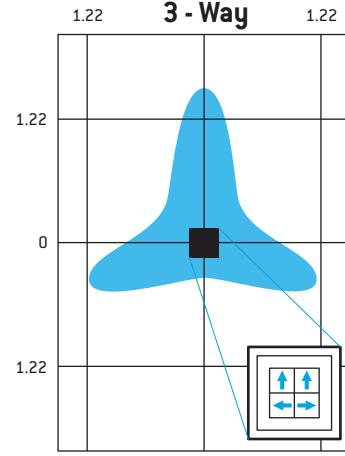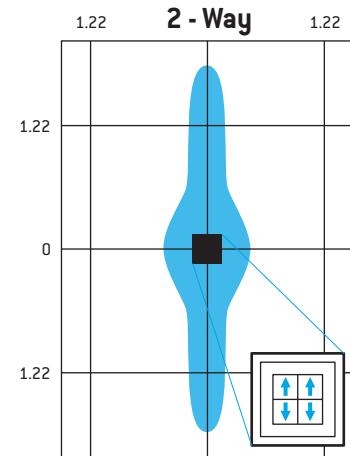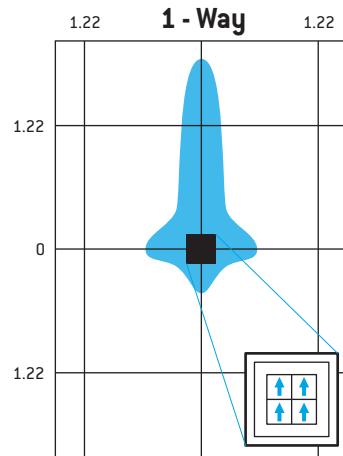

Throw values for above pattern will be 0.6 times the values shown in the performance tables.

Performance Notes

1. Refer to Performance Data Tables on the following pages.
2. CPR – Return Data is shown in Dark Blue shaded area at the bottom of each table.
3. Throw values are given for terminal velocities of 0.75 and 0.25 m/s.

CPS & CPR – Performance Data

300 x 300 Module Size

Duct Size	Neck Velocity, m/s Vel. Press., Pa	1.53 2	2.04 3	2.55 4	3.06 6	3.57 8	4.08 10	5.1 16	6.12 23	7.14 31
	Tot. Press., Pa Flow Rate, m³/s NC	3 0.019	5 0.026	8 0.033	11 0.038	15 0.045	19 0.052	30 0.064	43 0.078	59 0.090
125 mm RD	Throw, m	4-WAY 0.3-1.2	0.6-1.5	0.6-1.8	0.6-2.1	0.9-2.1	0.9-2.4	1.5-2.7	1.8-3.1	1.8-3.1
		3-WAY 0.3-1.2	0.6-1.8	0.6-2.1	0.6-2.4	0.9-2.7	1.2-3.1	1.5-3.1	1.8-3.7	1.8-4.0
		2-WAY 0.3-1.5	0.6-1.8	0.6-2.4	0.9-3.1	1.2-3.1	1.2-3.7	1.8-4.0	2.1-4.3	2.1-4.6
		1-WAY 0.6-1.8	0.6-2.4	0.9-2.7	1.2-3.1	1.5-3.4	1.8-4.0	1.8-4.0	2.4-4.3	2.7-4.6
150 mm RD	Throw, m	Tot. Press., Pa Flow Rate, m³/s NC	4 0.028	7 0.038	10 0.047	15 0.057	20 0.066	25 0.076	40 0.092	57 0.111
		4-WAY 0.3-1.2	0.6-1.5	0.9-2.1	0.9-2.4	0.9-2.4	0.9-2.7	1.5-3.1	1.8-3.1	2.1-3.4
		3-WAY 0.3-1.2	0.6-1.8	0.9-2.4	0.9-2.7	0.9-3.1	1.2-3.1	1.5-3.4	1.8-4.0	2.1-4.3
		2-WAY 0.3-1.5	0.6-2.1	0.9-2.7	0.9-3.1	1.2-3.4	1.2-3.7	1.8-4.3	2.1-4.6	2.4-5.2
		1-WAY 0.6-1.8	0.9-2.7	0.9-3.4	1.2-3.4	1.5-3.7	1.8-4.0	2.1-4.6	2.7-4.9	3.1-5.2
175 mm RD	Throw, m	Tot. Press., Pa Flow Rate, m³/s NC	6 0.038	10 0.050	15 0.064	21 0.076	29 0.090	37 0.102	58 0.127	83 0.151
		4-WAY 0.3-1.5	0.6-1.8	0.9-2.7	0.9-3.1	1.2-3.1	1.2-3.4	1.8-3.7	2.4-4.0	2.7-4.3
		3-WAY 0.3-1.5	0.6-2.1	0.9-3.1	0.9-3.4	1.2-3.7	1.5-4.0	1.8-4.3	2.1-4.9	2.7-5.2
		2-WAY 0.3-1.8	0.6-2.7	0.9-3.4	1.2-3.7	1.5-4.3	1.5-4.6	2.1-5.2	2.7-5.5	3.1-6.1
		1-WAY 0.6-2.4	0.9-3.4	1.2-3.7	1.5-3.4	1.8-4.3	2.4-4.6	2.7-5.2	3.4-5.5	3.7-6.1
150 x 150	Throw, m	Tot. Press., Pa Flow Rate, m³/s NC	5 0.035	8 0.047	13 0.059	19 0.071	25 0.083	33 0.094	50 0.118	73 0.142
		4-WAY 0.3-1.5	0.6-1.8	0.9-2.4	0.9-2.7	1.2-2.7	1.2-3.1	1.8-3.7	2.1-3.7	2.4-4.0
		3-WAY 0.3-1.5	0.6-2.1	0.9-2.7	0.9-3.1	1.2-3.4	1.5-3.7	1.8-4.3	2.1-4.6	2.4-4.9
		2-WAY 0.3-1.8	0.6-2.4	0.9-3.1	1.2-3.7	1.5-4.0	1.5-4.3	2.1-5.2	2.4-5.2	2.7-5.8
		1-WAY 0.6-2.1	0.9-3.1	1.2-3.4	1.5-3.7	1.8-4.0	2.1-4.3	2.7-5.2	3.1-5.2	3.4-5.8
* 250 x 250	Neg Stat. Press., Pa Flow Rate, m³/s NC	8 0.099	13 0.132	19 0.163	28 0.198	39 0.229	50 0.262	78 0.328	113 0.392	154 0.458

* performance data for CPR.

300 x 600 Module Size

Duct Size	Neck Velocity, m/s Vel. Press., Pa	1.53 2	2.04 3	2.55 4	3.06 6	3.57 8	4.08 10	5.1 16	6.12 23	7.14 31
	Tot. Press., Pa Flow Rate, m³/s NC	3 0.019	5 0.0226	7 0.033	10 0.038	14 0.045	18 0.052	27 0.064	39 0.078	54 0.090
125 mm RD	Throw, m	4-WAY 0.3-1.2	0.6-1.5	0.6-1.8	0.6-2.1	0.9-2.1	0.9-2.4	1.5-2.7	1.8-3.1	1.8-3.1
		3-WAY 0.3-1.2	0.6-1.8	0.6-2.1	0.6-2.4	0.9-2.7	1.2-3.1	1.5-3.1	1.8-3.7	1.8-4.0
		2-WAY 0.3-1.5	0.6-1.8	0.6-2.4	0.9-3.1	1.2-3.1	1.2-3.7	1.8-4.0	2.1-4.3	2.1-4.6
		1-WAY 0.6-1.8	0.6-2.4	0.9-2.7	1.2-3.1	1.5-3.4	1.8-4.0	1.8-4.0	2.4-4.3	2.7-4.6
150 mm RD	Throw, m	Tot. Press., Pa Flow Rate, m³/s NC	4 0.028	6 0.038	9 0.047	12 0.057	17 0.066	21 0.076	33 0.092	48 0.111
		4-WAY 0.3-1.2	0.6-1.5	0.9-2.1	0.9-2.4	0.9-2.4	0.9-2.7	1.5-3.1	1.8-3.1	2.1-3.4
		3-WAY 0.3-1.2	0.6-1.8	0.9-2.4	0.9-2.7	0.9-3.1	1.2-3.1	1.5-3.4	1.8-4.0	2.1-4.3
		2-WAY 0.3-1.5	0.6-2.1	0.9-2.7	0.9-3.1	1.2-3.4	1.2-3.7	1.8-4.3	2.1-4.6	2.4-5.2
		1-WAY 0.6-1.8	0.9-2.7	0.9-3.4	1.2-3.4	1.5-3.7	1.8-4.0	2.1-4.6	2.7-4.9	3.1-5.2
175 mm RD	Throw, m	Tot. Press., Pa Flow Rate, m³/s NC	4 0.038	7 0.050	10 0.064	15 0.076	19 0.090	25 0.102	39 0.127	56 0.151
		4-WAY 0.3-1.5	0.6-1.8	0.9-2.7	0.9-3.1	1.2-3.1	1.2-3.4	1.8-3.7	2.4-4.0	2.7-4.3
		3-WAY 0.3-1.5	0.6-2.1	0.9-3.1	0.9-3.4	1.2-3.7	1.5-4.0	1.8-4.3	2.1-4.9	2.7-5.2
		2-WAY 0.3-1.8	0.6-2.7	0.9-3.4	1.2-3.7	1.5-4.3	1.5-4.6	2.1-5.2	2.7-5.5	3.1-6.1
		1-WAY 0.6-2.4	0.9-3.4	1.2-3.7	1.5-3.4	1.8-4.3	2.4-4.6	2.7-5.2	3.4-5.5	3.7-6.1
150 x 150	Throw, m	Tot. Press., Pa Flow Rate, m³/s NC	5 0.035	8 0.047	12 0.059	18 0.071	24 0.083	31 0.094	48 0.118	69 0.142
		4-WAY 0.3-1.5	0.6-1.8	0.9-2.4	0.9-2.7	1.2-2.7	1.2-3.1	1.8-3.4	2.1-3.7	2.4-4.0
		3-WAY 0.3-1.5	0.6-2.1	0.9-2.7	0.9-3.1	1.2-3.4	1.5-3.7	1.8-4.0	2.1-4.6	2.4-4.9
		2-WAY 0.3-1.8	0.6-2.4	0.9-3.1	1.2-3.7	1.5-4.0	1.5-4.3	2.1-4.9	2.4-5.2	2.7-5.8
		1-WAY 0.6-2.1	0.9-3.1	1.2-3.4	1.5-3.7	1.8-4.0	2.1-4.3	2.4-4.9	3.1-5.2	3.4-5.8
150 x 450	Throw, m	Tot. Press., Pa Flow Rate, m³/s NC	11 0.106	17 0.142	28 0.177	40 0.212	53 0.248	69 0.282	108 0.354	153 0.425
		4-WAY 1.5-4.6	1.8-5.2	2.4-5.8	3.1-6.4	3.4-6.7	4.0-7.3	4.9-8.2	5.2-9.2	5.8-9.8
		3-WAY 1.5-4.6	2.1-5.2	2.4-5.8	3.1-6.4	3.7-6.7	4.0-7.3	4.9-8.2	5.2-9.2	5.8-9.8
		2-WAY 1.5-4.6	2.1-5.2	2.7-5.8	3.4-6.4	4.0-6.7	4.3-7.3	4.9-8.2	5.2-9.2	5.8-9.8
		1-WAY 2.4-6.4	3.1-7.3	4.0-8.2	4.6-9.2	5.5-9.8	6.1-10.4	6.7-11.9	7.3-12.8	8.2-14.0
* 250 x 500	Neg Stat. Press., Pa Flow Rate, m³/s NC	8 0.217	13 0.288	19 0.363	28 0.434	39 0.510	50 0.578	78 0.722	113 0.864	154 1.010

* performance data for CPR.

400 x 400 Module Size

Duct Size	Neck Velocity, m/s Vel. Press., Pa	1.53 2	2.04 3	2.55 4	3.06 6	3.57 8	4.08 10	5.1 16	6.12 23	7.14 31
	Tot. Press., Pa Flow Rate, m³/s NC	3 0.019	5 0.026	7 0.033	10 0.038	14 0.045	18 0.052	28 0.064	40 0.078	54 0.090
125 mm RD	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.3-1.2 0.3-1.2 0.3-1.5 0.6-1.8	0.6-1.5 0.6-1.8 0.6-1.8 0.6-2.4	0.6-1.8 0.6-2.1 0.6-2.4 0.9-2.7	0.6-2.1 0.6-2.4 0.9-3.1 1.2-3.1	0.9-2.1 0.9-2.7 1.2-3.1 1.5-3.4	0.9-2.4 1.2-3.1 1.2-3.7 1.8-4.0	1.5-2.7 1.5-3.1 1.8-4.0 1.8-4.0	1.8-3.1 1.8-3.7 2.1-4.3 2.7-4.6
			-	-	14 19	19 23	27	33	38	42
150 mm RD	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.3-1.2 0.3-1.2 0.3-1.5 0.6-1.8	0.6-1.5 0.6-1.8 0.6-2.1 0.9-2.7	0.9-2.1 0.9-2.4 0.9-2.7 0.9-3.4	0.9-2.4 0.9-3.1 0.9-3.1 1.2-3.4	0.9-2.4 1.2-3.1 1.2-3.7 1.5-3.7	0.9-2.7 1.2-3.1 1.8-4.0 1.8-4.0	1.5-3.1 1.5-3.4 2.1-4.6 2.7-4.9	1.8-3.1 1.8-4.0 2.1-4.3 3.1-5.2
			-	-	17 22	22 26	30	36	41	45
175 mm RD or 150 x 150	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.3-1.5 0.3-1.5 0.3-1.8 0.6-2.4	0.6-1.8 0.6-2.1 0.6-2.7 0.9-3.4	0.9-2.7 0.9-3.1 0.9-3.4 1.2-3.7	0.9-3.1 1.2-3.1 1.5-4.3 1.5-4.0	1.2-3.1 1.2-3.7 1.5-4.6 1.8-4.3	1.2-3.4 1.5-4.0 2.1-5.2 2.4-4.6	1.8-3.7 1.8-4.3 2.7-5.5 2.7-5.2	2.4-4.0 2.1-4.9 3.1-6.1 3.7-6.1
			-	-	14 20	20 25	29	33	44	48
200 mm RD	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.3-1.8 0.3-1.8 0.3-2.1 0.9-2.7	0.6-2.4 0.6-2.4 0.6-3.1 1.2-3.7	1.2-3.1 1.2-3.4 1.2-3.7 1.5-4.0	1.2-3.4 1.2-4.0 1.2-4.3 1.8-4.3	1.2-3.7 1.5-4.0 1.5-4.6 2.1-4.6	1.5-3.7 1.5-4.3 1.8-5.2 2.4-5.2	1.8-4.0 2.1-4.9 2.4-5.8 3.1-5.8	2.4-4.3 2.7-5.5 3.1-6.4 4.0-6.7
			-	-	16 22	22 27	31	35	41	46
250 mm RD	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.3-2.4 0.3-2.4 0.3-2.7 0.3-3.4	0.6-3.1 0.6-3.1 0.6-3.7 1.2-4.3	1.2-3.7 1.2-4.0 1.2-4.3 2.1-5.2	1.2-4.0 1.8-4.6 1.8-5.5 2.4-5.5	1.8-4.3 2.1-5.2 2.1-5.8 2.7-5.8	2.1-4.3 2.1-5.5 2.4-6.4 3.1-6.4	2.4-5.2 2.7-6.1 3.1-7.0 3.7-7.0	3.1-5.5 3.4-6.7 4.3-8.5 4.6-8.5
			-	-	11 19	19 25	30 34	38	44	49
200 x 200	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.3-2.1 0.3-2.1 0.3-2.4 0.9-3.1	0.6-2.7 0.6-2.7 0.6-3.4 1.2-4.0	1.2-3.4 1.2-3.7 1.2-4.0 1.8-4.6	1.2-3.7 1.5-4.3 1.5-4.9 2.1-4.9	1.5-4.0 1.8-4.6 1.8-5.2 2.4-5.2	1.8-4.0 1.8-4.9 2.1-5.8 2.7-5.8	2.1-4.6 2.4-5.5 2.7-6.4 3.4-6.4	2.7-4.9 3.1-6.1 3.4-7.0 4.3-7.6
			-	-	9 17	23 28	32	36	42	47
* 350 x 350	Neg Stat. Press., Pa Flow Rate, m³/s NC	8 0.194	13 0.257	19 0.321	28 0.385	39 0.449	50 0.515	78 0.642	113 0.770	154 0.897

* performance data for CPR.

Guide Product Weights		
Approximate Weight in Kg.		
Size	CPR	CPS
300 x 300	1.35	1.75
600 x 600	1.98	2.38

CPS & CPR – Performance Data

500 x 500 Module Size

Duct Size	Neck Velocity, m/s Vel. Press., Pa	1.53 2	2.04 3	2.55 4	3.06 6	3.57 8	4.08 10	5.1 16	6.12 23	7.14 31
	Tot. Press., Pa Flow Rate, m³/s NC	3 0.019	5 0.026	7 0.033	10 0.038	14 0.045	18 0.052	28 0.064	40 0.078	54 0.090
125 mm RD	4-WAY Throw, m	0.3-1.2 0.3-1.2 0.3-1.5 0.6-1.8	0.6-1.5 0.6-1.8 0.6-2.4 0.6-2.4	0.6-1.8 0.6-2.1 0.6-2.4 0.9-2.7	0.6-2.1 0.6-2.4 0.9-3.1 1.2-3.1	0.9-2.1 0.9-2.7 1.2-3.1 1.5-3.4	0.9-2.4 1.2-3.1 1.2-3.7 1.8-4.0	1.5-2.7 1.5-3.1 1.8-4.0 1.8-4.0	1.8-3.1 1.8-3.7 2.1-4.3 2.4-4.3	1.8-3.1 1.8-4.0 2.1-4.6 2.7-4.6
150 mm RD	4-WAY Throw, m	0.3-1.2 0.3-1.2 0.3-1.5 0.6-1.8	0.6-1.5 0.6-1.8 0.6-2.1 0.9-2.7	0.9-2.1 0.9-2.4 0.9-2.7 0.9-3.4	0.9-2.4 0.9-3.1 0.9-3.1 1.4-3.4	0.9-2.4 1.2-3.1 1.2-3.7 1.5-3.7	0.9-2.7 1.2-3.1 1.8-4.3 1.8-4.0	1.5-3.1 1.5-3.4 2.1-4.6 2.1-4.6	1.8-3.1 1.8-4.0 2.1-4.6 2.4-5.2	2.1-3.4 2.1-4.3 2.4-5.2 3.1-5.2
175 mm RD or 150 x 150	4-WAY Throw, m	0.3-1.5 0.3-1.5 0.3-1.8 0.6-2.4	0.6-1.8 0.6-2.1 0.6-2.7 0.9-3.4	0.9-2.7 0.9-3.1 0.9-3.4 1.2-3.7	0.9-3.1 0.9-3.4 1.2-3.7 1.5-4.0	1.2-3.1 1.2-3.7 1.5-4.3 1.8-4.3	1.2-3.4 1.5-4.0 1.5-4.6 2.4-4.6	1.8-3.7 1.8-4.3 2.1-5.2 2.7-5.2	2.4-4.0 2.4-4.3 2.7-5.5 3.4-5.5	2.7-4.3 2.7-5.2 3.1-6.1 3.7-6.1
200 mm RD	4-WAY Throw, m	0.3-1.8 0.3-1.8 0.3-2.1 0.9-2.7	0.6-2.4 0.6-2.4 0.6-3.1 1.2-3.7	1.2-3.1 1.2-3.4 1.2-4.3 1.5-4.0	1.2-3.4 1.2-4.0 1.5-4.6 1.8-4.3	1.2-3.7 1.5-4.0 1.8-5.2 2.1-4.6	1.5-3.7 1.5-4.3 2.4-5.2 2.4-5.2	1.8-4.0 2.1-4.9 2.4-5.8 3.1-5.8	2.4-4.3 2.7-5.5 3.1-6.4 4.0-6.4	2.7-4.9 3.1-5.8 3.7-6.7 4.0-6.7
250 mm RD or 200 x 200	4-WAY Throw, m	0.3-2.4 0.3-2.4 0.3-2.7 0.9-3.4	0.6-3.1 0.6-3.1 0.6-3.7 1.2-4.3	1.2-3.7 1.2-4.0 1.2-4.3 1.2-5.2	1.2-4.0 1.8-4.6 1.8-5.5 2.4-5.5	1.8-4.3 2.1-5.2 2.1-5.8 2.7-5.8	2.1-4.3 2.1-5.5 2.4-6.4 3.1-6.4	2.4-5.2 2.7-6.1 3.1-7.0 3.7-7.0	3.1-5.5 3.4-6.7 3.7-7.6 4.6-7.6	3.4-6.1 3.7-7.0 4.3-8.5 4.6-8.5
300 mm RD	4-WAY Throw, m	0.6-2.1 0.6-3.1 0.6-3.4 0.9-4.3	0.9-3.7 0.9-4.0 0.9-4.6 1.5-5.5	1.5-4.3 1.5-4.9 1.5-5.5 2.1-6.1	1.5-4.9 1.8-5.2 2.1-6.1 2.4-6.4	1.8-5.2 2.1-5.5 2.4-6.4 3.4-7.0	2.1-5.5 2.7-6.1 3.7-8.5 4.6-8.5	2.7-6.1 3.7-6.4 4.6-9.5 5.5-9.5	3.7-6.4 4.0-8.2 4.6-8.5 5.2-10.1	4.3-7.0 4.6-8.5 5.2-10.1 9.5-10.1
350 mm RD	4-WAY Throw, m	0.6-3.1 0.6-3.4 0.9-3.7 1.2-4.9	1.2-4.0 1.2-4.3 1.2-5.2 1.8-6.1	1.8-4.9 1.8-5.5 2.4-7.0 2.4-7.0	1.8-5.5 2.1-6.1 3.1-7.9 3.1-7.3	2.1-5.8 2.4-7.0 3.4-8.8 3.7-7.9	2.4-6.1 3.1-7.3 4.0-9.5 4.0-8.8	3.4-7.0 3.7-7.9 5.2-10.7 5.2-9.5	4.0-7.3 4.3-9.2 5.2-10.7 6.1-10.7	4.9-7.9 5.2-9.5 5.8-11.3 6.7-11.3
250 x 250	4-WAY Throw, m	0.6-2.4 0.6-2.7 0.6-3.1 0.9-4.0	0.9-3.4 0.9-3.7 0.9-4.3 1.5-5.2	1.5-4.0 1.5-4.6 1.5-5.2 2.1-6.8	1.5-4.6 1.8-4.9 2.4-6.7 2.4-6.1	1.8-4.9 2.1-5.2 2.7-7.3 3.1-6.7	2.8 3.6 4.0 4.6	36 56 40 46	56 80 0.328 0.394	109 0.460 0.394 0.460
* 450 x 450	Neg Stat. Press., Pa Flow Rate, m³/s NC	8 0.319	13 0.425	19 0.529	28 0.637	39 0.746	50 0.850	78 1.060	113 1.270	154 1.490

* performance data for CPR.

600 x 600 Module Size

Duct Size	Neck Velocity, m/s Vel. Press., Pa	1.53 2	2.04 3	2.55 4	3.06 6	3.57 8	4.08 10	5.1 16	6.12 23	7.14 31
	Tot. Press., Pa Flow Rate, m³/s NC	3 0.019	5 0.026	7 0.033	10 0.038	14 0.045	18 0.052	28 0.064	40 0.078	54 0.090
125 mm RD	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.3-1.2 0.3-1.2 0.3-1.5 0.6-1.8	0.6-1.5 0.6-1.8 0.6-1.8 0.6-2.4	0.6-1.8 0.6-2.1 0.6-2.4 0.9-2.7	0.6-2.1 0.6-2.4 0.9-3.1 1.2-3.1	0.9-2.1 0.9-2.4 1.2-3.1 1.5-3.4	0.9-2.4 0.9-2.7 1.2-3.1 1.8-4.0	1.5-2.7 1.2-3.1 1.2-3.7 1.8-4.0	1.8-3.1 1.8-3.7 2.1-4.3 2.4-4.3
150 mm RD	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.3-1.2 0.3-1.2 0.3-1.5 0.6-1.8	0.6-1.5 0.6-1.8 0.6-2.1 0.9-2.7	0.9-2.1 0.9-2.4 0.9-2.7 0.9-3.4	0.9-2.4 0.9-2.7 0.9-3.1 1.2-3.4	0.9-2.4 0.9-2.7 1.2-3.1 1.8-4.0	1.5-3.1 1.5-3.4 1.8-4.3 2.1-4.6	1.8-3.1 1.8-4.0 2.1-4.3 2.7-4.6	
175 mm RD or 150 x 150	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.3-1.5 0.3-1.5 0.3-1.8 0.6-2.4	0.6-1.8 0.6-2.1 0.6-2.7 0.9-3.4	0.9-2.7 0.9-3.1 0.9-3.4 1.2-3.7	0.9-3.1 0.9-3.4 1.2-3.7 1.5-4.0	1.2-3.1 1.2-3.7 1.5-4.3 1.8-4.3	1.2-3.4 1.5-4.0 1.5-4.6 2.4-4.6	1.8-3.7 1.8-4.3 2.1-4.9 2.7-5.2	2.4-4.0 2.1-4.9 2.7-5.2 3.1-6.1
200 mm RD	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.3-1.8 0.3-1.8 0.3-2.1 0.9-2.7	0.6-2.4 0.6-2.4 0.6-3.1 1.2-3.7	1.2-3.1 1.2-3.4 1.2-3.7 1.5-4.0	1.2-3.4 1.2-4.0 1.2-4.3 1.8-4.3	1.2-3.7 1.5-4.0 1.5-4.6 2.1-4.6	1.5-3.7 1.5-4.3 1.8-5.2 2.4-5.2	1.8-4.0 2.1-4.9 2.7-5.5 3.1-6.4	2.4-4.3 2.7-5.5 3.1-5.8 4.0-6.7
250 mm RD or 200 x 200	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.3-2.4 0.3-2.4 0.3-2.7 0.3-3.4	0.6-3.1 0.6-3.1 0.6-3.7 1.2-4.3	1.2-3.7 1.2-4.0 1.2-4.3 2.1-5.2	1.2-4.0 1.8-4.6 1.8-5.5 2.4-5.5	1.8-4.3 2.1-5.2 2.1-5.8 2.7-5.8	2.1-4.3 2.1-5.5 2.4-6.4 3.1-6.4	2.4-5.2 2.7-6.1 3.1-7.0 3.7-7.0	3.1-5.5 3.4-6.7 3.7-7.6 4.6-7.6
300 mm RD or 250 x 250	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.6-2.4 0.6-3.1 0.6-3.4 0.9-4.3	0.9-3.7 0.9-4.0 0.9-4.6 1.5-5.5	1.5-4.3 1.5-4.9 1.5-5.5 2.1-6.1	1.5-4.9 1.8-5.5 2.1-6.1 2.4-6.4	1.8-5.2 2.1-6.1 2.4-7.0 3.4-7.0	2.1-5.5 2.4-6.4 2.7-7.6 3.4-7.6	2.7-6.1 3.4-7.0 3.7-8.5 4.6-8.5	3.7-6.4 4.0-8.2 4.6-9.5 5.5-9.5
350 mm RD	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.6-3.1 0.6-3.4 0.9-3.7 1.2-4.9	1.2-4.0 1.2-4.3 1.2-5.2 1.8-6.1	1.8-4.9 1.8-5.5 1.8-6.1 2.4-7.0	1.8-5.5 2.1-6.1 2.4-7.0 3.1-7.3	2.1-5.8 2.4-7.0 3.1-7.9 3.7-7.9	2.4-6.1 3.1-7.3 3.4-8.8 4.0-8.8	3.4-7.0 3.7-7.9 4.0-9.5 5.2-9.5	4.0-7.3 4.3-9.2 5.2-10.7 6.1-10.7
400 mm RD	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.6-3.7 0.9-3.7 1.2-4.3 1.5-5.5	1.5-4.6 1.5-5.2 1.5-5.8 2.4-7.3	1.8-5.8 1.8-6.1 1.8-7.3 2.7-7.9	2.4-6.1 2.4-7.6 2.7-8.5 3.4-8.5	2.7-6.4 2.7-7.9 3.4-9.5 4.0-9.5	3.4-7.3 3.4-8.5 4.0-10.1 4.6-10.1	4.0-7.9 4.3-9.8 4.6-11.3 5.8-11.3	4.6-8.5 5.2-10.4 5.8-12.2 7.3-12.2
300 x 300	Throw, m	4-WAY 3-WAY 2-WAY 1-WAY	0.6-3.1 0.6-3.1 0.6-3.7 1.2-4.6	1.2-4.0 1.2-4.3 1.2-4.9 2.1-6.1	1.5-4.9 1.5-5.2 1.5-6.1 2.4-6.7	2.1-5.2 2.1-6.4 2.4-7.3 3.1-7.3	2.4-5.5 2.4-6.7 2.7-7.9 3.4-7.9	2.7-6.1 2.7-7.3 3.4-8.5 4.0-8.5	3.4-6.7 3.7-8.2 4.0-9.5 4.9-9.5	4.0-7.3 4.3-8.8 4.9-10.4 6.1-10.4
* 550 x 550	Neg Stat. Press., Pa Flow Rate, m³/s NC	8 0.472 19	12 0.264 27	19 0.331 33	28 0.397 38	37 0.463 42	48 0.529 46	75 0.661 52	108 0.793 57	147 0.924 58
	Neg Stat. Press., Pa Flow Rate, m³/s NC	13 0.637 20	19 0.793 27	21 0.283 30	29 0.331 35	37 0.378 39	58 0.472 43	83 0.567 49	113 0.661 54	113 0.661 58
	Neg Stat. Press., Pa Flow Rate, m³/s NC	11 0.472 11	20 0.637 20	24 0.793 27	30 0.954 33	39 1.100 38	50 1.270 42	78 1.590 49	113 1.900 56	154 2.220 61

* performance data for CPR.