
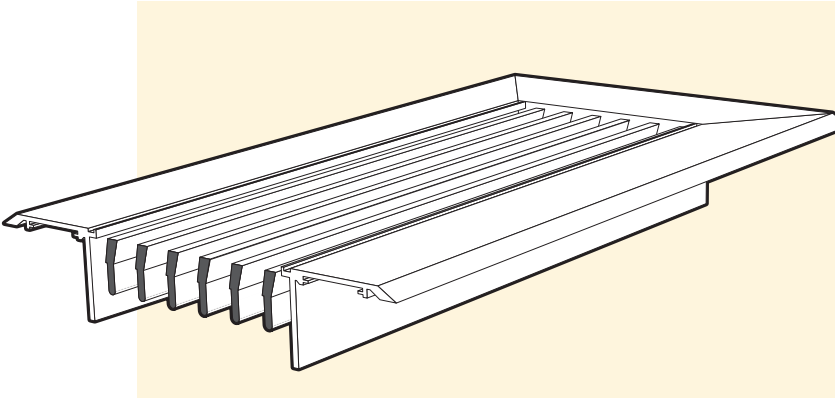


LD – Selection Data


Model: **LD-1215**

- 15° deflection
- 12.5mm spacing
- 3.2mm louver



Dimensions

| D | A | Number |
|-------------|---------|---------|
| Listed Size | Opening | of Bars |
| 50.0 | 21.0 | 2 |
| 62.5 | 33.5 | 3 |
| 75.0 | 46.0 | 4 |
| 87.5 | 58.5 | 5 |
| 100.0 | 71.0 | 6 |
| 125.0 | 96.0 | 8 |
| 150.0 | 121.0 | 10 |

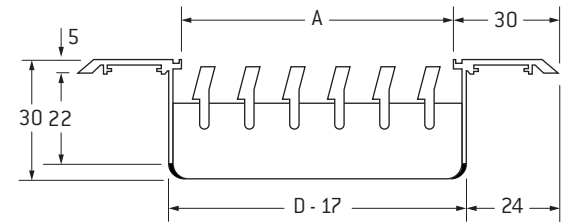

The same basic extruded design as LD-615 Linear Diffuser except that the 3.2mm x 16mm fixed bar-type louvers are spaced on 12.5mm centres.

The wider spaced louvers make this diffuser ideal on applications where greater capacity is needed and more free area is desired.

Use as supply or return. Equally efficient for heating, cooling, ventilating.

The LD 1215 is available with alternate frame types, refer to page 51B. When used with the PMF System, see notes on page 68B.

Not suitable for floor applications.

| Size & Area m ² /m | Total Pressure | | 3 | 5 | 9 | 15 | 20 | 28 | 36 | 46 | 57 |
|----------------------------------|--------------------------|---------------|---------|---------|---------|---------|---------|----------|----------|----------|-----------|
| 50mm | Flow m ³ /s/m | | 0.034 | 0.053 | 0.070 | 0.087 | 0.104 | 0.121 | 0.140 | 0.157 | 0.174 |
| | NC | | - | - | 19 | 25 | 30 | 35 | 39 | 43 | 46 |
| 0.015 | Throw, m | Sill or Floor | 0.3-0.3 | 1.2-1.2 | 2.1-2.1 | 2.7-3.0 | 3.4-4.0 | 3.7-4.9 | 4.3-5.5 | 4.6-6.1 | 5.5-6.4 |
| | | Side Wall | 0.9-2.1 | 1.5-3.7 | 2.1-4.9 | 2.7-6.1 | 3.4-7.0 | 3.7-7.6 | 4.3-8.2 | 4.6-9.0 | 5.5-10.4 |
| 62.5mm | Flow m ³ /s/m | | 0.047 | 0.070 | 0.093 | 0.116 | 0.140 | 0.163 | 0.186 | 0.209 | 0.233 |
| | NC | | - | - | 18 | 24 | 29 | 34 | 38 | 42 | 45 |
| 0.021 | Throw, m | Sill or Floor | 0.3-0.3 | 1.5-1.5 | 2.4-2.7 | 3.4-3.7 | 4.0-4.6 | 4.6-5.5 | 5.2-6.4 | 6.1-6.7 | 6.7-7.0 |
| | | Side Wall | 1.2-2.4 | 1.8-4.0 | 2.4-5.2 | 3.4-6.4 | 4.0-7.6 | 4.6-8.2 | 5.2-9.5 | 6.1-10.7 | 6.7-11.6 |
| 75mm | Flow m ³ /s/m | | 0.057 | 0.087 | 0.115 | 0.144 | 0.174 | 0.202 | 0.231 | 0.259 | 0.288 |
| | NC | | - | - | 17 | 23 | 28 | 33 | 37 | 41 | 44 |
| 0.025 | Throw, m | Sill or Floor | 0.6-0.6 | 1.8-1.8 | 3.0-3.0 | 3.7-4.0 | 4.6-5.2 | 5.5-6.1 | 6.1-7.0 | 7.0-7.3 | 7.6-7.6 |
| | | Side Wall | 1.2-2.7 | 2.1-4.3 | 3.0-5.5 | 3.7-6.7 | 4.6-7.9 | 5.5-9.2 | 6.1-10.1 | 7.0-11.3 | 7.6-12.2 |
| 87.5mm | Flow m ³ /s/m | | 0.070 | 0.105 | 0.140 | 0.175 | 0.210 | 0.245 | 0.281 | 0.315 | 0.350 |
| | NC | | - | - | 17 | 23 | 28 | 33 | 37 | 41 | 44 |
| 0.030 | Throw, m | Sill or Floor | 0.6-0.6 | 2.1-2.1 | 3.7-3.7 | 4.3-4.6 | 5.2-5.8 | 6.1-6.7 | 6.7-7.3 | 7.6-7.9 | 8.2-8.2 |
| | | Side Wall | 1.5-3.1 | 2.4-4.6 | 3.7-6.1 | 4.3-7.0 | 5.2-8.2 | 6.1-9.5 | 6.7-10.7 | 7.6-11.9 | 8.2-12.8 |
| 100mm | Flow m ³ /s/m | | 0.082 | 0.126 | 0.164 | 0.206 | 0.248 | 0.288 | 0.329 | 0.370 | 0.412 |
| | NC | | - | - | 18 | 24 | 29 | 34 | 38 | 42 | 45 |
| 0.036 | Throw, m | Sill or Floor | 0.9-0.9 | 2.4-2.7 | 4.0-4.0 | 4.6-4.9 | 5.8-6.1 | 6.7-7.0 | 7.3-7.6 | 7.9-8.2 | 9.2-9.2 |
| | | Side Wall | 1.8-3.4 | 2.7-4.9 | 4.0-6.4 | 4.6-7.3 | 5.8-8.8 | 6.7-10.1 | 7.3-11.0 | 7.9-12.2 | 9.2-13.4 |
| 125mm | Flow m ³ /s/m | | 0.107 | 0.161 | 0.214 | 0.268 | 0.322 | 0.375 | 0.429 | 0.484 | 0.536 |
| | NC | | - | 10 | 18 | 24 | 29 | 34 | 38 | 42 | 45 |
| 0.047 | Throw, m | Sill or Floor | 1.2-1.2 | 2.7-2.7 | 4.3-4.3 | 5.2-5.2 | 6.1-6.7 | 7.3-7.3 | 8.0-8.2 | 8.8-8.8 | 9.8-9.8 |
| | | Side Wall | 2.4-4.0 | 3.4-5.5 | 4.6-7.0 | 5.2-7.9 | 6.1-9.5 | 7.3-10.7 | 8.0-11.6 | 8.8-12.8 | 9.8-14.0 |
| 150mm | Flow m ³ /s/m | | 0.132 | 0.197 | 0.264 | 0.329 | 0.394 | 0.459 | 0.525 | 0.592 | 0.657 |
| | NC | | - | - | 18 | 24 | 29 | 34 | 38 | 42 | 45 |
| 0.058 | Throw, m | Sill or Floor | 1.5-1.5 | 3.0-3.0 | 4.6-4.6 | 5.5-5.5 | 7.0-7.0 | 7.6-7.6 | 8.5-8.5 | 9.2-9.2 | 10.4-10.4 |
| | | Side Wall | 2.7-4.3 | 4.0-6.1 | 4.9-7.3 | 6.1-8.5 | 7.1-9.8 | 7.6-11.0 | 8.5-11.9 | 9.5-13.1 | 10.7-14.3 |

| Guide Product Weights | |
|-----------------------|--|
| Model | Approximate Weight in Kg per metre x 150mm |
| LD1215 | 1.8 |

Fineline Diffusers

SERIES LD linear bar grilles are designed for supply and return air distribution in heating, cooling and ventilating applications which call for diffusers having long or continuous slender appearance, fixed air discharge angles of zero or 15 degrees, and installed in walls, floors, sills or ceilings.

CONSTRUCTION is of extruded aluminium face, bars and frame of alloy 6063-T5, notched mullions, mechanically compressed together to form a powerfully bonded core, which is welded at mullion ends to the frame. 'F' models for floor use, have double mullions and 30 x 30 x 15 x 3 Solid 'Z' frames.

| Model | Bar | | |
|------------|----------|------------|------------|
| | Width mm | Spacing mm | Deflection |
| LD-600 | 3.25 | 6.35 | 0° |
| LD-615 | 3.25 | 6.35 | 15° |
| LD-1200 | 3.25 | 12.5 | 0° |
| LD-1215 | 3.25 | 12.5 | 15° |
| LDH-1200 | 5.6 | 12.5 | 0° |
| LDHF-1200+ | 5.6 | 12.5 | 0° |
| LDH-1215 | 5.6 | 12.5 | 15° |
| LDHF-1215+ | 5.6 | 12.5 | 15° |
| LDH-2500* | 5.6 | 25 | 0° |
| LDH-2515* | 5.6 | 25 | 15° |

* Return/Exhaust Diffuser + Suitable for floor applications

WIDTH maximum for 'F' models is:

Continuous traffic: 200mm, Occasional traffic: 300mm. All models can be furnished with mitred 90° corners, or other angles where templates are furnished to the factory. Refer illustrations on this sheet for corner descriptions. The minimum length is 200mm. The maximum length for a single section is 2.8m.

Accessory Damper

Available with opposed blade dampers, screwdriver operated through the face. Specify OBD#1.

Notes

General Notes to be read in conjunction with performance tables on the following pages.

This data is reliable information for cooling, ventilating and heating applications.

1. All pressures are Pa (N/m²).


2. Minimum throw values refer to a terminal velocity of 0.75 m/s and maximum to 0.25 m/s, for a 1200mm active section with a cooling temperature differential of 12°C.

The multiplier factors listed in the table below are applicable for other lengths.


| Active Length | Terminal Velocity | |
|----------------------|-------------------|----------|
| | 0.75 m/s | 0.25 m/s |
| 300mm | 0.5 | 0.7 |
| 3000mm Or Continuous | 1.6 | 1.2 |

Mitred Corners


Outside corner (Side wall)

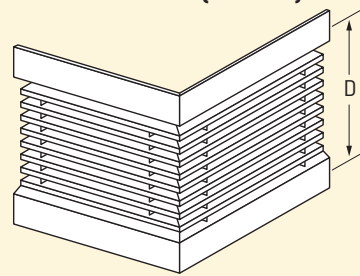

Inside corner (Side wall)

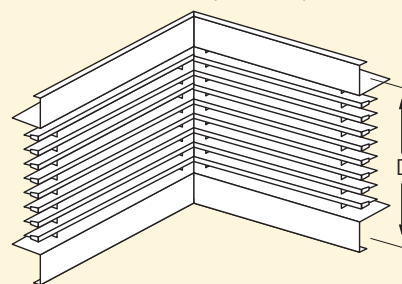

Floor, Ceiling or Sill



Note: When specifying corners ensure to nominate the blade orientation (up or down) if using the 15° blade.

3. The NC values are based on a room absorption of 10dB, re 10⁻¹² watts and a 3000mm active section.

Use the following multipliers for other active lengths.

| NC CORRECTION FOR LENGTH | | | | | | | | | | | |
|--------------------------|-----|-----|------|------|------|------|------|------|------|------|------|
| Active Length, mm | 300 | 600 | 1000 | 1200 | 1800 | 2400 | 3000 | 4500 | 6000 | 7500 | 9000 |
| | -10 | -7 | -5 | -4 | -2 | -1 | 0 | +2 | +3 | +4 | +5 |

4. Return Intake - When used as a return intake the NC value given will be increased by 4 and the negative static pressure will be 0.8 times the total pressure shown.

LD, LDH, LDHF, LDSD & PMF

Diffuser Description Code Examples and Suggested Specifications

| | | | | | | | | | | | | |
|---|---|--|---|-------------|---|-------------------|---|-------------------------------|---|-----------------------|---|--|
| LD LDH LDHF LDSD | – | 600 615 1200 1215 2500* 2515* Floor Grilles | – | 1 | – | 2100 x 100 | – | OBD | – | RC | – | FINISH |
| Series | | Blade Configuration (Spacing/deflection) | | Frame Style | | Duct Size | | Optional Opposed Blade Damper | | Removeable Core Frame | | Holyoake White Mill Aluminium or Powder Coat |

* Return/Exhaust Grilles, not suitable for floor applications.

The Holyoake LD Range of linear diffusers shall be of extruded aluminium construction. Blades shall be mechanically expanded into notched mullions spaced at nominal centres. Diffusers shall be fitted with accessory dampers and have optional frame styles and finish where indicated.

All shall be as manufactured by Holyoake.

| | | | | | | | | | | |
|------------|---|----------------|---|------------------|---|-------------|---|-------------------------------|---|--|
| LDH | – | CF | – | 600 x 600 | – | x 32 | – | OBD | – | FINISH |
| Series | | Computer Floor | | Module Size | | Tile Depth | | Optional Opposed Blade Damper | | Holyoake White Mill Aluminium or Powder Coat |

Holyoake LDH-CF Computer Floor supply grilles shall be of extruded aluminium, welded construction, with blades mechanically expanded into double, notched mullions spaced at nominal centres. They shall be designed to withstand a concentrated load of 500 kg over an area of 645mm² (1 square inch) at the centre, with no permanent distortion and maximum deflection under load of 0.66mm. Accessory volume control dampers, adjustable through the face, shall be furnished where indicated.

The whole assembly shall be as manufactured by Holyoake.

| | | | | | | | | | | |
|------------------------|---|--------------------------------------|---|--|---|-----------------------------------|---|------------|---|--|
| PMF | – | LD LDH LF | – | 600+ 615+ 1200 1215 2500* 2515* | – | SD | – | WxH | – | FINISH |
| Plaster Mounting Frame | | Bar Grille Series | | Blade Configuration (Spacing/deflection) | | Optional - Adjustable Rear Blades | | Duct Size | | Holyoake White Mill Aluminium or Powder Coat |

* Return/Exhaust Grilles, not suitable for floor applications. +See Notes on Page 68B.

Holyoake Series PMF – Plaster Mounting Frame shall be of extruded aluminium construction.

PMF Grilles shall have a flange width no greater than 6mm.

The Plaster Mounting Frame shall be fixed into a wall opening and plaster stopped before fitting of the Flangeless Grille. The Grille shall have blades notched into mullions spaced at nominal centres and may have a second row of adjustable 'SD' blades if specified.

All shall be as manufactured by Holyoake.

Note When LD Variants are ceiling mounted, seismic restraints are required, but not supplied.