
atlantis

Note: Drain position central unless dimensioned otherwise Step Entry Level Entry SKU: LQ-HEL-B-LE SKU: LQ-HEL-B-ST 1,500 o/a 1,500 o/a 1,480 1,480 See Waste Channel **Recess Specifications** Upstand Upstand 987 To centre line of glazing 484.5 484.5 987 To centre line of glazing for size to 3 sides to 3 sides 1,010 o/a 1,060 o/a Fall__ Fall 995 Floor Recess 484.5 1500x1040x36 484 **Glazing Channel Glazing Channel** Countersunk Screw Holes **Drain Section Drain Section** Edge Section **Edge Section** 1:80 Slope 1:80 Slope Floor Level 8mm Toughened Safety Glass Screen Framing 8 18±2 Factory Fitted 8mm Toughened Safety Glass Screens Glazing Channel Waterproofing J10₁10₁ ₂|10_|10_| Flange Upstand Upstand Factory fitted on side wall on side wall Countersunk Glazing Channel Screw Holes _F<u>loor</u> Level

Note: Verify exact shower base dimensions on site

Screen Options:

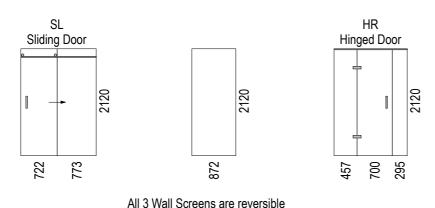

□ 31

Shower Floor

See Waste Channel Recess

Specifications for depth

information under floor

Floor Level

For more product information go to:

See Waste Channel Recess

Specifications for depth

information under floor

Shower Floor

www.atlantis.co.nz/shop/linea-quattro/helsinki-1500x1000/

Recess Level Recess

40

Depth

For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness





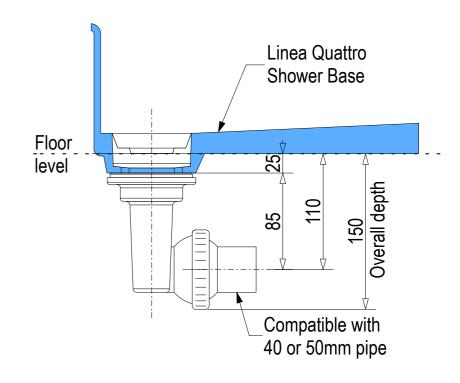

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



