
Note: Drain position central unless dimensioned otherwise Level Entry SKU: LQ-EDI-B-LE Step Entry SKU: LQ-EDI-B-ST 1,300 o/a 1,300 o/a 1,280 1,280 10 See Waste Channel **Recess Specifications** Upstand Upstand 997 To centre line of glazing 997 To centre line of glazing to 3 sides to 3 sides 1,020 o/a 979 1,070 o/a 1,005 979 Fall Floor Recess 1300x1040x30 **Glazing Channel Glazing Channel** Countersunk Screw Holes **Drain Section** Edge Section **Drain Section** Edge Section 1:80 Slope 1:80 Slope Floor Level 8mm Toughened Safety Glass Screen - Wall Framing Framing 8 18±2 Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens □ 10 10 □ 110|10 Waterproofing Upstand Upstand Flange on side wall on side wall Factory fitted 27 Countersunk Glazing Channel Screw Holes Floor Level Shower Floor Shower Floor

Note: Verify exact shower base dimensions on site

Screen Options:

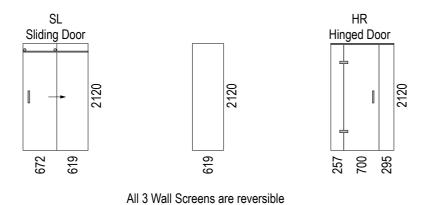

<u>Floor</u>

Level

See Waste Channel Recess

Specifications for depth

information under floor

_⊲ 31

For more product information go to:

See Waste Channel Recess

Specifications for depth

information under floor

www.atlantis.co.nz/shop/linea-quattro/edinburgh-1300x1000-2/

Recess Level

16

40

Recess


Depth


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



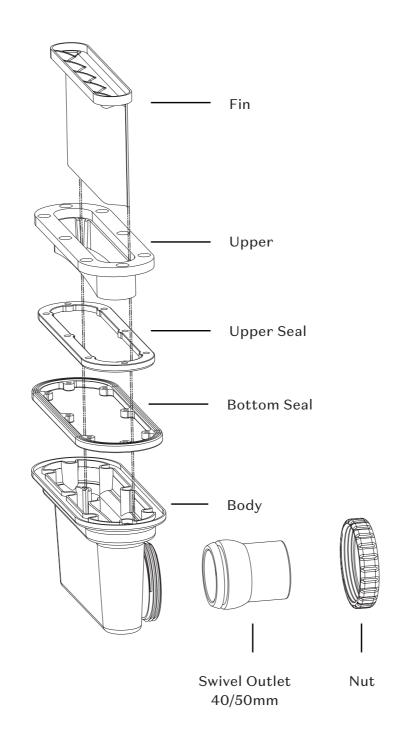

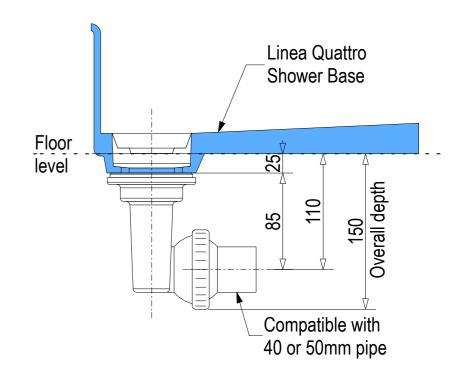

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



