
Note: Drain position central unless dimensioned otherwise Level Entry SKU: LQ-TOK-B-LE Step Entry SKU: LQ-TOK-B-ST 1,800 o/a 1,800 o/a 1,780 1,780 10 See Waste Channel **Recess Specifications** for size 897 To centre line of glazing 897 To centre line of glazing Upstand Upstand 920 o/a 879 970 o/a 905 879 to 3 sides Fa to 3 sides Fa Floor Recess 1800x940x36 Countersunk Glazing Channel Glazing Channel Screw Holes **Drain Section Edge Section Drain Section Edge Section** 1:80 Slope 1:80 Slope Floor Level Floor Level 8mm Toughened Safety Glass Screen 8 18±2 Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens Waterproofing 110 10 110 10 Flange Upstand Upstand Factory fitted Glazing Channel on side wall on side wall Countersunk Screw Holes _Floor Level Shower Floor Shower Floor Recess Floor_ Recess. Depth Level 16 40 Level _⊲ 31 ⊳ See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth information under floor information under floor Note: Verify exact shower base dimensions on site

Screen Options:

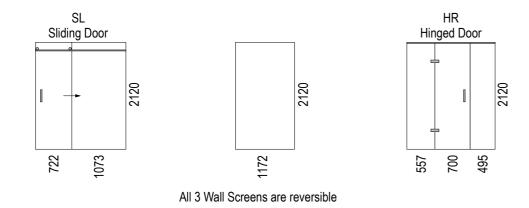

For more product information go to:


www.atlantis.co.nz/shop/linea-quattro/tokyo-1800x900/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



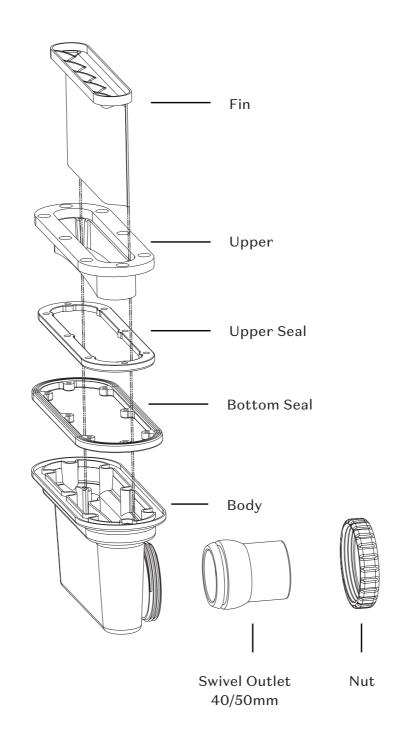

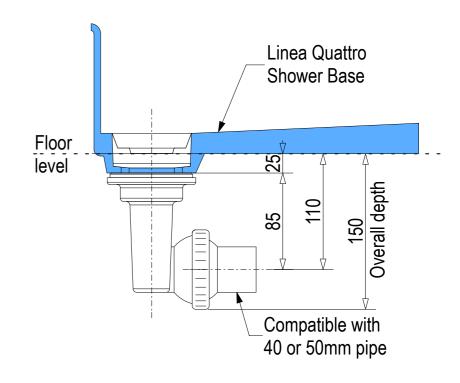

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



