
Note: Drain position central unless dimensioned otherwise Step Entry Level Entry SKU: LQ-KAN-B-LH-LE SKU: LQ-KAN-B-LH-ST 1,660 o/a 1,610 o/a 1,595 784.5 784.5 784.5 784.5 16 See Waste Channel **Recess Specifications** 877 To centre line of glazing 877 To centre line of glazing for size Upstand Upstand Countersunk 995 895 869 to 2 sides Screw Holes to 2 sides Fall Fa Floor Recess 1630x930x27 Glazing Channel Glazing Channel _∤ સ્ત્ર⊬ 1,577
To centre line of glazing 10_ 1,577
To centre line of glazing **Drain Section Drain Section Edge Section Edge Section** 1:80 Slope 1:80 Slope Floor Level Floor Level 8mm Toughened Safety Glass Screen 8 18±2 Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens 110 10 Waterproofing Upstand Upstand Flange on side wall on side wal Factory fitted Countersunk Glazing Channel Screw Holes _Floor Level Shower Floor Shower Floor

Note: Verify exact shower base dimensions on site

Screen Options:




See Waste Channel Recess

Specifications for depth

information under floor

Floor Level

31



For more product information go to:

See Waste Channel Recess

Specifications for depth

information under floor

www.atlantis.co.nz/shop/linea-quattro/kansas-1600x900/

Recess

16

40

Level

Recess


Depth


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



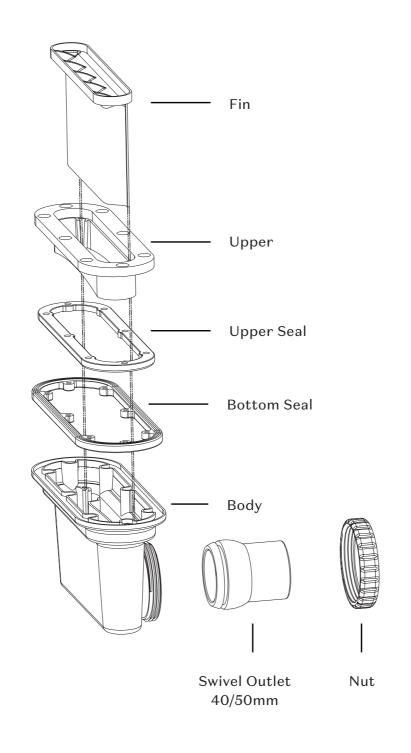

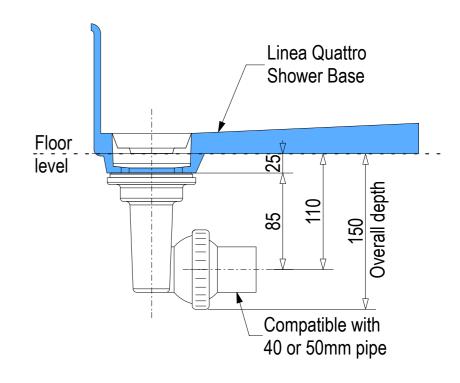

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



