


Note: Drain position central unless dimensioned otherwise Step Entry Level Entry SKU: LQ-SIN-RH-LE SKU: LQ-SIN-RH-ST 2,000 o/a 2,000 o/a 1,980 10 1,980 10 See Waste Channel **Recess Specifications** for size 887 line of glazing Upstand 434.5 Upstand 434.5 887 To centre line of glazing to 3 sides to 3 sides 910 o/a 960 o/a 895 Fall \_Fall\_ Floor Recess 434.5 434.5 2000x940x34 Countersunk Glazing Channel **Glazing Channel** Screw Holes **Drain Section Drain Section Edge Section Edge Section** 1:80 Slope 1:80 Slope Floor Level Floor Level Floor 8mm Toughened Safety Glass Screen - Wall Framing Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens 110|10 Waterproofing 110 10 Upstand Upstand Flange Factory fitted Glazing Channel on side wall on side wall Countersunk Screw Holes \_Floor Level Shower Floor Shower Floor Recess Floor Recess Depth Level Level \_16 40 <sub>⊲</sub> 31 See Waste Channel Recess See Waste Channel Recess


Note: Verify exact shower base dimensions on site

## Screen **Options:**



Specifications for depth

information under floor



## For more product information go to:

Specifications for depth

information under floor


www.atlantis.co.nz/shop/linea-quattro/singapore-2000x900/


## For installation instructions go to:


www.atlantis.co.nz/trade/installation/

## AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



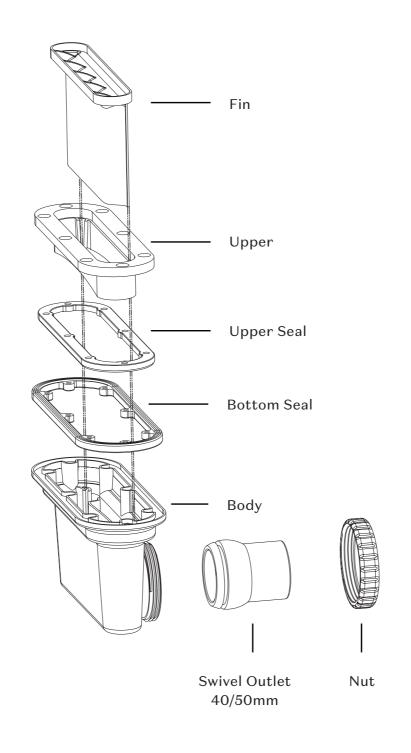

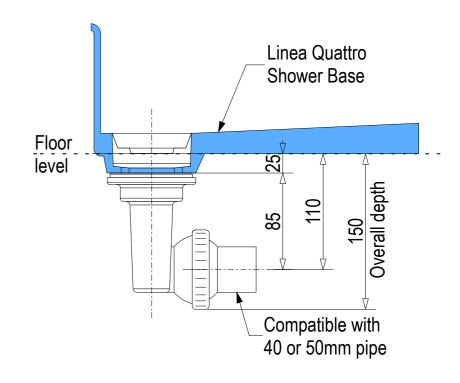

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



