



## PLANK PRIME GRADE SPECIFICATION SHEET

Urban Collection Engineered Locking plank by Forté.  
14mm thick, 190mm wide and 1.83m length. Glue down  
installation method onto substrate. Prime grade, pre-  
finished with Bona® Matte Lacquer.

### PRODUCT DETAILS

Collection	Urban
Product Type	Engineered Plank
Availability	Stocked
Total Thickness	14mm
Width	190mm
Length	1830mm
% of Shorts	Up to 33%
Wear Layer	3mm Solid European Oak
Core	Hevea
Backing	Birch
Construction	3-layer Engineered
Re-sands	Approximately 1-2 (approx. 1mm removed per re-sand)
Surface Texture	Brushed
Surface Sheen	Matte (Gloss Level 8-12%)
Bevel	Micro-bevel 4 sides
Status	Pre-finished (no additional coats required)
Finish	Bona® Matte Lacquer (7 Coats)
Species	European Oak PEFC® Certified
Wood Grade	Prime - refer to page 2 for details)
Filler Colour	Dark

The Urban Collection is also available in: Selected feature grade planks and Stair Nosing.


### STRUCTURAL WARRANTY

5 Year Commercial	For terms and conditions see
25 Year Residential	<a href="http://www.forte.co.nz/warranties">www.forte.co.nz/warranties</a>

### SUSTAINABILITY

PEFC® Certified


Images are colour representation only



Athens



Copenhagen



New York

### INSTALLATION

Installation Method	Glue down (preferred) or floating (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Välinge 5G Click®
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

### TECHNICAL SPECIFICATIONS


Reaction to Fire (Floors)	Critical Flux 5.0kw/m²
Reaction to Fire (Walls and Ceilings)	Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating)
Wear Layer Density	700kg/m³
Formaldehyde Emission	
AS/NZS 2098.11	E0 (0.1mg/L) No Added Formaldehyde
Slip Ratings	
AS/NZS 4586 Dry Test	Classification F, Mean COF 0.65
AS/NZS 4586 Wet Test	Classification X, Pendulum Mean 39 BPN

### PACK INFORMATION

Pack Size	2.086m²
Pieces per pack	4 full planks, and up to 2 split plank
Pack Weight	18.4kg
Pack Dimensions	W 207mm x L 1845mm x H 90mm

# Plank Profile

## URBAN PLANK

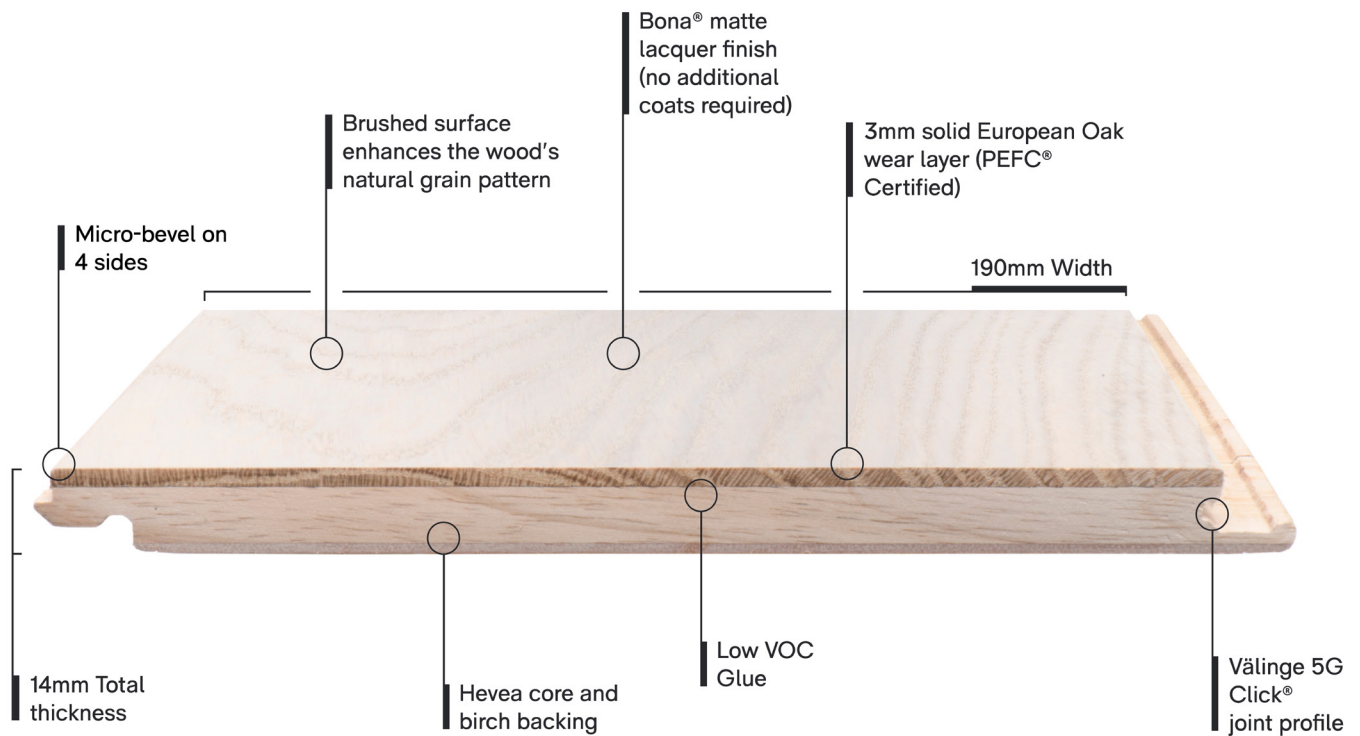

## URBAN – PRIME GRADE



An Urban prime grade plank will typically contain slight natural colour variation. This grade allows for fewer and smaller knots and sapwood. Small cracks and checks may be present and are finished with a dark shade of filler.

# Care and Maintenance

## RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

---

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit [www.forte.co.nz/careandmaintenance](http://www.forte.co.nz/careandmaintenance)

# Structural Warranty

## URBAN 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

---

The Urban Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

## URBAN 5 YEAR COMMERCIAL STRUCTURAL WARRANTY

---

The Urban Collection comes with a full 5 year Commercial Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

# Installation

## THE URBAN COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

---

Please ensure that you have read and understood the installation guidelines before proceeding to install Urban timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit [www.forte.co.nz/installation](http://www.forte.co.nz/installation)