


Note: Drain position central unless dimensioned otherwise Step Entry SKU: LQ-HOU-B-ST Level Entry SKU: LQ-HOU-B-LE 1,900 o/a 1,900 o/a 1,880 1,880 10 See Waste Channel **Recess Specifications** for size 997 To centre line of glazing 997 To centre line of glazing ,020 o/a 1,070 o/a 1,005 Upstand Upstand 979 Floor Recess Fa Fa to 3 sides to 3 sides 1900x1040x30 Countersunk **Glazing Channel Glazing Channel** Screw Holes **Drain Section** Edge Section **Drain Section Edge Section** 1:80 Slope 1:80 Slope Floor Level 8mm Toughened Safety Glass Screen - Wall Framing Framing 8 18±2 Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens □|10_|10| 110 10 Waterproofing Upstand Upstand Flange on side wall on side wall Factory fitted 27 Countersunk Glazing Channel Screw Holes _F<u>loor</u> Level Shower Floor Shower Floor Recess Level <u>Floor</u> Recess Level 16 40 Depth _⊲ 31 See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth information under floor information under floor Note: Verify exact shower base dimensions on site

Screen Options:

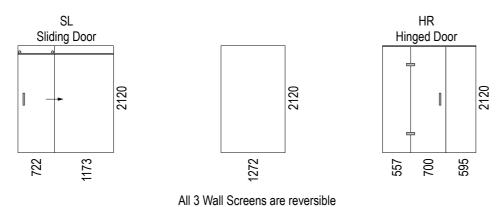

For more product information go to:

www.atlantis.co.nz/shop/linea-quattro/houston-1900x1000/

For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness





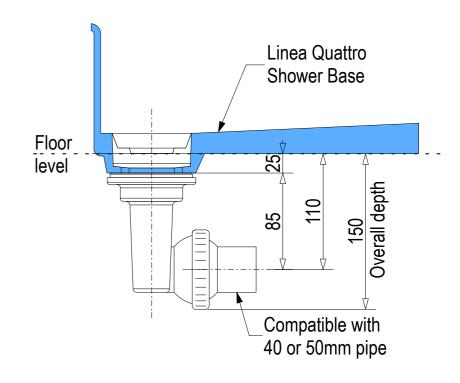

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



