
Note: Drain position central unless dimensioned otherwise Level Entry SKU: LQ-LON-RH-LE Step Entry SKU: LQ-LON-RH-ST 2,000 o/a 2,000 o/a 1,980 1,0 1,980 1,0 See Waste Channel **Recess Specifications** for size 484.5 484.5 987 To centre line of glazing Upstand Upstand 987 To centre line of glazing to 3 sides to 3 sides 1,010 o/a Fall Fall 1,060 Floor Recess 2000x1040x36 484 Countersunk **Glazing Channel** Glazing Channel Screw Holes **Drain Section** Drain Section **Edge Section Edge Section** 1:80 Slope 1:80 Slope Floor Floor Floor Level Level Level 8mm Toughened Safety Glass Screen 8 18±2 Factory Fitted 8mm Toughened Safety Glass Screens Glazing Channel Waterproofing 110|10 ₂|10_|10_| Flange Upstand Upstand Factory fitted on side wall on side wall Countersunk Glazing Channel Screw Holes _F<u>loor</u> Level Shower Floor Shower Floor Recess Floor Level Recess Level Depth 40 □ 31

Note: Verify exact shower base dimensions on site

Screen Options:

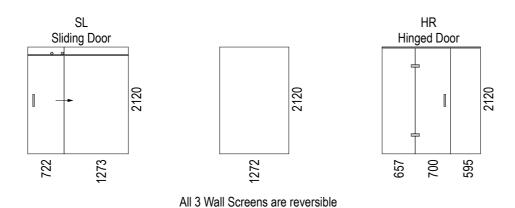

See Waste Channel Recess

Specifications for depth

information under floor

For more product information go to:

See Waste Channel Recess

Specifications for depth

information under floor


www.atlantis.co.nz/shop/linea-quattro/london-2000x1000/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



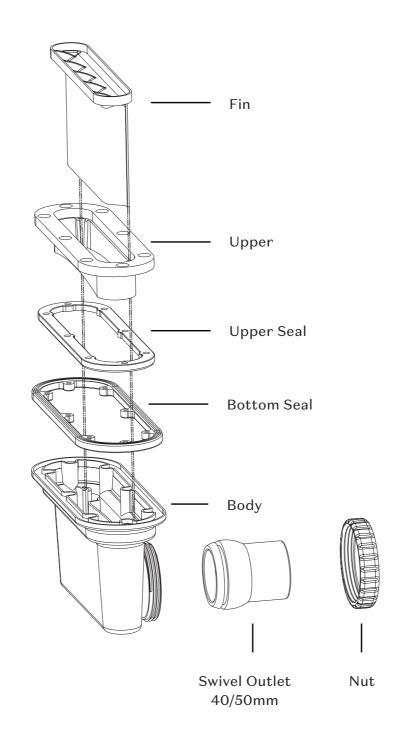

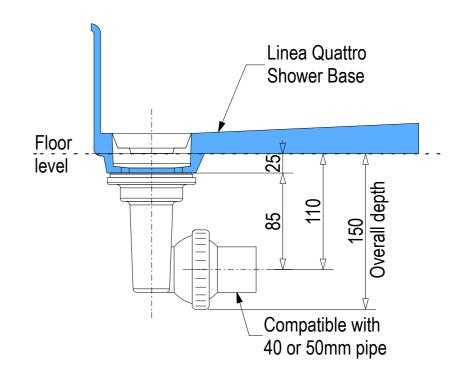

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



