ACCESSORIES - Opposed Blade Dampers

Models: OBD-1, OBD-2 and OBD-3


Control dampers for fixed volume balancing and adjustment. Available in three configurations for the following applications:

OBD-1: Sidewall, eye-lash and bar grilles with screwdriver operator. Extruded black anodised Aluminium construction.


OBD-2: Ceiling diffusers - square and rectangular multipattern (CMP Series) and perforated square neck (CP Series) with screwdriver operator. Extruded black anodised Aluminium construction.


OBD-3: Duct mounting - for small branch ducts which require fixed dampening. Has a special operator system which allows adjustment from side of duct. Extruded black anodised Aluminium construction.


Construction is robust, using extruded aluminium, with stainless spring steel friction wire. These dampers are not intended for tight shut off or where frequent adjustment is required.

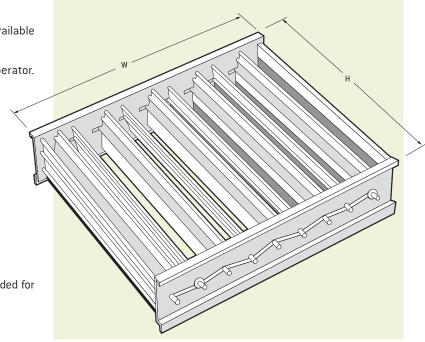

Guide Product Weights	
	Approximate Weight in Kg.
Size	0BD-1
200 x 200	0.40
300 x 300	0.80

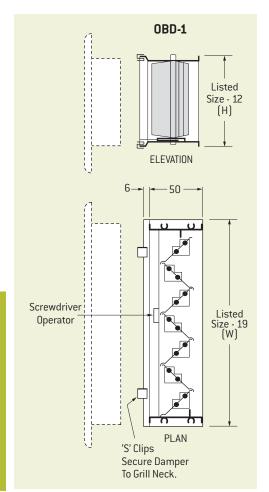

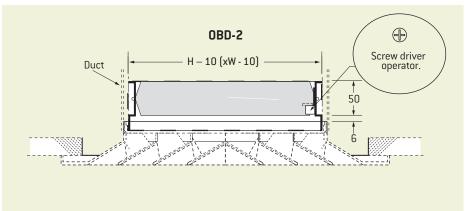

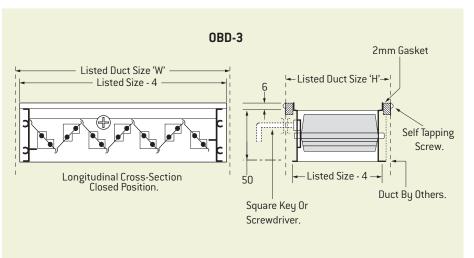

Due to a policy of continuous development and improvement the right is reserved to supply products which may differ slightly from those illustrated and described in this publication.