

ArmstrongFlooring™

Timberline® Plus
Heterogenous Vinyl Sheet

Like a Rock

Timberline® Plus


Heterogenous Vinyl Sheet

Timberline® Plus is a premium, commercially graded vinyl sheet flooring solution that brings the natural beauty of timber to your space, with the added benefits of superior durability and performance. Available in a wide selection of authentic timber look designs, this flooring combines aesthetic appeal with practical functionality, making it a versatile choice for any setting.

At the heart of Timberline® Plus is its advanced construction, which includes a robust 0.7mm wear layer with a UV cured PUR coating. This protective layer not only enhances the longevity of the floor but also reduces both initial and ongoing maintenance efforts. The Aluminum Oxide in the PUR coating further enhances the surface by providing superior resistance to scratches and scuffs, ensuring the floor maintains its pristine appearance even in high-traffic environments.

Thanks to its high performance and resilience, Timberline® Plus is ideally suited for a broad range of applications. It's a perfect flooring solution for residential homes and apartments, providing the warmth of timber without the associated upkeep. Additionally, it meets the demanding requirements of healthcare and aged care facilities, retirement villages, schools, childcare centres, and retail environments, where both durability and ease of maintenance are essential.

Features & Benefits




LOW MAINTENANCE
PUR coating making it easy to clean and maintain



SCRATCH RESISTANT
Family and pet friendly for everyday living




STAIN RESISTANT
For peace of mind for life's mishaps




HYGIENIC SURFACE
Helps prevent mould and bacteria growth




SLIP RESISTANT
Reduce slips to create a safer environment*



HIGHLY DURABLE
Designed for foot traffic offering durability



ULTRA LOW VOC
Ideal for those with allergies and chemical sensitivities



PHTHALATE FREE
Made without phthalates for a healthier environment

*Refer to the Technical Data for slip resistant specifications



Timberline® Plus

Solu

The classic wood look design offers a timeless and elegant appeal to any interior.



Bannockburn P-12 College

Timberline® Plus

Like a Rock

The understated wood tone and colour creates a warm and inviting atmosphere.



Green Leaves Early Learning Centre

Timberline® Plus

Bonafide

The dark timber finish enhances neutral spaces, providing a perfect backdrop for vibrant accents.



Breast Screen Queensland

Timberline® Plus

Colour Palette

Roll size: 2.0mm x 1.83m x 25m



Blanc
Plank size: 625mm x 112.5mm

LRV 44.38



Too Right
Plank size: 625mm x 112.5mm

LRV 25.37



Life is A
Plank size: 325-750mm x 65mm

LRV 34.15



Oiled Plank
Plank size: 575-1250mm x 128mm

LRV 23.16



Obra
Plank size: 1250mm x 90mm

LRV 34.95



Solu
Plank size: 625mm x 112.5mm

LRV 29.01



Blackbutt
Plank size: 1250mm x 180mm

LRV 27.78



Spotted Gum
Plank size: 1250mm x 180mm

LRV 24.78

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only.
It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering online via our [AU website](#) or [NZ website](#).

Timberline® Plus

Colour Palette

Roll size: 2.0mm x 1.83m x 25m



Tasmanian Oak
Plank size: 1250mm x 180mm

LRV 34.74



Hang Ten
Plank size: 325-750mm x 65mm

LRV 24.40



Calde
Plank size: 625mm x 112.5mm

LRV 30.74



Luci
Plank size: 625mm x 112.5mm

LRV 23.05



Solid
Plank size: 1250mm x 180mm

LRV 17.78



Cacao
Plank size: 1250mm x 180mm

LRV 12.46



Stone Grey
Plank size: 1250mm x 180mm

LRV 24.41



Well Versed
Plank size: 575-1250mm x 128mm

LRV 14.52

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only.
It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering online via our [AU website](#) or [NZ website](#).

Timberline® Plus

Colour Palette

Roll size: 2.0mm x 1.83m x 25m



Cowabunga
Plank size: 325-750mm x 65mm

LRV 20.42



Like a Rock
Plank size: 1250mm x 90mm

LRV 18.47



Ash Grey
Plank size: 1250mm x 180mm

LRV 17.08



Bonafide
Plank size: 1250mm x 180mm

LRV 8.33

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only. It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering online via our [AU website](#) or [NZ website](#).



Blanc

Timberline® Plus

Room Visualiser


Flooring is the foundation of any space and an element you want to get right. Our Room Visualiser tool will bring your vision to life and help make the decision-making process easier, all from the convenience of your desktop, mobile or tablet device.

Simply upload a photo of your space or select one of our pre-existing room scenes, and then choose the flooring colour you are interested in. Watch the space transform as you immerse yourself in the various flooring colours and design options.

Start designing today by clicking on your relevant country below.

AUSTRALIA

NEW ZEALAND

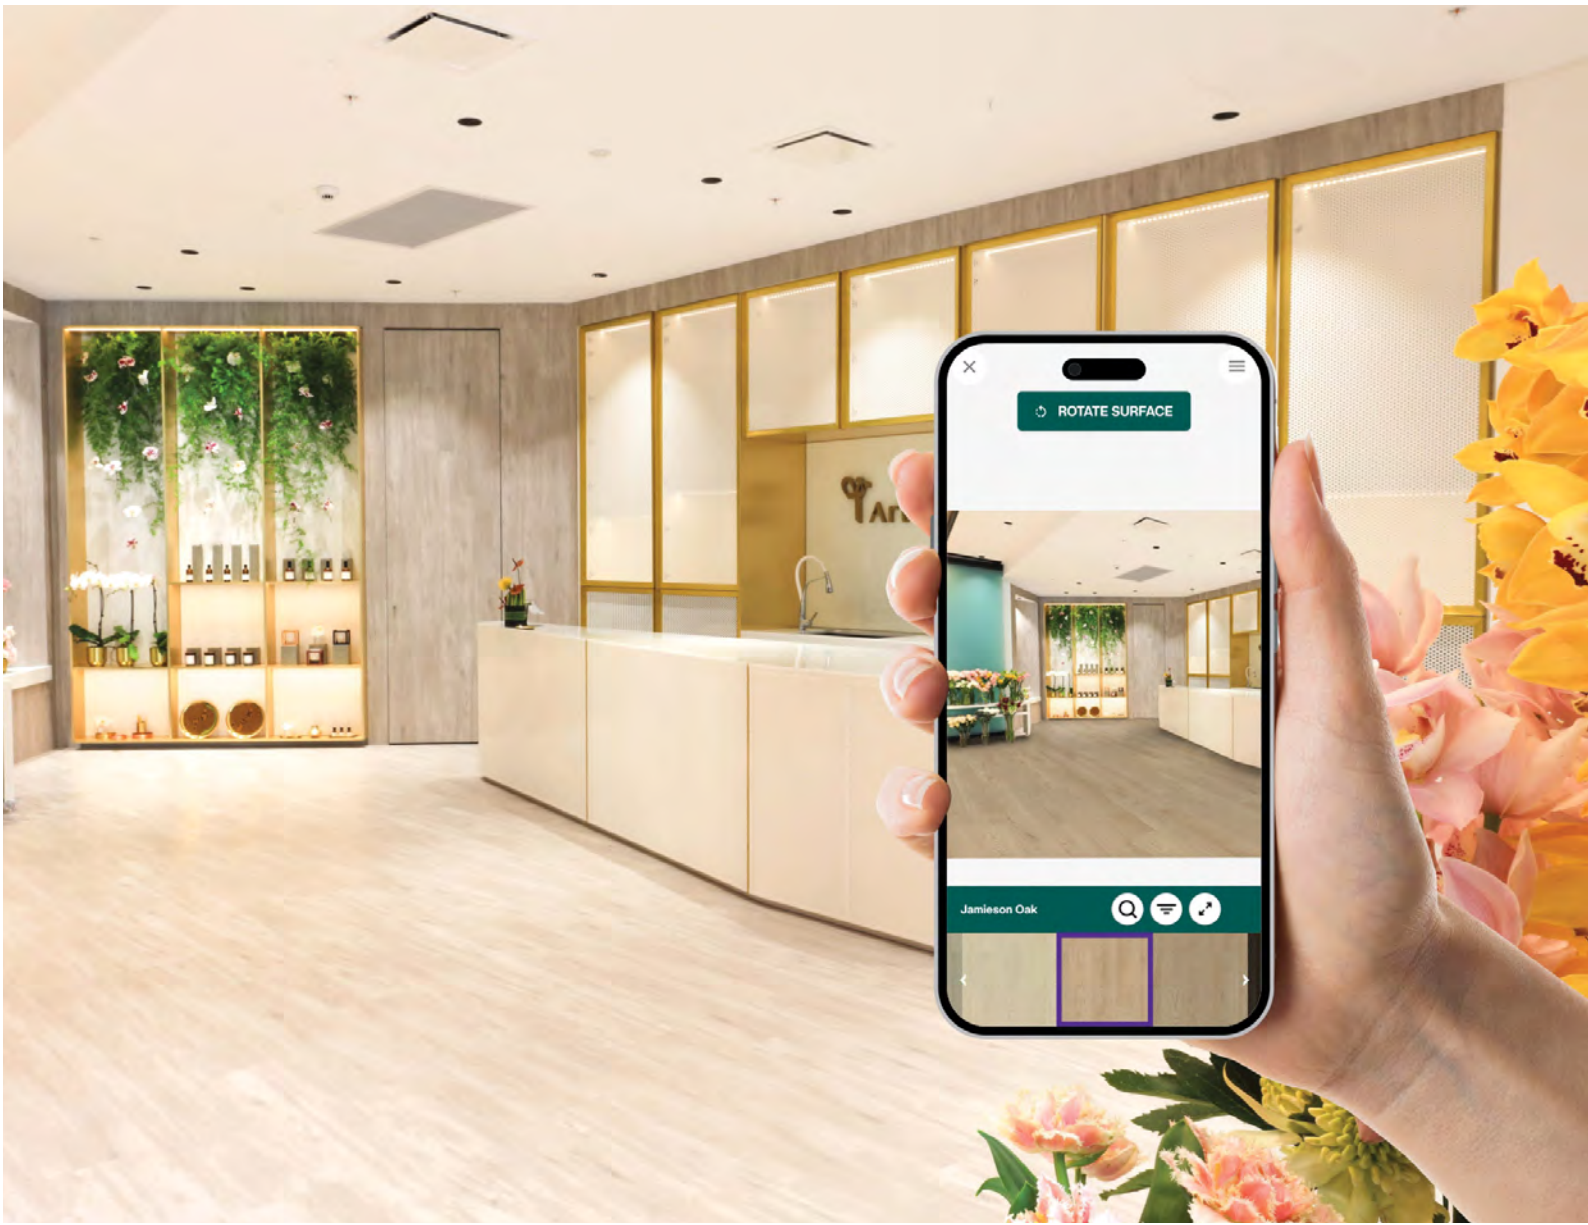

Timberline® Plus

Technical Data

Product Classification		
Type of floor covering	ISO 10582	Heterogeneous sheet vinyl
Wear Class	ISO 10582	Type I
Classification (Use Area)	ISO 10874	Residential: 23 (Heavy) Commercial: 34 (Very Heavy) Light Industrial: 43 (Heavy)
Warranty*	Residential Commercial - available upon request	25 years 15 years
*All warranties are in addition to any rights consumers may have under Australian and New Zealand consumer laws. Terms and conditions apply - for full information in respect to the scope of the commercial warranty, contact your Armstrong Flooring representative.		

Physical Properties		
Polyurethane reinforced	-	PUR + Aluminium Oxide
Colours (Standard)	-	20
Overall thickness	ISO 24346	2.0mm
Wear layer thickness	ISO 24340	0.70mm
Surface texture	-	Embossed
Roll width	ISO 24341	183m
Roll length	ISO 24341	25m
Coverage/roll	-	45.75m ²
Product weight/m ²	ISO 23997	2.78kg/m ²

Installation		
	To current AS/NZS 1884 and Armstrong Flooring Installation Instructions – Heterogeneous Sheet	Full stick, heat weld or seambond seams

Sustainability		
GreenTag GreenRate	-	GreenRate Level A
GreenTag Product Health Declaration	-	Platinum Health
Best Environmental Practice PVC	-	Yes
TVOC Emissions	-	Compliant with Green Building Council low VOC emission rates

Technical Performance		
Slip Resistance	AS 4586 Wet Pendulum (Appendix A) Oil Wet (Appendix D)	P3 R10
Fire Resistance (Floor)	AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate	≥ 4.5kW/m ² ≤ 750%.min
Fire Resistance (Walls)	AS 5637.1 Cone Calorimeter Average specific extinction area	Group 3 > 250m ² /kg
Other		
Colour fastness	ISO 105-B02, Method 3	≥ 6
Residual indentation	ISO 24343-1	≤ 0.1mm (av)
Chemical resistance	-	Good resistance
Flexibility	ISO 24344, Method A	Pass
Castor chair	ISO 4918	Pass
Seam strength	ISO 16906	Pass
Static electrical propensity	EN 1815	Antistatic ≤ 2kV

Accreditation		
Manufactured under accredited ISO 9001 quality, ISO 14001 environmental and ISO 45001 OHS management systems		

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit armstrongflooring.au or armstrongflooring.co.nz
All Armstrong Flooring products must be installed in accordance with the relevant Australian and/or New Zealand applicable standards and the Armstrong Flooring Installation Instructions.
Variations may occur between samples, photographic images, and batches in terms of colour, shade, pattern or similar.

Learn more

www.armstrongflooring.au/timberlineplus



www.armstrongflooring.co.nz/timberlineplus



ArmstrongFlooring™

Australia

29-39 Mills Road, Braeside VIC 3195
1800 632 624
customerservices@armstrongflooring.au
www.armstrongflooring.au

New Zealand

39/332 Great North Road, Grey Lynn, Auckland 1021
0800 449 649
customerservices@armstrongflooring.co.nz
www.armstrongflooring.co.nz