Note: Drain position central unless dimensioned otherwise Level Entry SKU: LQ-LIV-B-LH-LE Step Entry 1,260 o/a SKU: LQ-LIV-B-LH-ST 1,210 o/a 1,195 584.5 584.5 584.5 584.5 16 See Waste Channel 777 To centre line of glazing 777 To centre line of glazing **Recess Specifications** Upstand Upstand Countersunk for size to 2 sides to 2 sides Screw Holes 810 o/a o/a 795 769 Fa 860 Floor Recess 1230x830x30 Glazing Channel Glazing Channel 1,177 1,177
To centre line of glazing 10 To centre line of glazing **Drain Section Edge Section Drain Section Edge Section** 1:80 Slope 1:80 Slope 8mm Toughened Safety Glass Screen Framing _ 8 <u>1</u>8±2 Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens 110|10 ₂|10_|10_| Waterproofing Upstand Upstand on side wall on side wall Factory fitted Countersunk Glazing Channel Screw Holes Floor Level

Note: Verify exact shower base dimensions on site


HR

Hinged Door,

200

457

Screen **Options:**



Floor Level

31

Shower Floor

See Waste Channel Recess

Specifications for depth

information under floor



www.atlantis.co.nz/shop/linea-quattro/liverpool-1200x800/

Recess Level

16

40

Recess

Depth

Shower Floor

See Waste Channel Recess

Specifications for depth

information under floor

For installation instructions go to:

www.atlantis.co.nz/trade/installation/




AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness





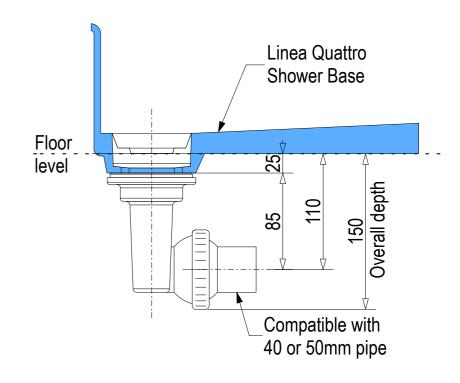

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



