
## Note: Drain position central unless dimensioned otherwise Level Entry SKU: LQ-SEA-LH-LE Step Entry SKU: LQ-SEA-LH-ST 1,800 o/a 1,800 o/a 1,780 10 1,780 10 See Waste Channel **Recess Specifications** Upstand Upstand 484.5 484.5 987 To centre line of glazing 987 To centre line of glazing to 3 sides to 3 sides 1,010 o/a 1,060 o/a Fall Fall Floor Recess 484.5 1800x1040x36 484 Countersunk Glazing Channel Glazing Channel Screw Holes **Drain Section** Drain Section **Edge Section Edge Section** 1:80 Slope 1:80 Slope Floor Floor Floor Level Level Level 8mm Toughened Safety Glass Screen Framing 8 18±2 Factory Fitted 8mm Toughened Safety Glass Screens Glazing Channel Waterproofing 110|10 <sub>2</sub>|10<sub>|</sub>10<sub>|</sub> Flange Upstand Upstand Factory fitted on side wall on side wall Countersunk Glazing Channel Screw Holes \_F<u>loor</u> Level

Note: Verify exact shower base dimensions on site

Screen Options:

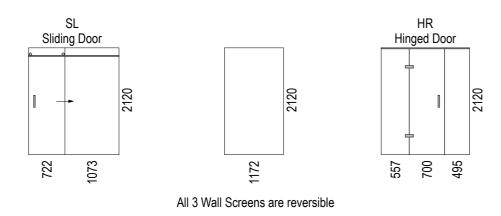

□ 31

Floor Level

Shower Floor

See Waste Channel Recess

Specifications for depth

information under floor

For more product information go to:

See Waste Channel Recess

Specifications for depth

information under floor

Shower Floor

www.atlantis.co.nz/shop/linea-quattro/seattle-1800x1000/

Recess Level Recess

40


Depth


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

## AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



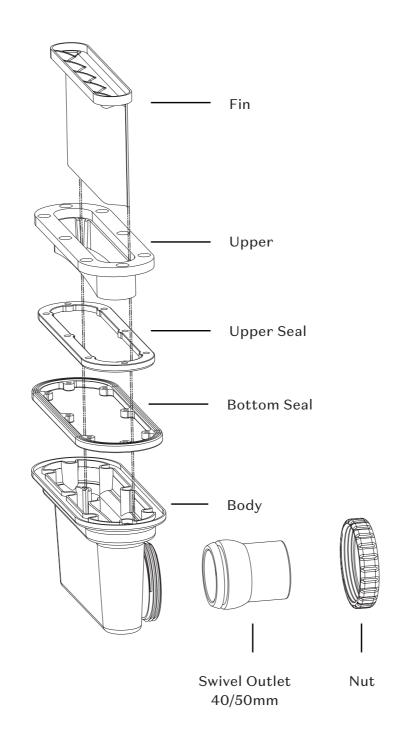

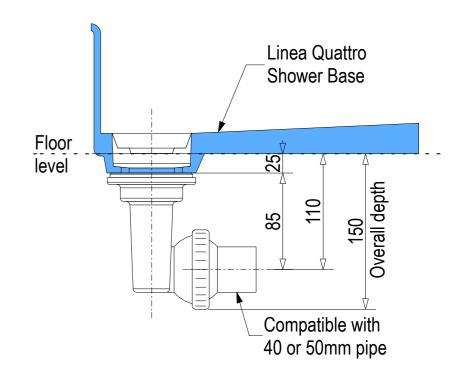

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



