

SD, DD, TLC & MDD

Grille Description Code Examples and Suggested Specifications


SD	L or S	20 or 32	RC	25	OBD-1	– W x H (DUCT)	FINISH
DD	L or S	20 or 32	RC	50			
TLC-SD	L	20	–	CMF			
TLC-DD	L	20	–				
MDD	–	20 or 32	RC (Screw)				

Single Deflection. Double Deflection. Curved Frame, Single Deflection. Curved Frame, Double Deflection. Modular Double Deflection.	Direction of Front Blades, (L - Parallel to long dimension, S - Parallel to short dimension).	Blade Spacing (mm).	Removable Core Frame*.	Optional Frame Styles.	Opposed Blade Damper.	Width x Height Dimensions.	Holyoake White. Mill Aluminium. Powder Coat.
---	---	---------------------------	---------------------------	------------------------------	-----------------------------	-------------------------------	--

All Holyoake sidewall supply registers shall be of extruded aluminium construction, with true airfoil shaped single, or double deflection blades. Optional opposed blade volume control damper, which can be screw driver operated through the face of the grille. All shall be as manufactured by Holyoake.

* = See page 228E (For MDD, see page 210E).

Guide Product Weights	
Description	Approximate Weight in Kg.
MDD	SUBJECT TO CORE ELEMENTS
Contact your local Holyoake Branch	

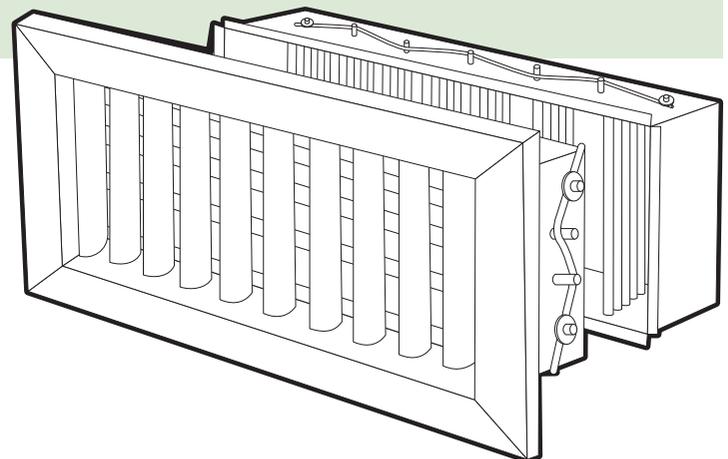

Note
Where appropriate, seismic restraints may be required, but are not supplied.