



Note: Drain position central unless dimensioned otherwise Level Entry SKU: LQ-TOL-B-LH-LE Step Entry SKU: LQ-TOL-B-LH-ST 1,860 o/a 1,810 o/a 1,795 65 884.5 884.5 884.5 884.5 16 See Waste Channel Recess Specifications 877 To centre line of glazing 877 To centre line of glazing for size Upstand Upstand Countersunk 910 o/a 895 869 to 2 sides to 2 sides Screw Holes Fa Fa Floor Recess 1830x930x27 Glazing Channel Glazing Channel 1,777
To centre line of glazing 1,777
To centre line of glazing **Drain Section Edge Section Drain Section Edge Section** 1:80 Slope 1:80 Slope Floor Level 8mm Toughened Safety Glass Screen Framing - Wall Framing __8_<u>1</u>8±2_ Factory Fitted 8mm Toughened Safety Glass Screens Glazing Channel 10 10 Waterproofing Upstand Upstand Flange on side wall on side wall Factory fitted Countersunk Glazing Channel Screw Holes 85 _Floor Level Shower Floor Shower Floor Floor Level Recess Level Recess _16 40 ⊲ 31 Depth See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth Note: Verify exact shower base dimensions on site information under floor information under floor

Screen Options:





For more product information go to:


www.atlantis.co.nz/shop/linea-quattro/toledo-1800x900/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



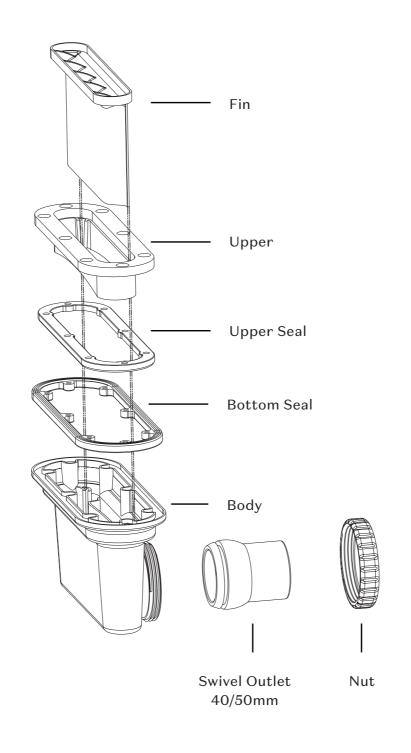

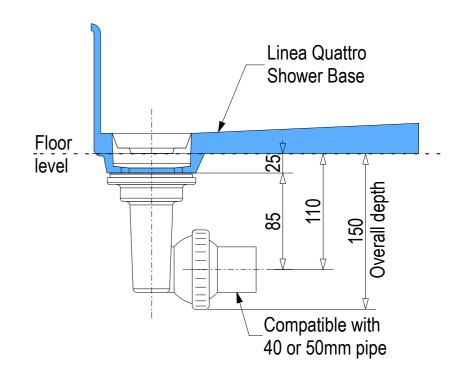

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



