



Juxury Vinyl Flank

Luxury Vinyl Flank

Natural Creations ArborArt® offers an extensive collection of timber inspired flooring designs that blend contemporary style with timeless elegance. From warm, natural tones to cool, modern greys, the diverse colour palette ranges from light to dark, allowing you to create the perfect atmosphere for any space.

Crafted with durability and ease of maintenance in mind, this flooring is an ideal choice for high-traffic areas where performance matters. Its low maintenance surface makes day-to-day cleaning easier, while the realistic wood visuals bring a sense of warmth and sophistication to interiors.

Whether you're designing for residential homes, apartments, retail spaces, educational facilities, retirement villages, or healthcare settings, Natural Creations ArborArt® delivers the beauty of natural timber with the resilience needed for demanding environments.

Features & Benefits



EASY CLEAN

Low maintenance properties make cleaning easier



SCRATCH RESISTANT

Protection so your floors look newer for longer



STAIN RESISTANT

For peace of mind for life's mishaps



HIGHLY DURABLE

Suitable for residential and commercial applications



FAMILY FRIENDLY

Ideal for everyday living so you can enjoy your floors



WATERPROOF SURFACE

Ideal for spill prone areas such as kitchens*



HIGH FOOT TRAFFIC

Designed for foot traffic offering longevity




RESIDENTIAL WARRANTY

25-year residential warranty^ Commercial warranty on request

^{*}Subject to proper installation and care and maintenance as set out in the Armstrong Flooring Installation Instructions and Cleaning and Care Instructions.

^All warranties are in addition to any rights consumers may have under consumer laws. Terms and conditions apply-for ful information in respect to the scope of the residential warranty, please see <u>AU website</u> or <u>NZ website</u> or contact our Head Office. For the commercial warranty, contact your Armstrong Flooring representative.

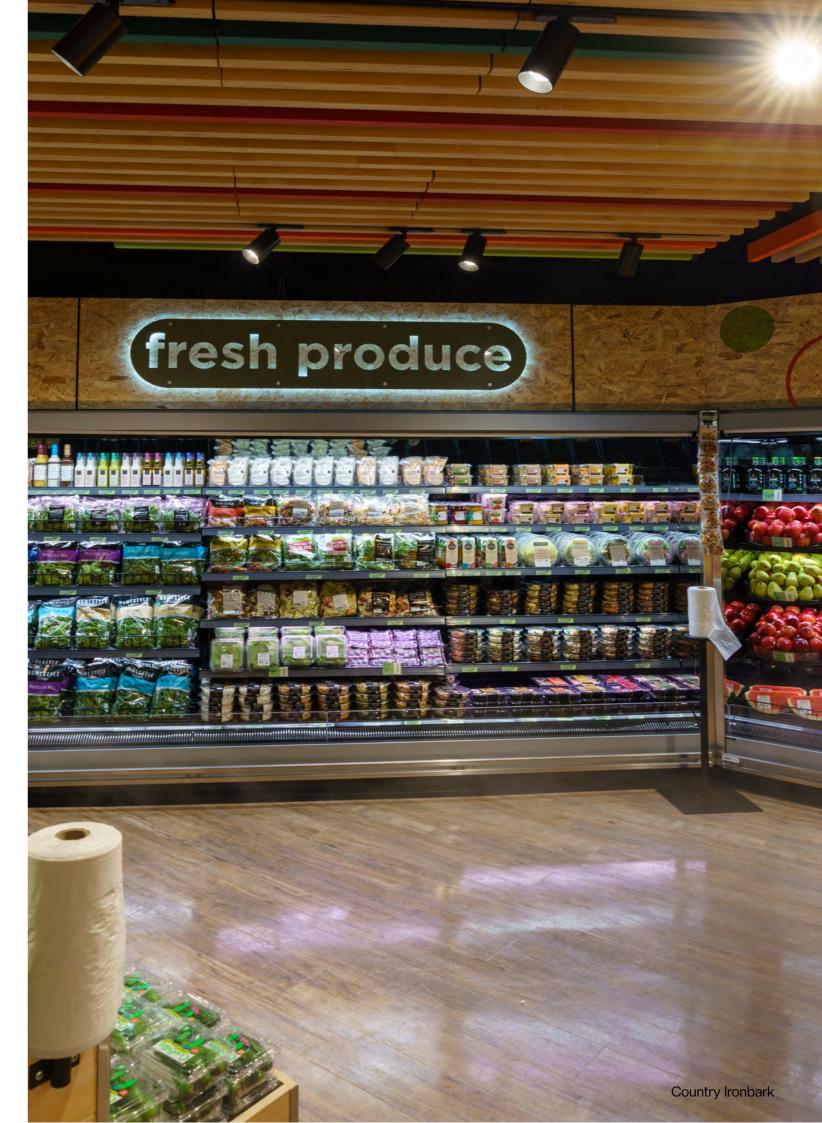









Colour Palette

Plank size: 1500mm x 185mm x 2.5mm (unless noted under the swatch image)









Limed Oak LRV 45.03 Shadow Oak

hadow Oak LRV 32.35

Twilight Tasmanian Oak Strong colour variation

LRV 31.63 Summer Oak









Washed Ebony

LRV 17.18

Plank size: 1219mm x 184mm x 2.5mm

LRV 18.68

Autmn Barnwood

LRV 24.21

Weathered Oak


LRV 19.50

LRV 35.42

Colour Palette

Plank size: 1500mm x 185mm x 2.5mm (unless noted under the swatch image)







LRV 27.83

LRV 19.36

Northern Oak
Plank size: 1219mm x 184mm x 2.5mm

LRV 29.37



Sunset Barnyard Grey



Barnyard Grey
Plank size:1219mm x 229mm x 2.5mm

LRV 27.69

LRV 23.80



Wildwood Classic LRV 20.28



Amendoim Natural
Plank size: 1219mm x 152mm x 2.5mm



Heritage Oak



Victorian Ash Strong colour variation LRV 20.32

LRV 31.03

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only-refer to our <u>Colour Variation Factsheet</u>. It is recommended you view the actual product in store (full range may not be on display so please check with the store) - visit our <u>AU Store Locator</u> or <u>NZ Store Locator</u>.

Colour Palette

Plank size: 1500mm x 230mm x 5mm (unless noted under the swatch image)









Vintage Timber

LRV 28.51

Weathered Oak LightPlank size: 1219mm x 229mm x 2.5mm

Morning Spotted Gum Strong colour variation

LRV 14.44 Carbon Oak

Oak LRV 6.46





Country Ironbark

LRV 18.95

Sunrise Blackbutt Strong colour variation

LRV 21.90

LRV

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only-refer to our <u>Colour Variation Factsheet</u>. It is recommended you view the actual product in store (full range may not be on display so please check with the store) - visit our <u>AU Store Locator</u> or <u>NZ Store Locator</u>.

Room Visualizer


Flooring is the foundation of any space and an element you want to get right. Our Room Visualiser tool will bring your vision to life and help make the decision-making process easier, all from the convenience of your desktop, mobile or tablet device.

Simply upload a photo of your space or select one of our pre-existing room scenes, and then choose the flooring colour you are interested in. Watch the space transform as you immerse yourself in the various flooring colours and design options.

Start designing today by clicking below.

AUSTRALIA

NEW ZEALAND

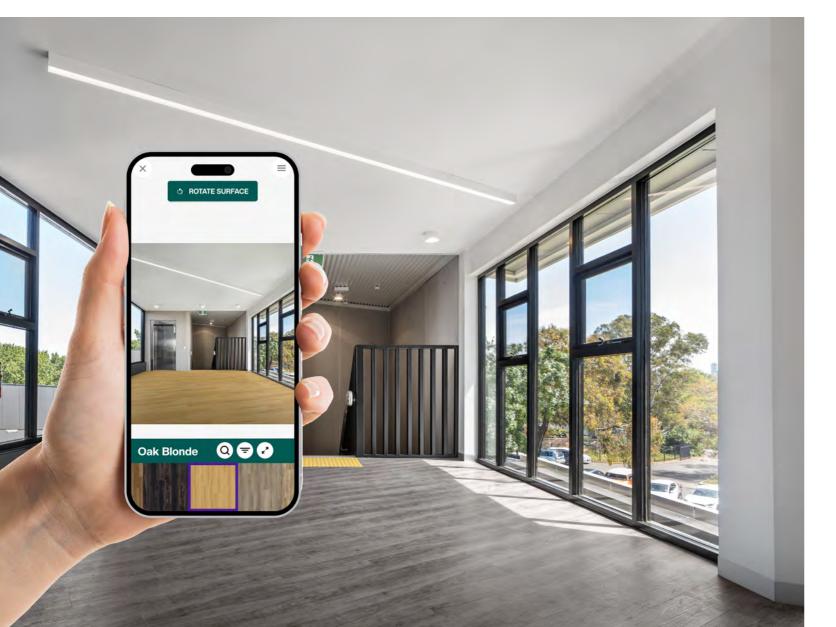

Natural Creations ArborArt®



Product Classification

Type of floor covering	ISO 10582	Luxury Vinyl Plank
Wear Class	ISO 10582	Type I
Classification (Use Area)	ISO 10874	Domestic: 23 (Heavy) Commercial: 33 (Heavy) Light Industrial: 42 (General)
Warranty*	Residential Commercial - available upon request	25 years 15 years

Ill warranties are in addition to any rights consumers may have under Australian and New Zealand consumer laws. Terms and conditions apply - for full information in respect to the scope of the residential warranty, please see mstrongflooring au or armstrongflooring.co.nz or contact our Head Office. For the commercial warranty, contact your Armstrong Flooring representative.

Physical Properties

Surface Treatment		PUR			
Overall thickness (mm)	ISO 24346	2.5			
Wear layer (mm)	ISO 24340	0.55			
Bevel		Yes			
Dimensions (mm)		1500 x 185	1219 x 229	1219 x 184	1219 x 152
Colours (Standard)		16	2	2	2
Tiles/carton		10	12	15	18
m²/carton		2.77	3.34	3.36	3.34
m²/pallet		221.6	267.2	268.8	267.2
kg/carton		12.3	15.0	14.7	14.8

Installation

To current AS/NZS 1884 and Armstrong Flooring Installation Instructions - LVT/P

Sustainability

Global GreenTag	GreenRate Level A
TVOC Emissions	Compliant with Green Building Council low emitting VOC emission rates

Slip Resistance	AS 4586 Wet Pendulum (Appendix A)	P3
Fire Resistance (Floor)	AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate	≥ 4.5kW/m² ≤ 750%.min
Acoustic	ISO 10140-3 & ISO 717-2 Impact sound insulation	Ln,w = 43dB (150mm concrete with 3mm underlay and drop ceiling - 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)
		Ln,w = 57dB (160mm concrete and drop ceiling - no underlay 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)
	ASTM E989-21	
	Impact insulation class	IIC = 67 (I5Dmm concrete with 3mm underlay and drop ceiling - 288mm cavity, 50mm glass wool insulation, 2mm gypsum board)
		IIC = 46 (EGmm concrete and drop ceiling - no underlay 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)
Other		
Colour fastness	ISO 105-B02, Method 3	≥ 6

Accreditation

Manufactured under accredited ISO 9001 quality and ISO 14001 environmental management systems

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit armstrongflooring.au or armstrongflooring.co.nz

All Armstrong Flooring products must be installed in accordance with the relevant Australian and/or New Zealand applicable standards and the Armstrong Flooring Installation Instructions.

Variations may occur between samples, photographic images, and batches in terms of colour shade pattern or similar.



Learn more

www.armstrongflooring.au/arborart



www.armstrongflooring.co.nz/arborart



ArmstrongFlooring

Australia

29-39 Mills Road, Braeside VIC 3195 1800 632 624 customerservices@armstrongflooring.au www.armstrongflooring.au

New Zealand

39/332 Great North Road, Grey Lynn, Auckland 1021 0800 449 649 customerservices@armstrongflooring.co.nz www.armstrongflooring.co.nz