

# DAIRY WATER HEATERS



INSTALL A RHEEM®



STEADY, HOT & STRONG

INSTALL A RHEEM®



# DAIRY WATER HEATERS

BEFORE DESIGNING OUR ELECTRIC **DAIRY WATER HEATERS**, WE SPENT TIME TALKING TO FARMERS – HERE IS WHAT THEY ASKED FOR:

**LARGER CYLINDERS:**

The Rheem Dairy Water Heater is available in 250, 350, 450 and 600-litre delivery capacities.

**EASY-TO-READ WATER TEMPERATURE:**

We positioned a thermometer on the outlet tap for instant and easy temperature reading.

**BETTER WATER CONTROL:**

A Teflon food grade sight glass is fitted to the outside with a graduated measure to give an accurate reading of water volume and/or Heat recovery switching.

**BETTER INLET/OUTLET CONNECTIONS:**

You now have a choice of: gravity fill through the Teflon sight glass or direct inlet connection through an extra fitting on the tap. This fitting can be used as an extra outlet, if required.

**NEW DESIGN, FASTER RECOVERY:**

The water heater comes pre-wired and it is fitted with a 3kW/6kW double bladed element.  
NB: For 6kW usage, 2 separate 15 amp supplies are required.

**GREATER ENERGY EFFICIENCY AND SUSTAINABILITY:**


Rheem Dairy Water Heaters are insulated with 50mm of polyurethane foam, meaning better insulation and efficiency. We also use Solstice zd liquid blowing agent in our foam, which is much better for the environment, having ultra-low Global Warming Potential (GWP) and zero Ozone Depleting Properties (ODP).

**EASY SERVICEABILITY:**

The element access panel is front-facing for easier access.  
NB: Tap not supplied with heater.

**WARRANTY:**

5 year cylinder and 1 year parts and labour.  
For full warranty details, please contact Rheem. All information is current at the time of publication (July 2021), but may change without notice.

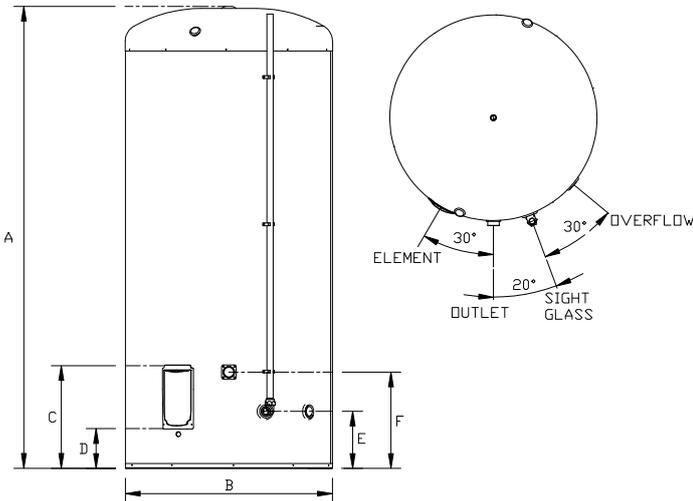

Model	1092501G	1093501G	1094501G	1096001G
<b>Size</b>	250 Litre	350 Litre	450 Litre	600 Litre
<b>Nominal Dimensions (mm)</b>				
<b>A</b>	1234	1533	1838	1885
<b>B</b>	760	760	760	837
<b>C</b>	385	385	385	415
<b>D</b>	125	125	125	155
<b>E</b>	203	203	203	232
<b>F</b>	362	362	362	390
<b>Approx. weight empty (kg)</b>				
	50 kg	60 kg	70 kg	80 kg
<b>Element rating</b>	2 x 3 kW			
<b>Thermostat Max Setting</b>				
	98 °C	98 °C	98 °C	98 °C

**Rheem New Zealand Ltd**

Freephone: 0800 657 336 Freefax 0800 657 337  
Telephone: 09 829 0200  
PO Box 19011, Avondale, Auckland 1746  
www.rheem.co.nz

RHE200.06/21

