

# ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025 and EN 15804+A2 

## STEICO SE STEICOuniversal dry



### Owner of the declaration

STEICO SE  
Otto-Lilienthal-Ring 30  
85622 Feldkirchen  
Germany

### Product

STEICOuniversal dry

### Declared product / Declared unit

1 m<sup>3</sup>

### This declaration is based on Product Category Rules

EN 15804:2012 + A2:2019,  
NPCR Part A:2021 ,  
NPCR 012 Part B for Thermal Insulation  
Products

### Program operator:

EPD Global  
Majorstuen P.O. Box 5250  
N-0303 Oslo  
Norway

### Declaration number

NEPD-11389-11389-2

### Registration number

NEPD-11389-11389-2

### Issue date

08.04.2026

### Valid to

07.04.2031

### EPD Software

Emidat Platform v1.0.0

## General Information

### Product

STEICOuniversal dry

### Program Operator

EPD Global  
Majorstuen P.O. Box 5250  
N-0303 Oslo  
Norway  
Phone: +47 23 08 80 00  
Email: post@epd-norge.no

### Declaration Number

NEPD-11389-11389-2

### This declaration is based on Product Category Rules

EN 15804:2012 + A2:2019,  
NPCR Part A:2021 ,  
NPCR 012 Part B for Thermal Insulation Products

### Statements

The owner of the declaration shall be liable for the underlying information and evidence. The Norwegian EPD Foundation shall not be liable with respect to manufacturer, life cycle assessment data and evidences.

### Declared unit

1 m<sup>3</sup>

### General information on verification of EPD from EPD tools

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD Global's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD Global, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD Global's General Programme Instructions for further information on EPD tools.

### Verification of EPD tool

Charlotte Merlin, FORCE Technology  
(no signature required)

### Owner of the declaration

STEICO SE

### Contact person

sustainability@steico.com

### Phone

0899915510

### Email

sustainability@steico.com

### Manufacturer

STEICO SE  
Otto-Lilienthal-Ring 30  
85622 Feldkirchen, Germany

### Place of production

Various

### Management system

-

### Issue date

08.04.2026

### Valid to

07.04.2031

### Year of study

2024

### Comparability

EPDs of construction products may not be comparable if they do not comply with EN 15804 and are not seen in a building context. EPD data may not be comparable if the datasets used are not developed in accordance with EN 15804 and if the background systems are not based on the same database (including primary and secondary data).

### Development and verification of EPD

The declaration was created using the Emidat EPD tool v1.0, developed by Emidat GmbH. The EPD tool has been approved by EPD Global.

Developer of EPD: Leonhard Garhammer

Reviewer of company-specific input data and EPD: Dr. Michael Makas

### Approved



Håkon Hauan, The Norwegian EPD Foundation

## Product

### Product description

Wood fibres are breathable insulation materials, offering thermal and acoustic insulation. They regulate moisture, provide high heat storage capacity, and contribute to a comfortable indoor climate.

### Application description

STEICO wood fibre insulation materials have a variety of applications, including underlays and rafter-level insulation for roofs, insulation for walls and service zones, and insulation for ceilings and floors. They can also be used for impact sound insulation and for insulating upper floor ceilings. STEICO wood fibre insulation boards can be rendered directly and used as components in external thermal insulation composite systems (ETICS).

### Production process



### Products included in average EPD

The following table shows the products included in this average EPD along with their respective amounts.

Contained product	Place of production	Production share
STEICOuniversal dry	Czarnków, Poland	97.25%
STEICOuniversal dry	Casteljaloux, France	2.75%

### Product specification

Name of ingredient	Share of total weight	Country of origin
Wood	80 - 100 %	Various
Adhesives	2 - 10 %	Various
Polymers	2 - 10 %	Various
Additives	0 - 2 %	Various

### Technical data

	Unit	Value
Mass	kg	210
Thermal conductivity	W / (mK)	0.045

The product is produced according to the harmonized standard EN 13171.

### Market

Poland, France

### Recipients

B2B

## LCA: Calculation rules


### Declared unit

1 m<sup>3</sup>

### Reference service life

Not defined

### System boundary

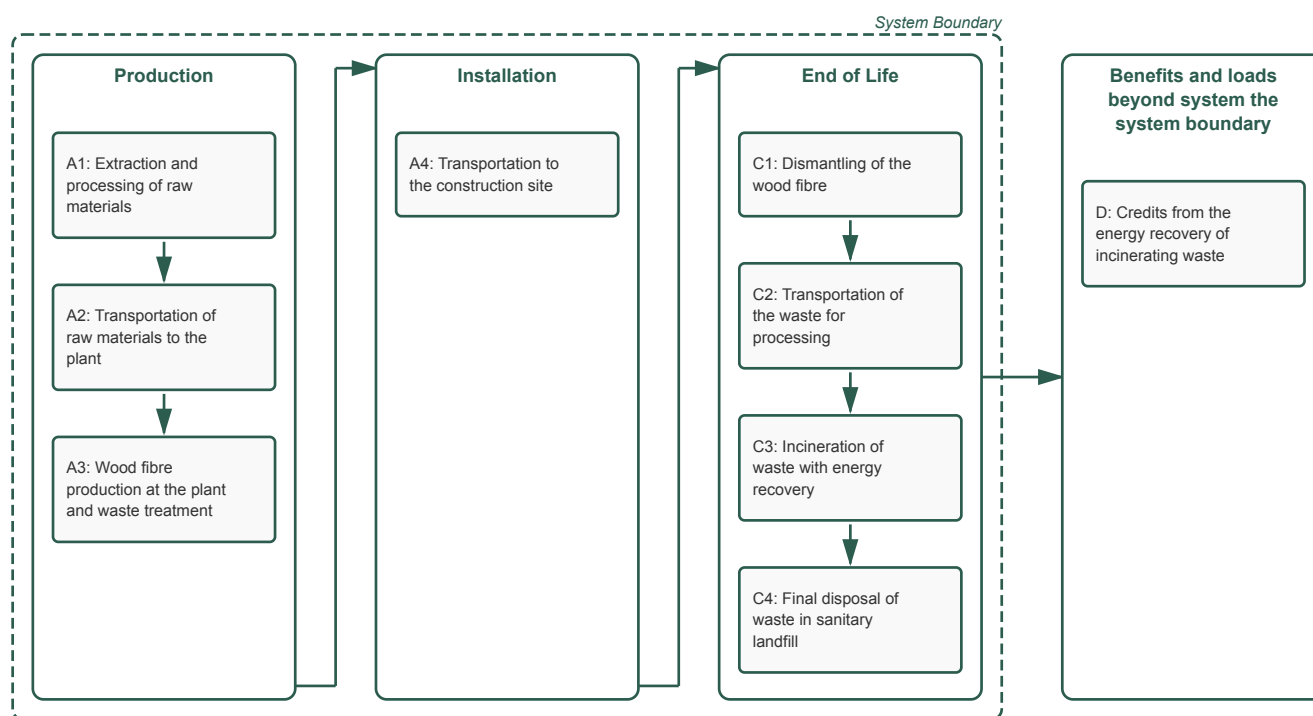

### Data quality

The foreground data are based on extensive and detailed data collection at the production site of the manufacturer, covering key processes such as raw material sourcing, formulation, and manufacturing. These foreground data are fully linked with corresponding datasets from the background database (ecoinvent 3.10) or with EN15804+A2-compliant EPDs, ensuring consistency, reliability, and maintaining alignment with the latest industry standards.

The overall data representativeness is rated as good with an overall score of 4.00/5 (range: 4.00 - 4.00) , in accordance with EN 15804+A2 Annex E guidance on data quality assessment, considering geographical, technical, and temporal representativeness.

The following table discloses all processes or activities assessed with very poor or poor data representativeness according to EN 15804+A2, as well as those assessed as fair that contribute more than 30 % to any core impact indicator in A1–A3:

Element	Minimal Representativeness	Source	Year
Additives	Very poor	ecoinvent 3.10	2023
Chemical	Very poor	ecoinvent 3.10	2023
Adhesives	Poor	ecoinvent 3.10	2023
For grinding	Poor	ecoinvent 3.10	2023
For moulds	Poor	ecoinvent 3.10	2023
For steel	Poor	ecoinvent 3.10	2023

**System boundaries (X=included, MND=module not declared)**

	Production			Installation		Use stage							End-of-Life				Next product system
	Raw material supply	Transport	Manufacturing	Transport	Installation Process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational Water Use	Demolition	Transport	Waste Processing	Disposal	Benefits and loads beyond the system boundary
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	x	x	x	x	MND	MND	MND	MND	MND	MND	MND	MND	x	x	x	x	x
Geography				PL/FR	MND	MND	MND	MND	MND	MND	MND	MND	PL/FR	PL/FR	PL/FR	PL/FR	PL/FR

For the geographies modeled in A1 and A2, refer to *Product specification*.

Type of EPD: Cradle to gate with options, modules C1-C4, and D

**Stage of Material Production and Construction**

Module A1: Extraction and processing of raw materials

Module A2: Transportation of raw materials to the plant

Module A3: Wood fibre production at the plant and waste treatment

Module A4: Transportation to the construction site

Module A5: Includes processes associated with installation of the wood fibre

**Disposal Stage**

Module C1: Dismantling of the wood fibre

Module C2: Transportation of the waste for processing

Module C3: Incineration of waste with energy recovery

Module C4: Final disposal of waste in sanitary landfill

**Credits and burdens outside the system boundaries**

Module D: Credits from the energy recovery of incinerating waste

**Cut-off criteria**

No cut-offs were applied.

**Allocation**

Foreground inventory data (energy and fuels, ancillary materials, emissions and waste) was collected at the production-process level. Using the total output of the production process in 2024, these flows are allocated to the reference product based on mass.

## LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport to the building site (A4)	Value	Unit
Truck: Distance	300.00	km
Transported mass: Product and packaging	224.28	kg
Truck: Energy demand	1.58	MJ / t*km
Truck: Activity	transport, freight, lorry >32 metric ton, EURO6	-
Truck: Fuel consumption	0.98	l / 100km
Truck: Capacity utilization	53.30	%

Transport to the waste facility (C2)	Value	Unit
Mass to incineration	210.00	kg
Distance to incineration	50.00	km
Truck: Activity	transport, freight, lorry >32 metric ton, EURO6	-
Truck: Capacity utilization	53.30	%
Truck: Distance	50.00	km
Truck: Energy demand	1.58	MJ / t*km

Waste processing (C3)	Value	Unit
Material for incineration	210.00	kg

Reuse, recovery and/or recycling potentials (D)	Value	Unit
Substitution of electrical energy production	373.12	MJ
Substitution of thermal energy production	751.24	MJ

Calculation of benefits and loads per EN 15804+A2.

## LCA: Results

The following results are based on the market-based electricity approach applied to the foreground system (A3). Further details on electricity data are provided in the Additional Requirements section.

### Core environmental impact indicators

Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> -eq.	-2.02e+02	6.97e+00	0.00e+00	1.09e+00	3.57e+02	0.00e+00	-1.50e+02
GWP-fossil	kg CO <sub>2</sub> -eq.	1.61e+02	6.97e+00	0.00e+00	1.09e+00	3.27e+00	0.00e+00	-1.49e+02
GWP-biogenic	kg CO <sub>2</sub> -eq.	-3.63e+02	3.50e-03	0.00e+00	5.45e-04	3.54e+02	0.00e+00	-6.10e-01
GWP-luluc	kg CO <sub>2</sub> -eq.	8.43e-01	2.47e-03	0.00e+00	3.86e-04	8.00e-04	0.00e+00	-3.66e-02
ODP	kg CFC-11-Eq	5.90e-06	1.45e-07	0.00e+00	2.27e-08	3.66e-08	0.00e+00	-2.92e-06
AP	mol H <sup>+</sup> -Eq	8.64e-01	1.65e-02	0.00e+00	2.57e-03	3.39e-02	0.00e+00	-6.92e-01
EP-freshwater	kg P-Eq	4.37e-02	4.90e-04	0.00e+00	7.65e-05	1.41e-03	0.00e+00	-1.08e-01
EP-marine	kg N-Eq	2.32e-01	4.32e-03	0.00e+00	6.74e-04	1.80e-02	0.00e+00	-1.09e-01
EP-terrestrial	mol N-Eq	2.46e+00	4.67e-02	0.00e+00	7.28e-03	1.73e-01	0.00e+00	-9.77e-01
POCP	kg NMVOC-Eq	1.01e+00	2.86e-02	0.00e+00	4.46e-03	4.34e-02	0.00e+00	-3.39e-01
ADPE	kg Sb-Eq	1.44e-03	1.99e-05	0.00e+00	3.11e-06	6.68e-06	0.00e+00	-9.39e-05
ADPF	MJ, net calorific value	2.70e+03	1.05e+02	0.00e+00	1.63e+01	2.89e+01	0.00e+00	-2.00e+03
WDP	m <sup>3</sup> world Eq deprived	4.14e+01	5.25e-01	0.00e+00	8.20e-02	6.84e+00	0.00e+00	-2.13e+01

## Core environmental impact indicators

Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
-----------	------	-------	----	----	----	----	----	---

**GWP-total:** Global Warming Potential - total, **GWP-fossil:** Global warming potential - fossil, **GWP-biogenic:** Global Warming Potential - biogenic, **GWP-luluc:** Global Warming Potential - luluc, **ODP:** Depletion potential of the stratospheric ozone layer, **AP:** Acidification potential, Accumulated Exceedance, **EP-freshwater:** Eutrophication potential - freshwater, **EP-marine:** Eutrophication potential - marine, **EP-terrestrial:** Eutrophication potential - terrestrial, **POCP:** Photochemical Ozone Creation Potential, **ADPE:** Abiotic depletion potential - non-fossil resources, **ADPF:** Abiotic depletion potential - fossil resources, **WDP:** Water (user) deprivation potential

## Additional indicators

Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
PM	disease incidence	3.28e-05	6.79e-07	0.00e+00	1.06e-07	3.79e-07	0.00e+00	-1.37e-06
IRP	kBq U235-Eq	8.86e+00	1.27e-01	0.00e+00	1.98e-02	3.33e-02	0.00e+00	-5.02e+00
ETP-fw	CTUe	5.44e+03	2.48e+01	0.00e+00	3.87e+00	3.82e+01	0.00e+00	-3.30e+02
HTP-c	CTUh	8.32e-06	4.46e-08	0.00e+00	6.96e-09	5.92e-08	0.00e+00	-2.10e-07
HTP-nc	CTUh	2.23e-06	6.90e-08	0.00e+00	1.08e-08	4.11e-07	0.00e+00	-1.35e-06
SQP	dimensionless	1.25e+04	1.05e+02	0.00e+00	1.64e+01	8.10e+00	0.00e+00	-2.59e+02

**PM:** Potential incidence of disease due to PM emissions, **IRP:** Potential Human exposure efficiency relative to U235, **ETP-fw:** Potential Comparative Toxic Unit for ecosystems, **HTP-c:** Potential Comparative Toxic Unit for humans - cancer effects, **HTP-nc:** Potential Comparative Toxic Unit for humans - non-cancer effects, **SQP:** Potential Soil quality index. **IRP:** This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator. **ETP-fw, HTP-c, HTP-nc and SQP:** The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with these indicators.

## Use of resources

Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
PERE	MJ	2.82e+03	1.66e+00	0.00e+00	2.59e-01	7.17e-01	0.00e+00	-1.21e+02
PERM	MJ	2.70e+03	0.00e+00	0.00e+00	0.00e+00	-2.70e+03	0.00e+00	0.00e+00
PERT	MJ	5.51e+03	1.66e+00	0.00e+00	2.59e-01	-2.70e+03	0.00e+00	-1.21e+02
PENRE	MJ	2.17e+03	1.05e+02	0.00e+00	1.63e+01	2.89e+01	0.00e+00	-2.00e+03
PENRM	MJ	4.93e+02	0.00e+00	0.00e+00	0.00e+00	-4.93e+02	0.00e+00	0.00e+00
PENRT	MJ	2.67e+03	1.05e+02	0.00e+00	1.63e+01	-4.64e+02	0.00e+00	-2.00e+03
SM	kg	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
RSF	MJ	6.73e+02	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
NRSF	MJ	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
FW	m <sup>3</sup>	1.28e+00	1.52e-02	0.00e+00	2.37e-03	4.21e-02	0.00e+00	-2.77e+00

**PERE:** Primary energy resources - renewable: use as energy carrier, **PERM:** Primary energy resources - renewable: used as raw materials, **PERT:** Primary energy resources - renewable: total, **PENRE:** Primary energy resources - non-renewable: use as energy carrier, **PENRM:** Primary energy resources - non-renewable: used as raw materials, **PENRT:** Primary energy resources - non-renewable: total, **SM:** Use of secondary material, **RSF:** Renewable secondary fuels, **NRSF:** Non-renewable secondary fuels, **FW:** Net use of fresh water

## Waste flows

Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
HWD	kg	3.12e-01	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
NHWD	kg	2.17e+01	0.00e+00	0.00e+00	0.00e+00	2.10e+02	0.00e+00	0.00e+00
RWD	kg	3.92e-05	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00

**HWD:** Hazardous waste disposed, **NHWD:** Non hazardous waste disposed, **RWD:** Radioactive waste disposed

## Output flows

Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
CRU	kg	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
MFR	kg	5.26e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
MER	kg	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00	0.00e+00
EEE	MJ	7.72e+00	0.00e+00	0.00e+00	0.00e+00	3.65e+02	0.00e+00	0.00e+00
EET	MJ	1.62e+01	0.00e+00	0.00e+00	0.00e+00	7.35e+02	0.00e+00	0.00e+00

CRU: Components for re-use , MFR: Materials for recycling , MER: Materials for energy recovery , EEE: Exported electrical energy , EET: Exported thermal energy

Name	Value	Unit
Biogenic carbon content in product	9.64e+01 (range: 9.34e+01 - 9.65e+01)	kg C
Biogenic carbon content in accompanying packaging	7.20e-01 (range: 4.86e-01 - 7.27e-01)	kg C

## Additional requirements

### Greenhouse gas emissions from the use of electricity in the manufacturing phase

Electricity consumption in the manufacturing phase is composed from the sources below. This EPD follows the market-based approach.

Approach	Electricity	Quantity [kWh]	Emission Factor [kg CO <sub>2</sub> e/kWh]	Product
market-based	ecoinvent: electricity production, wind, >3MW turbine, onshore (PL)	74.73	0.03	STEICOuniversal dry
( location-based )	( ecoinvent: market for electricity, high voltage (PL) )	( 74.73 )	( 0.90 )	STEICOuniversal dry
market-based	ecoinvent: electricity, high voltage, residual mix (FR)	81.56	0.19	STEICOuniversal dry
( location-based )	( ecoinvent: market for electricity, high voltage (FR) )	( 81.56 )	( 0.08 )	STEICOuniversal dry

Rows marked with ( ) are provided for reference and not used in the assessment.

### Dangerous substances

The product contains no hazardous substances given by the REACH Candidate List or the Norwegian Priority List.

## Additional environmental information

### Additional environmental impact indicators required in NPCR Part A for construction products

Indicator	Unit	A1-A3	A4	C1	C2	C3	C4	D
GWP-IOBC	kg CO <sub>2</sub> -eq.	1.62e+02	6.97e+00	0.00e+00	1.09e+00	3.27e+00	0.00e+00	-1.50e+02

**GWP-IOBC:** Global Warming Potential - Instantaneous oxidation of biogenic carbon

## Bibliography

CEN/TR 15941:2010	Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data
EN 15804:2012+A2:2019	Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
EN 15942:2022-04	Sustainability of construction works - Environmental product declarations - Communication format business-to-business
ISO 14025:2011-10	Environmental labels and declarations - Type III environmental declarations - Principles and procedures
ISO 14040:2021-02	Environmental management - Life cycle assessment - Principles and framework
ISO 14044:2021-02	Environmental management - Life cycle assessment - Requirements and guidelines
EF 3.1	Environmental Footprint (EF) Life Cycle Impact Assessment method - Characterisation Factors version 3.1, European Commission, Joint Research Centre (JRC)
ecoinvent 3.10	ecoinvent, Zurich, Switzerland, database version 3.10
NPCR Part A:2021	Construction products and services, Version 2.0. Issue date: 24.03.2021; validity extended to 24.03.2026.
NPCR 012:2022	Product category rules, Part B: Thermal insulation products, Version 2.0. Issue date: 31.03.2022; validity extended to 30.06.2026.

	<b>Program Operator</b>	Phone	+47 23 08 80 00
	EPD Global P.O. Box 5250 Majorstuen, N-0303 Oslo Norway	Email	post@epd-norge.no
	<b>Publisher</b>	Web	www.epd-global.no
	EPD Global P.O. Box 5250 Majorstuen, N-0303 Oslo Norway	Phone	+47 23 08 80 00
	<b>Owner of the declaration</b>	Email	post@epd-norge.no
	STEICO SE Otto-Lilienthal-Ring 30, 85622 Feldkirchen Germany	Web	www.epd-global.no
	<b>Author of the life cycle assessment</b>	Phone	0899915510
	STEICO SE Otto-Lilienthal-Ring 30, 85622 Feldkirchen Germany	Email	sustainability@steico.com
	ECO Platform ECO Portal	Web	<a href="http://www.eco-platform.org">www.eco-platform.org</a>
		Web	<a href="#">ECO Portal</a>
	<b>Developer of EPD generator</b>	Phone	+49 176 56 96 77 91
	Emidat GmbH Sandstraße 33, 80335 München Germany	Email	epd@emidat.com
		Web	www.emidat.com