


Step Entry Level Entry SKU: LQ-OTT-LH-ST SKU: LQ-OTT-LH-LE 1,600 o/a 1,600 o/a 1,580 1,580 9 See Waste Channel **Recess Specifications** 434.5 Upstand Upstand 887 To centre line of glazing 887 To centre line of glazing for size to 3 sides to 3 sides 910 o/a 960 o/a _ Fall Fall 895 Floor Recess 434. 1600x940x34 **Glazing Channel Glazing Channel** Countersunk Screw Holes **Drain Section Drain Section Edge Section Edge Section** 1:80 Slope 1:80 Slope Floor Level Floor Level Floor 8mm Toughened Safety Glass Screen - Wall Framing Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens 110|10 Waterproofing 110 10 Upstand Upstand Flange Factory fitted Glazing Channel on side wall on side wall Countersunk Screw Holes _F<u>loor</u> Level Shower Floor Shower Floor Recess Floor Recess Depth Level Level _16 40 _⊲ 31 See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth information under floor information under floor Note: Verify exact shower base dimensions on site

Note: Drain position central unless dimensioned otherwise

Screen Options:

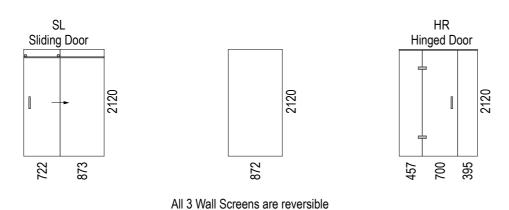

For more product information go to:


www.atlantis.co.nz/shop/linea-quattro/ottawa-1600x900/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



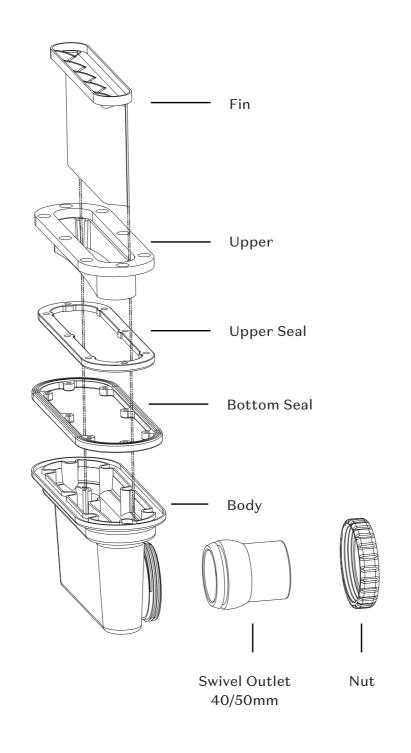

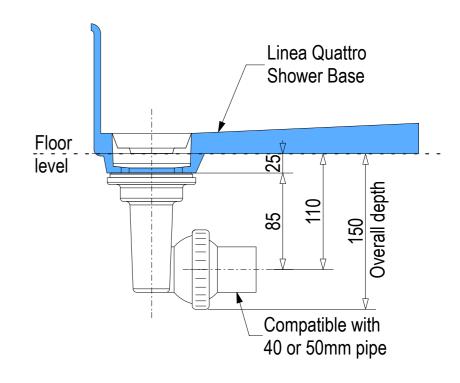

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



