
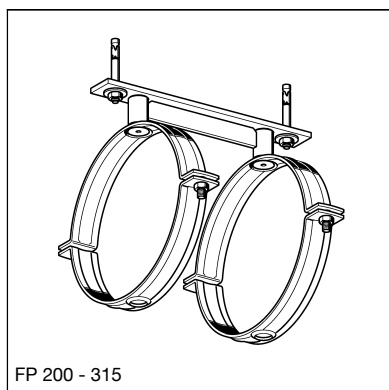


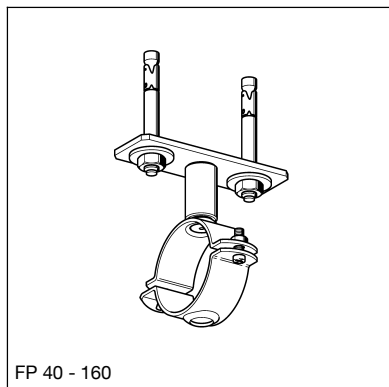

Fixed Point BE w/o Lining

Application

Fixed Point construction for secure absorption of high mechanical loads resulting from Siaqua DSS Systems, being directly fixed to concrete.

Scope of delivery

Pipe Clamp(s) Stabil D-3G without lining, suitable for sizes 40 up to 315 with Mounting Plate provided with single thread connection for sizes 40 up to 160 and double thread connection for sizes 200 up to 315, with two Bolt Anchors M10.

Type	W [kg]	Quantity [pack]	Part number
FP 40 BE o.E.	0.44	1	602500
FP 50 BE o.E.	0.46	1	602510
FP 56 BE o.E.	0.46	1	602520
FP 63 BE o.E.	0.48	1	602530
FP 75 BE o.E.	0.57	1	602540
FP 90 BE o.E.	0.58	1	602550
FP 110 BE o.E.	0.64	1	602560
FP 125 BE o.E.	0.67	1	602570
FP 160 BE o.E.	1.19	1	602580
FP 200 BE o.E.	3.26	1	602810
FP 250 BE o.E.	3.67	1	602820
FP 315 BE o.E.	5.00	1	602830