

Discontinuous horizontal 50x20mm EPS or H3.2 timber battens on a 15° slope and no longer than 100mm as required for fixing.

50mm AAC ENVIRO Panel

Blocking between studs

MASONS AAC render & coating system

H3.2 timber wedge with 15° slope to direct water to outside edge. Masons Barricade PLUS Tape over top adhered to MASONS Barricade Building Wrap

PVC reveal bead flashing adhered to face of meter box. BOSTIK safe seal over and plastered in.

Low expandable foam backing


MASONS Barricade PLUS Tape adhered to MASONS Barricade Building Wrap & meter box

PVC reveal bead flashing adhered to face of meter box. BOSTIK safe seal over and plastered in.

Discontinuous horizontal 50x20mm EPS or H3.2 timber battens on a 15° slope and no longer than 100mm as required for fixing.

MASONS Barricade Building Wrap

MASONS Barricade PLUS Tape to perimeter of Meter Box

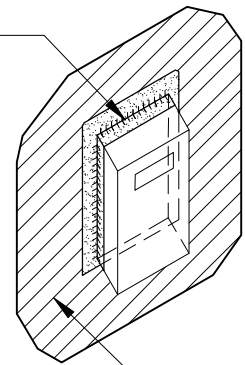

MASONS Barricade Building Wrap

## METER BOX Detail 33 NTS

## METER BOX

## Detail 32 Scale 1:5

### MASONS ENVIRO AAC ON 20mm CAVITY TIMBER FRAME