


Note: Drain position central unless dimensioned otherwise Level Entry SKU: LQ-SEA-RH-LE Step Entry SKU: LQ-SEA-RH-ST 1,800 o/a 1,800 o/a 1,780 1,0 1,780 10 ₫ See Waste Channel **Recess Specifications** 484.5 484.5 Upstand Upstand 987 To centre line of glazing 987 To centre line of glazing to 3 sides to 3 sides 1,010 o/a 1,060 o/a Fall Fall Floor Recess 484.5 484.5 1800x1040x36 Countersunk Glazing Channel Glazing Channel Screw Holes **Drain Section** Drain Section **Edge Section Edge Section** 1:80 Slope 1:80 Slope Floor Floor Floor Level Level Level 8mm Toughened Safety Glass Screen Framing 8 18±2 Factory Fitted 8mm Toughened Safety Glass Screens Glazing Channel Waterproofing 110|10 ₂|10_|10_| Flange Upstand Upstand Factory fitted on side wall on side wall Countersunk Glazing Channel Screw Holes _F<u>loor</u> Level Shower Floor Shower Floor

Note: Verify exact shower base dimensions on site

Screen Options:

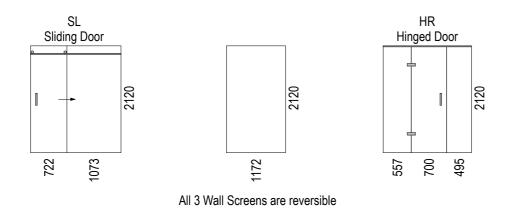

□ 31

Floor Level

See Waste Channel Recess

Specifications for depth

information under floor

For more product information go to:

See Waste Channel Recess

Specifications for depth

information under floor

www.atlantis.co.nz/shop/linea-quattro/seattle-1800x1000/

Recess Level Recess

40


Depth


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



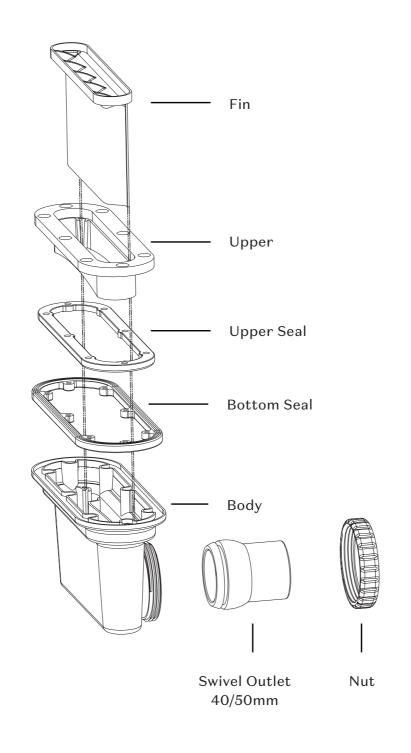

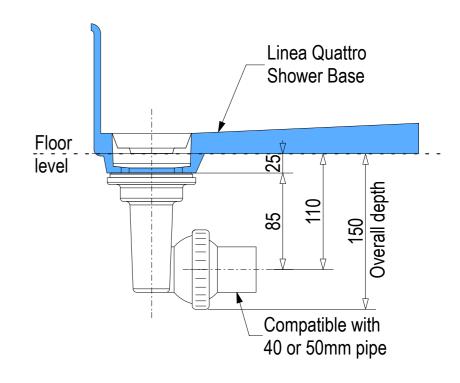

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



