

# ArmstrongFlooring™



**Wallflex®**

*Homogeneous Vinyl Sheet*

Brumby I 6W608339



# Wallflex®


## Homogeneous Vinyl Sheet

Wallflex® is an Australian made vinyl wall covering that offers a refined and versatile design palette to bring a clean, sophisticated aesthetic to any space. Created with simplicity and elegance in mind, this collection is the ideal solution for a wide range of interiors, including high demand environments such as hospitals and healthcare facilities where durability and hygiene are paramount.


Designed to complement our extensive range of flooring collections, Wallflex® provides a seamless wall to floor solution to inhibit mould and bacteria growth for a superior hygienic finish.

Engineered for long-lasting performance, Wallflex® features a robust surface that resists scratches, scuffs, and dents. This not only preserves the wall covering's appearance over time but also ensures a low maintenance solution that is easy to clean, making it particularly suitable for areas where cleanliness and resilience are essential.


## Features & Benefits



**LOW MAINTENANCE**  
PUR coating making it easy to clean and maintain



**WET ROOM**  
Suitable for wet room areas such as showers




**HYGIENIC SURFACE**  
Helps prevent mould and bacteria growth




**SCRATCH RESISTANT**  
Excellent resistant against dent, scratches and scuffs




**STAIN RESISTANT**  
Resistant against stains and discolouration



**CHEMICAL RESISTANT**  
Built for environments exposed to chemicals



**ULTRA LOW VOC**  
Ideal for those with allergies and chemical sensitivities



**PHTHALATE FREE**  
Made without phthalates for a healthier environment





# Wallflex®

## Brumby

This warm, earthy neutral is a versatile colour that adds depth to any space.



*Quarters Primary School*




# Wallflex®

## Cool White

Crisp and bright shade that creates a fresh, clean, and effortless hygienic feel.



Whyalla Secondary College


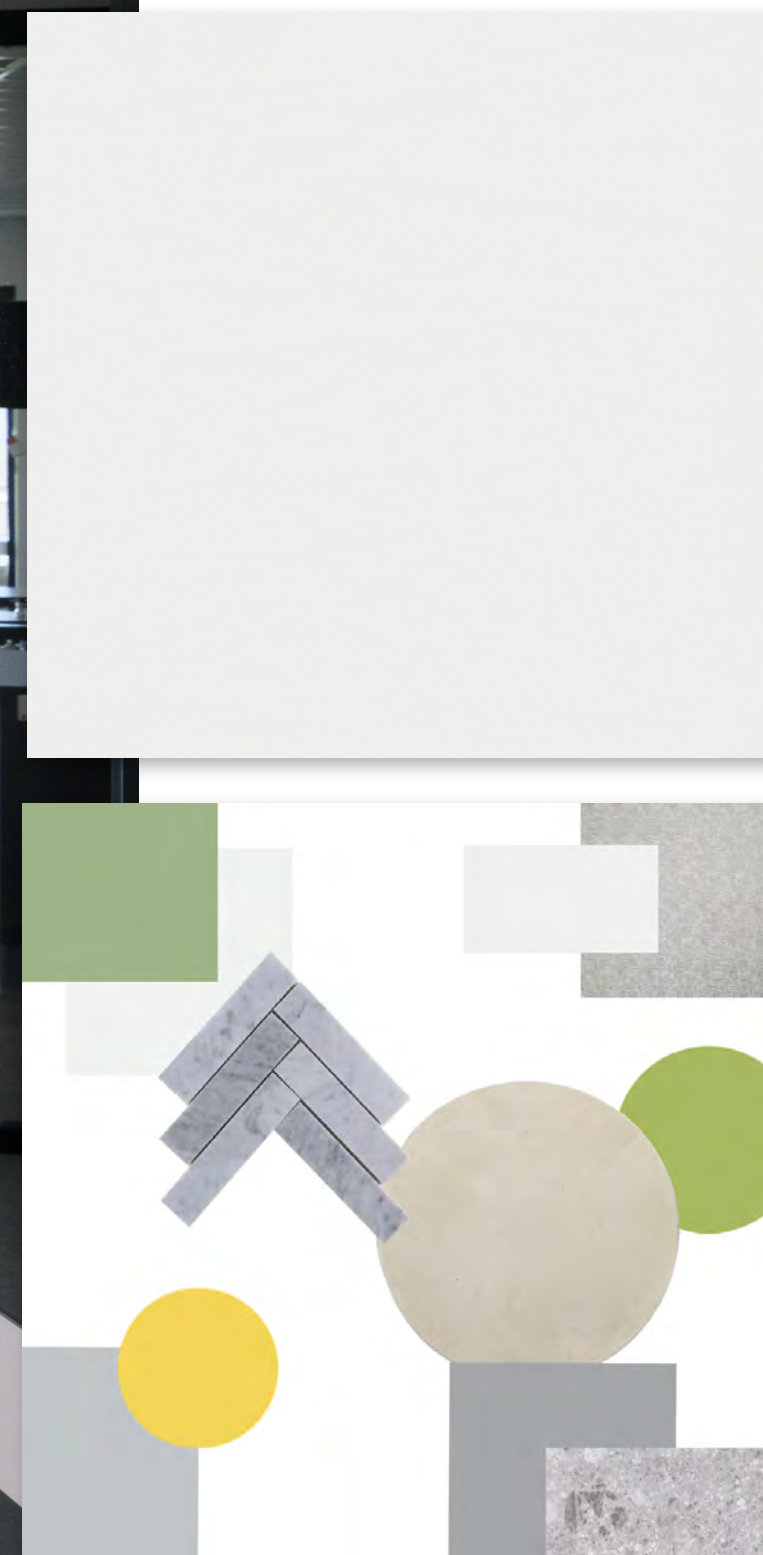




# Wallflex®


## Neutral White

A soft balanced white that exudes simplicity for a clean and serene environment.

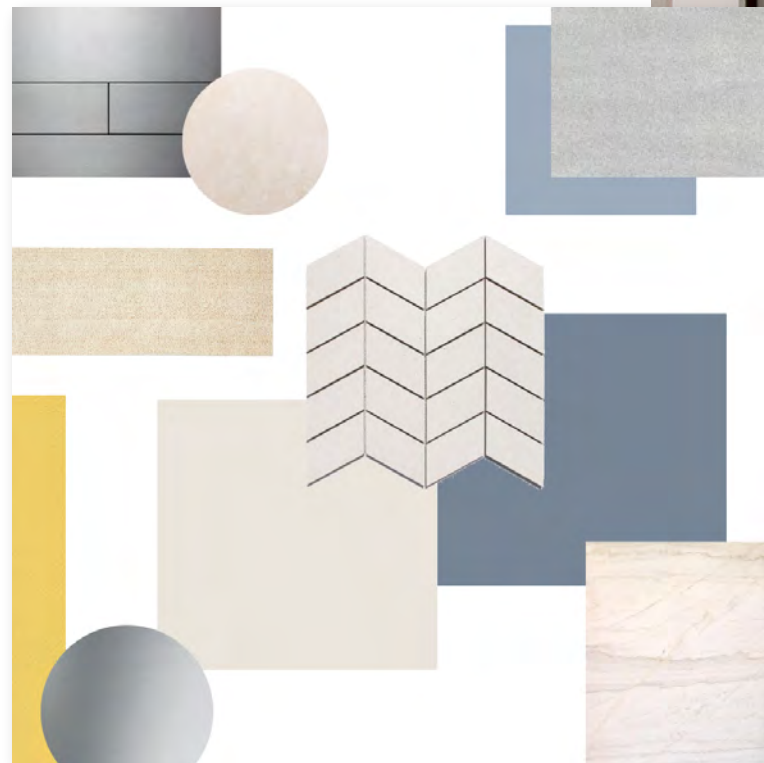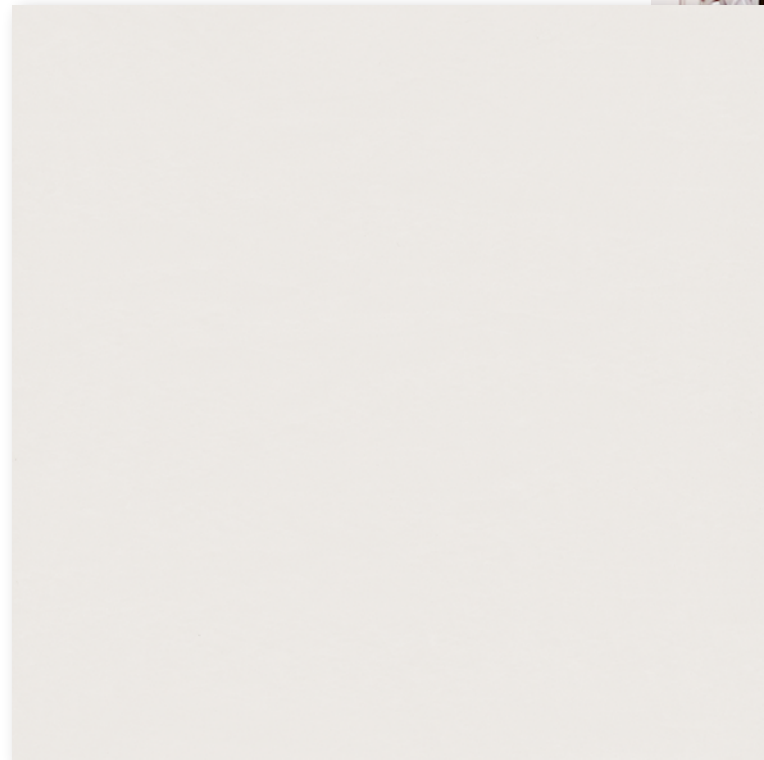

*QLD Bone & Tissues Services*



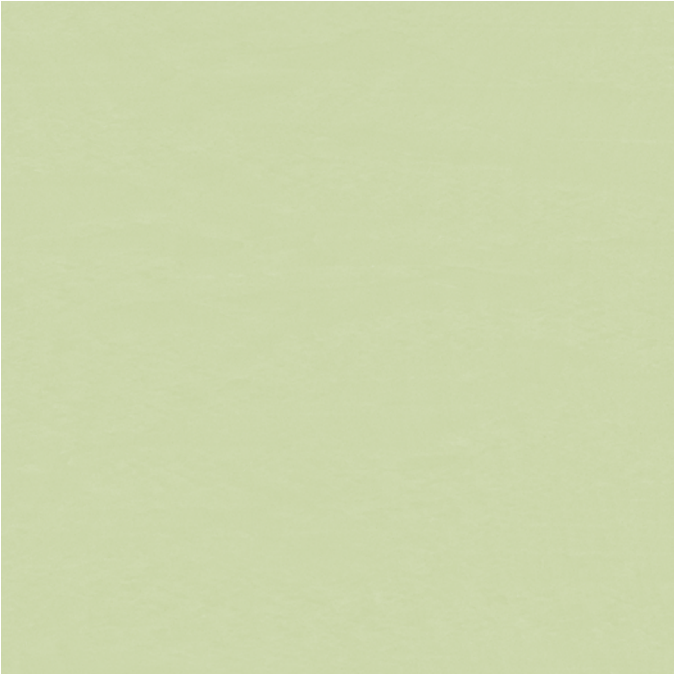

**Stone** | 6W608379

**Brumby** | 6W608339

**Sea Mist** | 6W608349



**Wasabi** | 6W608329

LRV 52.39

LRV 48.62

LRV 59.37

LRV 54.27

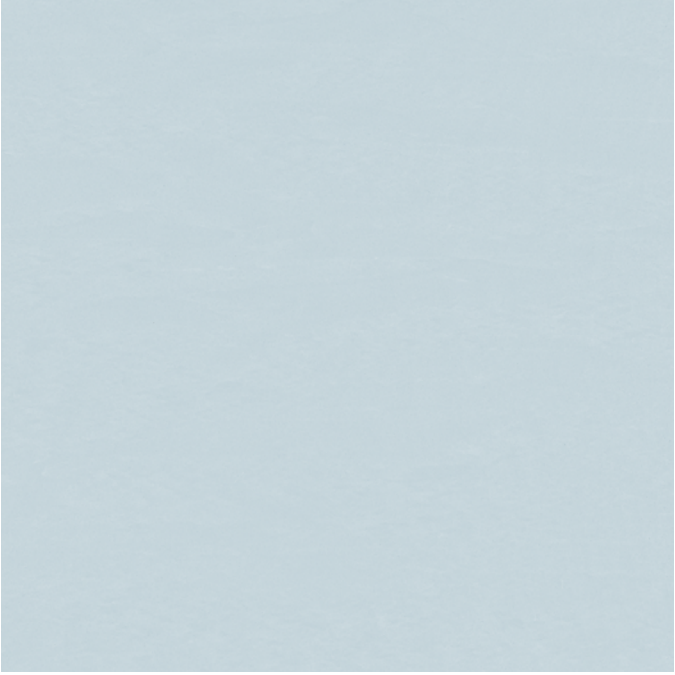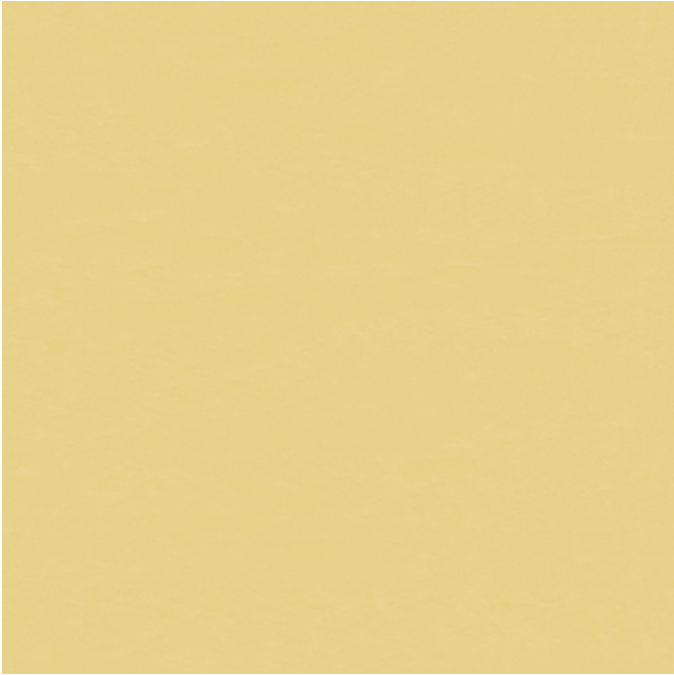

**Dandelion** | 6W608369

**Melon** | 6W608319

**Blue Grey** | 6W608219

**Glacier** | 6W608359

LRV 60.53

LRV 45.98


LRV 61.02

LRV 56.62




# Wallflex®

## Colour Palette

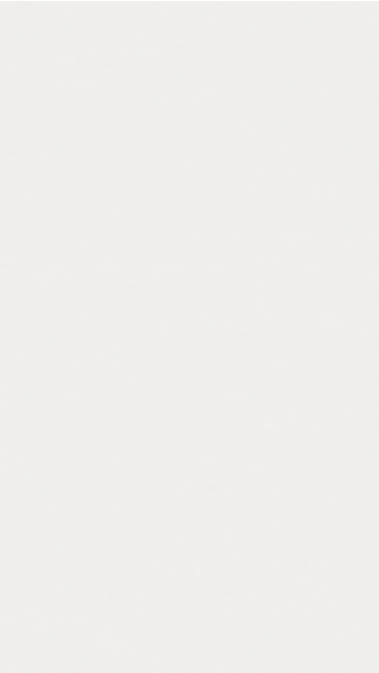


Cool White | 6W608249

LRV 78.89

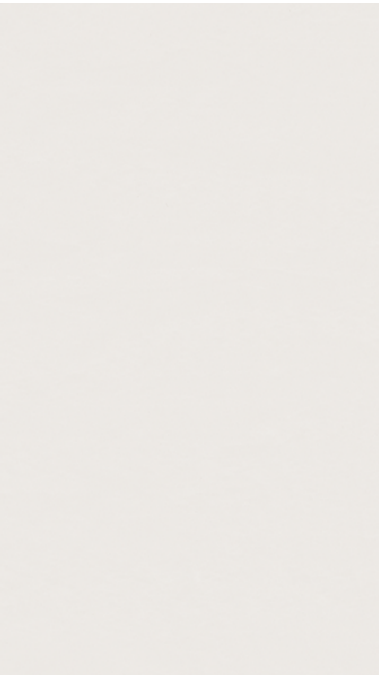

Neutral White | 6W608229

LRV 74.71

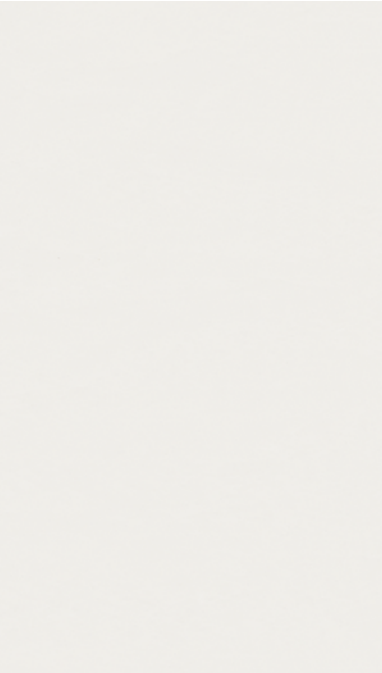

Ice White | 6W608189


LRV 78.54



Mushroom | 6W608269

LRV 64.18

Roll size: 2.0mm x 1.50m x 20m

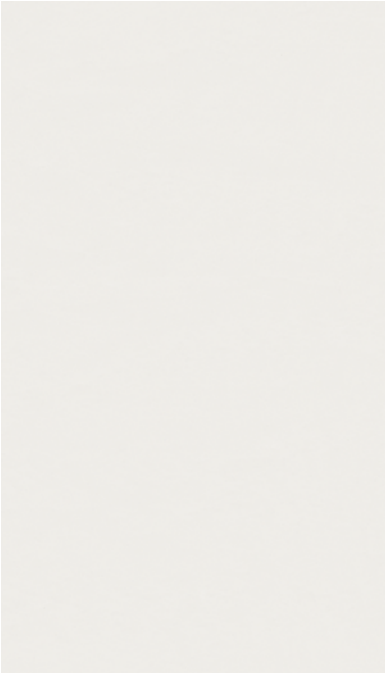

Alabaster | 6W608469

LRV 78.63

# Wallflex®

## Technical Data

Product Classification		
Type of floor covering	EN ISO 10581	Homogeneous sheet vinyl
Binder Content	EN ISO 105814.1	Type II
Classification (Use Area)	ISO 10874	Walling only
Warranty*	Commercial - available upon request	15 years
*All warranties are in addition to any rights consumers may have under Australian and New Zealand consumer laws. Terms and conditions apply - for full information in respect to the scope of the commercial warranty, contact your Armstrong Flooring representative.		

Physical Properties		
Manufactured in	-	Australia
Polyurethane reinforced	-	Yes PUR
Colours (Standard)	-	13
Overall thickness	ISO 24346	2.0mm
Roll width	ISO 24341	1.5m
Roll length	ISO 24341	20m
Coverage/roll	-	30.0m²
Product weight/m²	ISO 23997	3.5kg/m²

Installation		
	To current AS/NZS 1884 and Armstrong Flooring Installation Instructions	Full stick, reverse sheets or heat weld seams

Sustainability		
GreenTag GreenRate	-	GreenRate Level A
GreenTag LCARate	-	LCARate Gold
Environmental Product Declaration	-	Yes
Best Environmental Practice PVC	-	Yes
TVOC Emissions	-	Compliant with Green Building Council low VOC emission rates

Technical Performance		
Fire Resistance (Walls)	AS 5637.1 Cone Calorimeter Average specific extinction area	Group 1 < 250m²/kg
Other		
Colour fastness	ISO 105-B02, Method 3	Pass
Residual indentation	ISO 24343-1	Pass
Chemical resistance	-	Good resistance
Flexibility	ISO 24344, Method A	Pass
Seam strength	ISO 16906	Pass

Accreditation		
Manufactured under accredited ISO 9001 quality, ISO 14001 environmental and ISO 45001 OHS management systems		

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit [armstrongflooring.au](http://armstrongflooring.au) or [armstrongflooring.co.nz](http://armstrongflooring.co.nz)  
All Armstrong Flooring products must be installed in accordance with the relevant Australian and/or New Zealand applicable standards and the Armstrong Flooring Installation Instructions.  
Variations may occur between samples, photographic images, and batches in terms of colour, shade, pattern or similar.


Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only. It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering a sample online via our [AU Website](#) or [NZ Website](#)





**Learn more**

[www.armstrongflooring.au/wallflex](http://www.armstrongflooring.au/wallflex)



[www.armstrongflooring.co.nz/wallflex](http://www.armstrongflooring.co.nz/wallflex)



# **Armstrong**Flooring™

## **Australia**

29-39 Mills Road, Braeside VIC 3195  
1800 632 624  
[customerservices@armstrongflooring.au](mailto:customerservices@armstrongflooring.au)  
[www.armstrongflooring.au](http://www.armstrongflooring.au)

## **New Zealand**

39/332 Great North Road, Grey Lynn, Auckland 1021  
0800 449 649  
[customerservices@armstrongflooring.co.nz](mailto:customerservices@armstrongflooring.co.nz)  
[www.armstrongflooring.co.nz](http://www.armstrongflooring.co.nz)