

DOMINATOR[®]


THE WORLD'S MOST ADVANCED GARAGE DOOR SYSTEMS

GARAGE DOOR SPECIFICATIONS


Dominator[®] Framing Specifications

ROLLER GARAGE DOORS

A-SERIES DOMESTIC

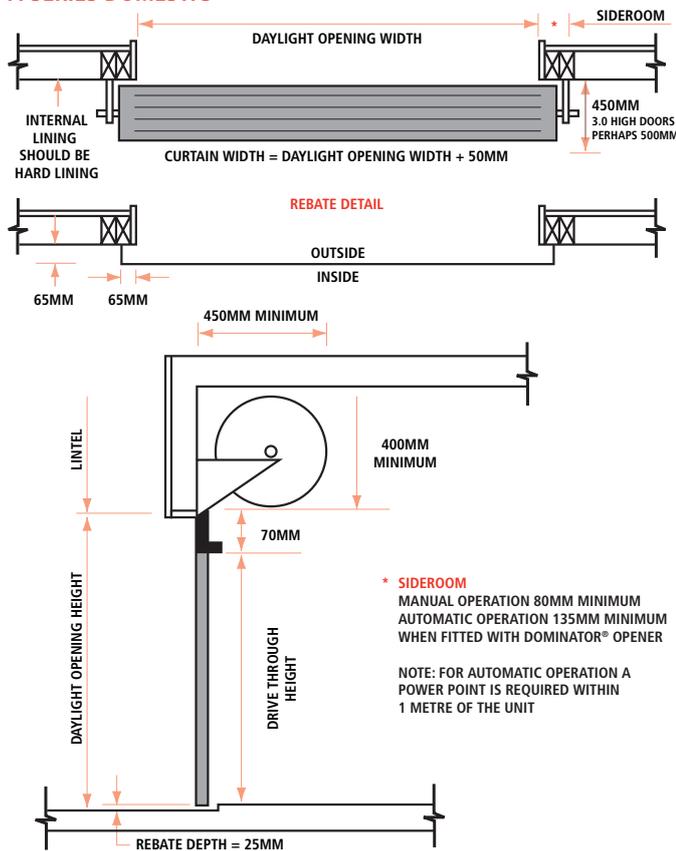

B-SERIES SEMI-COMMERCIAL

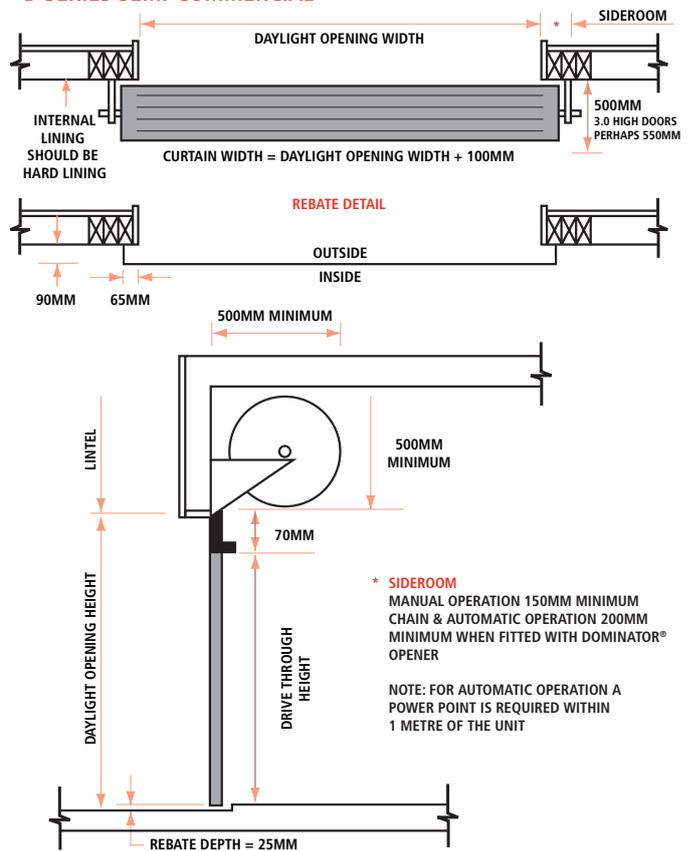



Illustrations are not accurate representations of product, and are for illustrative purposes only. All measurements should be made by your Dominator[®] distributor for clarification.

B&D DOORS (NZ) LTD


67 Wickham Street, P.O. Box 24-131
Linwood, Christchurch 8642, New Zealand
Phone: 0-3 384 5145 Fax: 0-3 384 5148
Freephone: 0800 DOMINATOR (0800 366 462)
Website: www.dominator.co.nz

DISTRIBUTOR:

SECTIONAL GARAGE DOORS

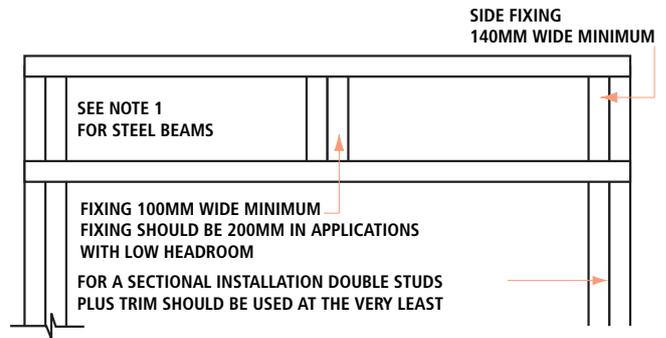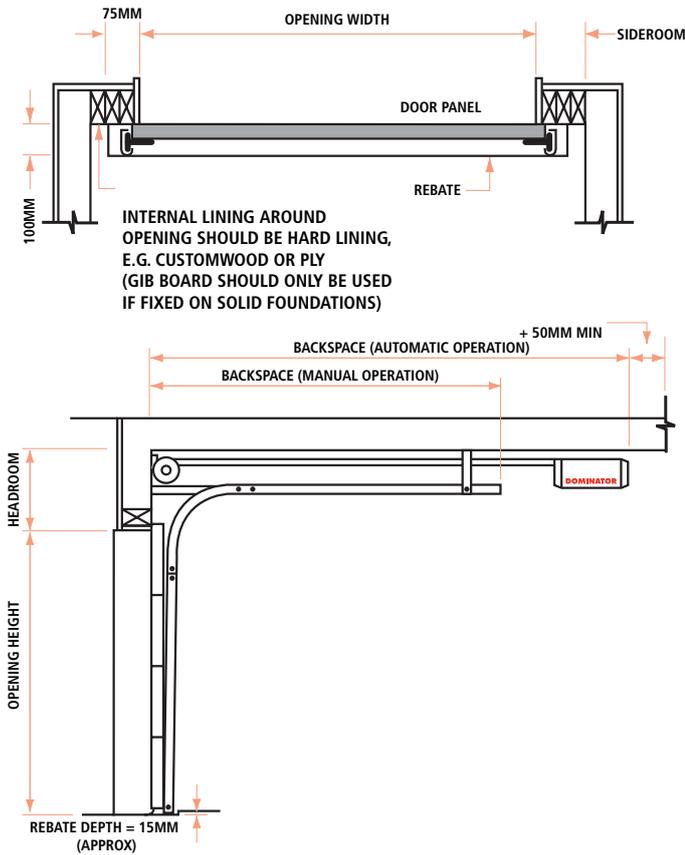


NOGGING DETAIL FOR SECTIONAL UP TO 2.3M HIGH (TRACK AND MOTOR FIXINGS)

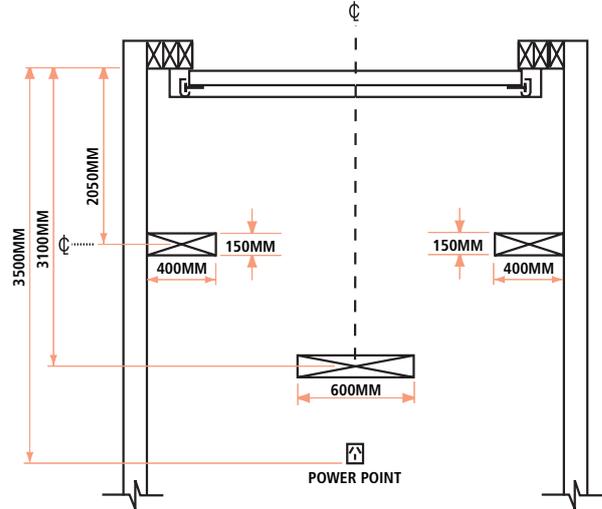


- NOTE:**
1. FOR AUTO OPERATION POWER POINT AND BELL WIRE TO BE FITTED 3.3M BACK FROM CENTRE OF OPENING. BELL WIRE TO BE RUN TO NEAR ACCESS DOOR.
 2. INSIDE SURFACE OF OPENING TO BE FLUSH TO ENABLE DOOR FITTINGS TO BE FIXED CORRECTLY.

NOTE: THE DETAILS SHOWN ARE FOR 2.3M MAXIMUM HEIGHT SECTIONAL DOOR WITH STANDARD 350MM HEADROOM.


REBATE OPTION 1

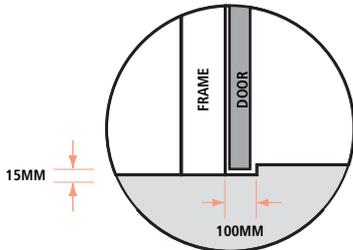

REBATE OPTION 2

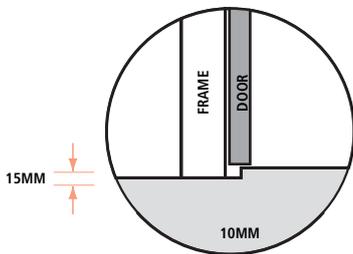

NOTE 1 (ILLUSTRATION)

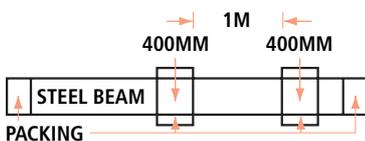

PACKING FOR STEEL BEAMS ('I' OR 'U' SHAPE)

	IMPORTANT DIMENSIONS		BACKSPACE	
	HEADROOM	SIDEROOM	MANUAL OPERATION	* AUTO OPERATION
STD HEADROOM	MANUAL: 320MM AUTO: 350MM	140MM	DOOR HEIGHT + 200MM	DOOR HEIGHTS UP TO 2300MM IS 3500MM BACKSPACE THEN HEIGHT + 1000MM FOR DOORS HIGHER
LOW HEADROOM	AUTO: 200MM	140MM	DOOR HEIGHT + 500MM	

NOTE:

1. WHERE STEEL BEAMS EXIST ABOVE DOOR OPENING, PACK OUT FIXING 400MM WIDE IN CENTRE OF BEAM (ABOVE MIDDLE OF DOOR OPENING SO DOOR HARDWARE CAN BE SECURED). FOR DOOR OPENINGS OVER 3.0 WIDE PACK OUT ADDITIONAL FIXING 400MM WIDE 1 METRE OFF CENTRE (SEE NOTE 1 ILLUSTRATION)
2. ENSURE INSIDE SURFACE OF OPENING IS FLUSH SO DOOR HARDWARE CAN BE FIXED CORRECTLY
3. FOR CONCRETE GARAGES A TIMBER JAMB MUST BE USED FOR DOOR TO OPEN AND CLOSE AGAINST
4. POWER POINT AND BELL WIRE SHOULD BE FITTED APPROXIMATELY 3.5 METERS BACK FROM CENTRE OF OPENING, FOR AUTOMATIC OPERATION

* AN ADDITIONAL 50MM IS REQUIRED BEHIND THE OPERATOR FOR PROGRAMMING PURPOSES

NOTE: CORRECT FRAMING AND LINING MUST BE COMPLETED BEFORE A SECTIONAL DOOR IS INSTALLED ALL AUTOMATIC OPERATION DIMENSIONS APPLY TO 'DOMINATOR' GARAGE DOOR OPENERS ONLY

Dominator® reserves the right to alter specifications at any time without notice in accordance with company policy of continuous product development. Dominator® Garage Doors are sold, installed and serviced by your local authorised Dominator® distributor.

Illustrations are not accurate representations of product, and are for illustrative purposes only. All measurements should be made by your Dominator® distributor for clarification.