

atlantis


Note: Drain position central unless dimensioned otherwise Level Entry SKU: LQ-MIL-B-RH-LE Step Entry 1,260 o/a SKU: LQ-MIL-B-RH-ST 1,210 o/a 1,195 584.5 584.5 584.5 584.5 See Waste Channel 877 To centre line of glazing 877 To centre line of glazing **Recess Specifications** for size Upstand Countersunk Upstand 869 910 o/a 869 895 960 o/a to 2 sides to 2 sides Screw Holes Fall Fall Floor Recess 1230x930x27 Glazing Channel **Glazing Channel** 1,177 10 1,177 To centre line of glazing To centre line of glazing **Drain Section Drain Section Edge Section Edge Section** 1:80 Slope 1:80 Slope 8mm Toughened Safety Glass Screen 8 18±2 Factory Fitted 8mm Toughened Safety **Glazing Channel** Glass Screens 110 10 110|10 Waterproofing Upstand Upstand Flange on side wall on side wall Factory fitted Countersunk Glazing Channel Screw Holes Floor Level Shower Floor Shower Floor Floor Level Recess 8 Recess Level _16 40 Depth _□ 31 ... See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth information under floor information under floor

Note: Verify exact shower base dimensions on site

Screen Options:







For more product information go to:

www.atlantis.co.nz/shop/linea-quattro/milan-1200x900/

For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness





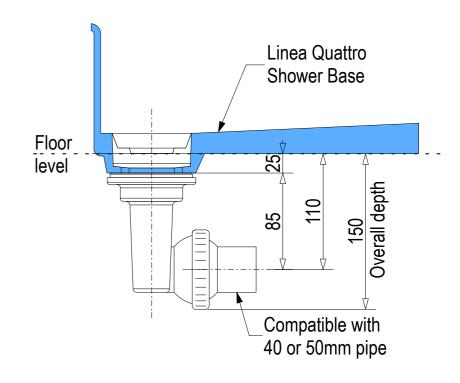

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



