

WAIPORI SATINJET WALL SHOWER ON CONVENTIONAL ARM INSTALLATION GUIDE

TECHNICAL SPECIFICATIONS

Operating Pressure:

Min 35 kPa, Max 500 kPa.


Recommended installation of a pressure limiting valve if supply exceeds 500kPa.

Operating Temperature:

Max 70°C.

NB: New Zealand Building Code Clause G12 - Water Supplies specifies all outlets used primarily for personal hygiene shall deliver water at a safe temperature.

Inlet Connections: All ½" BSP.

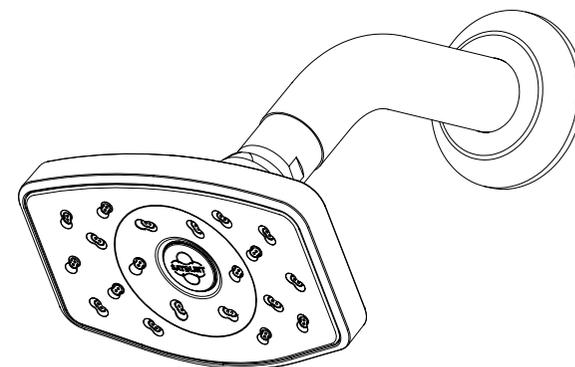

Methven warrants this product against manufacturing defects and that it is suitable for use under the operating conditions specified in this instruction sheet.

For your warranty please refer to www.methven.com or call Customer Service

New Zealand
0800 804 222

Australia
1300 638 483

USA
1800 975 5409


UK
0800 195 1602



WAIPORI


METHVEN

1.

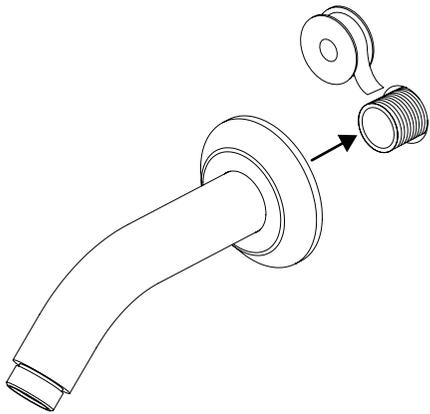


Apply plumbing tape to pipe. Screw arm onto pipe ensuring that the arm ends in the correct position.

2.

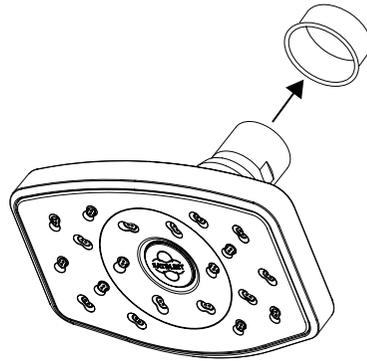


Remove cap from shower head if fitted.

3.

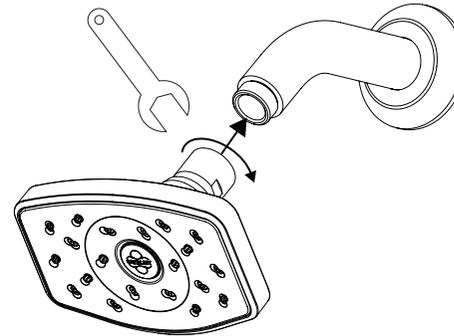

Screw shower head onto arm.

4.

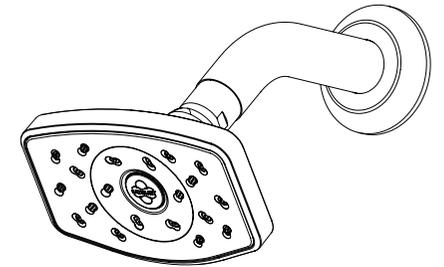

Straighten shower so it is in the correct orientation.

CLEANING

Water contains lime which remains on the surface after the water has evaporated. These lime deposits can be prevented from forming by wiping immediately after use.


To clean the chrome-plated surface use a soft cloth, soap and warm water. Never use cleaning agents that contain a corrosive acid or a scouring additive.



Do not use any sharp objects to clean nozzles



Clean filter washer periodically

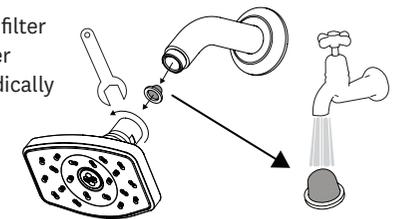

NOTE: Removal of the flow restrictor in the shower rose may be necessary to optimise flow performance in low or unequal pressure systems only.