
Note: Drain position central unless dimensioned otherwise Step Entry Level Entry 1,060 o/a 1,010 o/a SKU: LQ-ATH-RH-LE SKU: LQ-ATH-RH-ST 969 65,16 969 987
To centre line of glazing 987 To centre line of glazing See Waste Channel Upstand Countersunk Upstand **Recess Specifications** to 2 sides 987 To centre line of glazing 484.5 Screw Holes to 2 sides Floor Recess 484.5 987 To centre line of glazing 530 505 1030x1030x30 1,010 o/a 1,060 o/a Fall Fall Glazing Channel Glazing Channel 484.5 530 490 500 510 505 530 530 **Drain Section Edge Section Drain Section Edge Section** 1:80 Slope 1:80 Slope Floor Floor 8mm Toughened Safety Glass Screen 8 18±2 Factory Fitted 8mm Toughened Safety **Glazing Channel** Glass Screens □|10<sub>|</sub>10| 110|10 Waterproofing Upstand Upstand Flange on side wall on side wall Factory fitted 27 Countersunk Glazing Channel Screw Holes Floor Level

Note: Verify exact shower base dimensions on site

Screen **Options:** 



Shower Floor

See Waste Channel Recess

Specifications for depth

information under floor

<u>Floor</u>

Level

<sub>⊲</sub> 31

All Angle Front Screens are reversible

For more product information go to:

See Waste Channel Recess

Specifications for depth

information under floor

Shower Floor

www.atlantis.co.nz/shop/linea-quattro/athens-1000x1000/

Recess Level

16

40

Recess

Depth

For installation instructions go to:

www.atlantis.co.nz/trade/installation/




## AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness





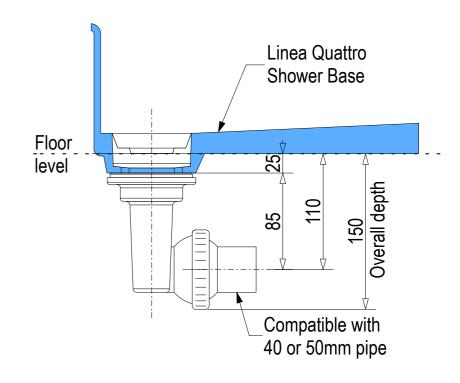

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



