



# Gerard Rockport

## Specific Installation Instructions

Roof pitch	15-90°
Overall length	1330 mm
Length of cover	1250 mm
Width of cover	368 mm
Upstand	20 mm
Roof cover/panel	0.46 m <sup>2</sup>
Coverage	2.2 panel/m <sup>2</sup>
Textured unit weight	3.0 kg

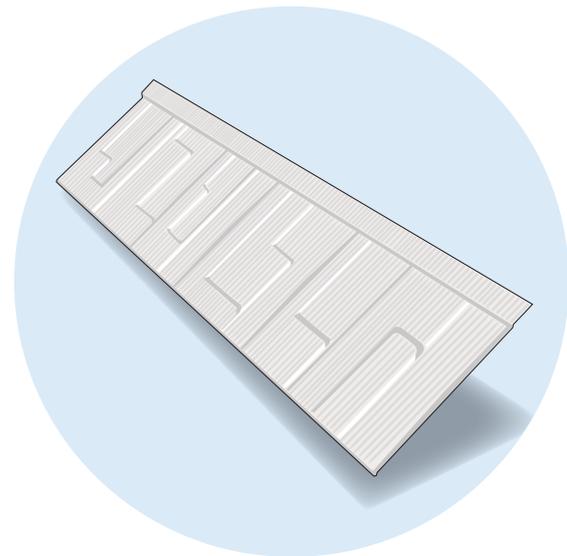


*Dimensions and weights given are nominal.*

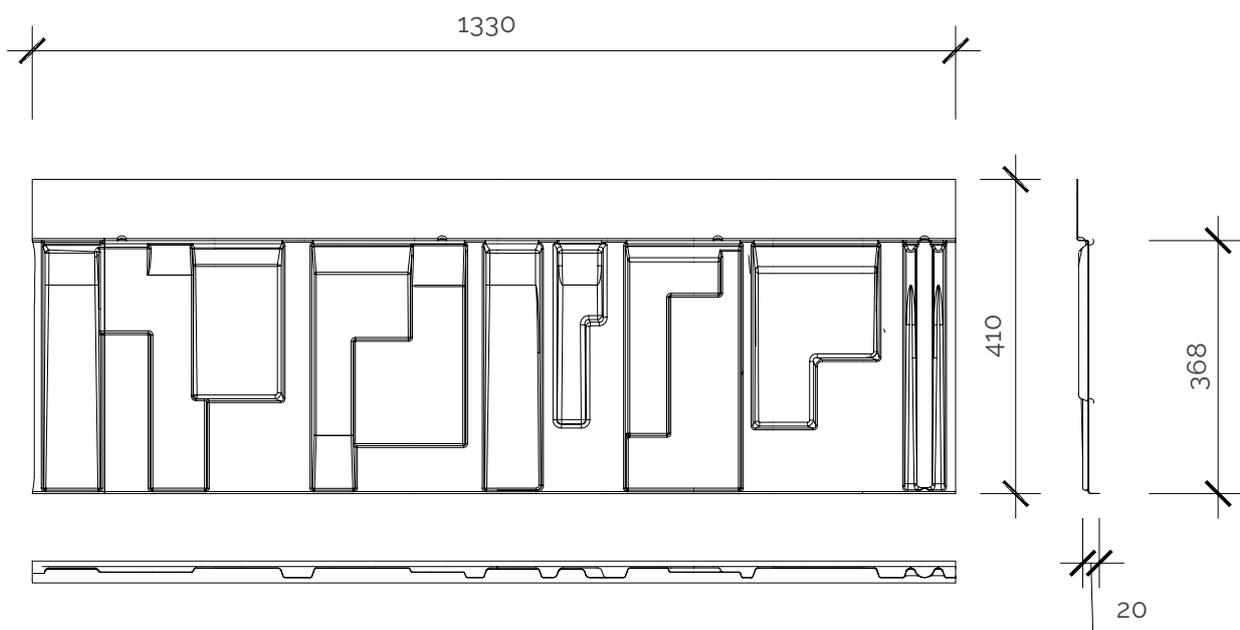

The worry-proof roof.®

# Gerard Rockport Panel Installation – Nailing Position

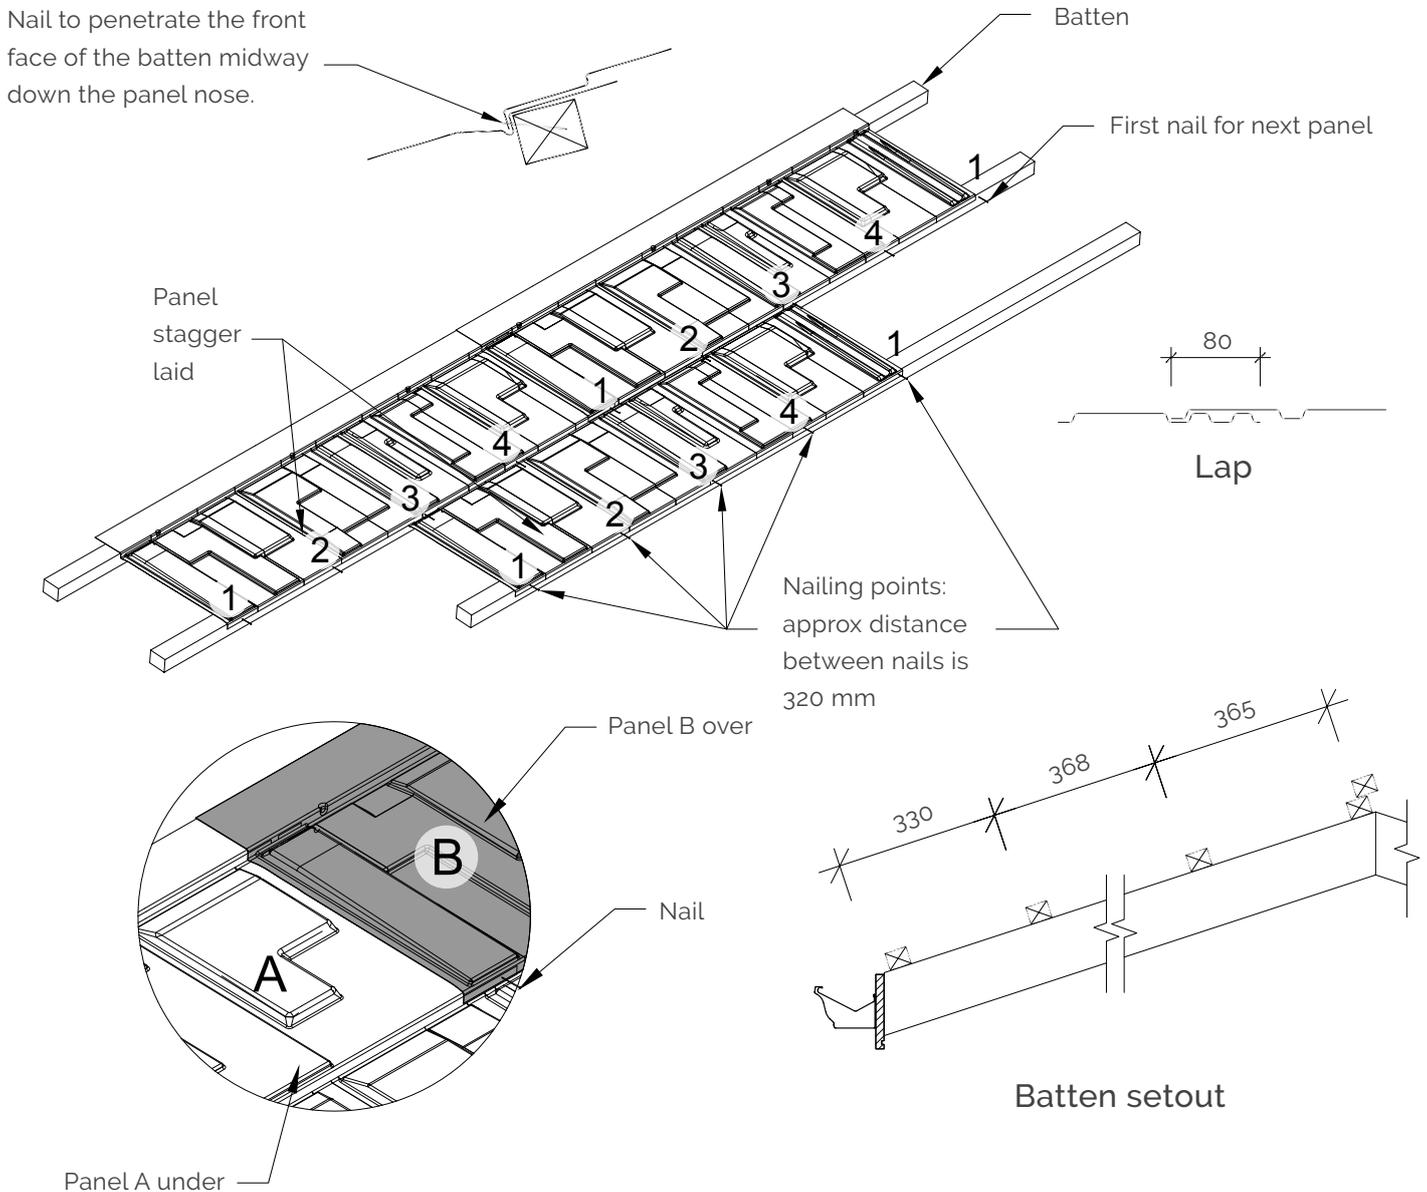

## Fixing

- The nose of each panel is held down at 5 points.
- This comprises 4 nails as per the diagrams plus the nailed overlap panel.

## Fastening panels in Cyclone Areas

- Where a building has been designed outside the scope of NZS 3604. Panels on buildings with a wind load design of above 3.8 kPa should be fastened at approx 160 mm spacing (each module).