# **Armstrong**Flooring



**Quantum**®

Homogeneous Vinyl Sheet

Oxford Grey I 5B504191 Collins Grey I 5B504201

## **Quantum**®

Homogeneous Vinyl Sheet

Quantum® is a high quality Australian made commercial vinyl sheet flooring designed to meet the demands of high traffic environments. Offering a contemporary colour palette, Quantum® is visually appealing to suit a wide variety of spaces. Its embossed surface texture and multi-coloured chip design not only enhances the aesthetic appeal, but also effectively conceals dirt, scuffs, and wear patterns, minimising maintenance needs over time.

Engineered with advanced materials, Quantum® provides outstanding resistance to dents, gouges, and scuffs, making it ideal for areas with high foot traffic and heavy use. It is perfectly suited for demanding settings such as hospitals, healthcare and aged care facilities, educational institutions, hospitality venues, retail spaces, corporate offices, and light industrial environments.

For a customised flooring solution, our Infinity® range uses the Quantum® formulation to develop a bespoke colourway to create a space to work within your design scheme and bring your project to life.

Features & Benefits



**LOW MAINTENANCE** 

PUR coating making it easy to clean and maintain



**HIGH FOOT TRAFFIC** 

Designed to withstand areas with high traffic flow



**HIGHLY DURABLE** 

Superior even wear for a consistent appearance



**HYGIENIC SURFACE** 

Helps prevent mould and bacteria growth



STAIN RESISTANT

Resistant against stains and discolouration




**CHEMICAL RESISTANT** 

Built for environments exposed to chemicals



**LOW VOC** 

Ideal for those with allergies and chemical sensitivities



PHTHALATE FREE

Made without phthalates for a healthier environment





### Oxford Grey & Collins Grey


The light and dark grey flooring creates distinct, defined learning areas and provides a balanced backdrop for accent colours.





Quantum®
Cofour Pafette

Roll size: 2.0mm x 1.83m x 20m

LRV 21.30

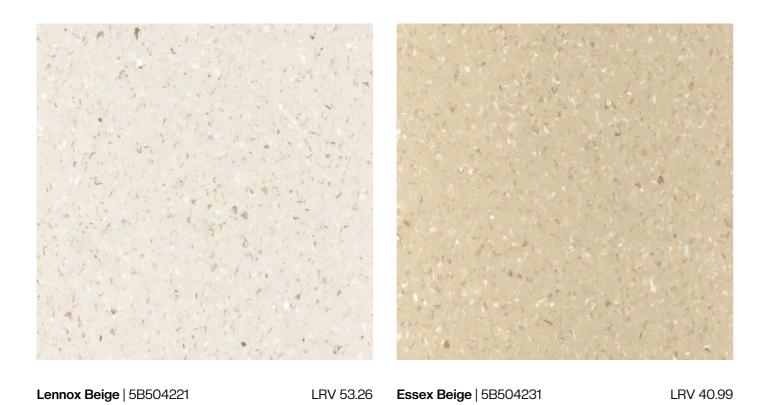


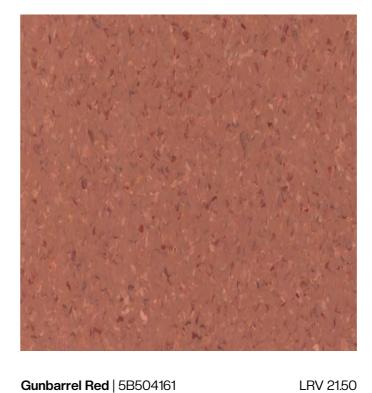

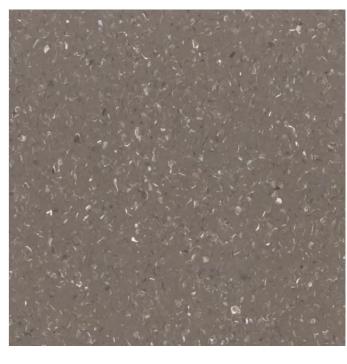

Chapel Brown | 5B504241



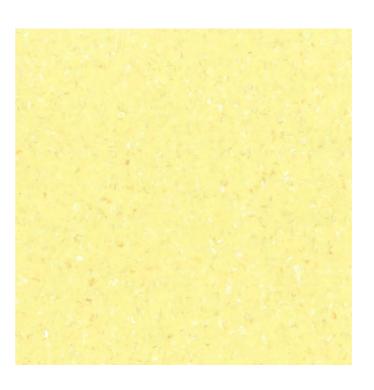

Liverpool Yellow | 5B504251 LRV 64.80 Vermont White | 5B504181 LRV 63.70

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only.

It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering a sample online via our <u>AU Website</u> or <u>NZ Website</u>

College Blue | 5B504281


Burwood Green | 5B504271


Quantum®
Colour Palette

Roll size: 2.0mm x 1.83m x 20m

LRV 35.80

LRV 10.84

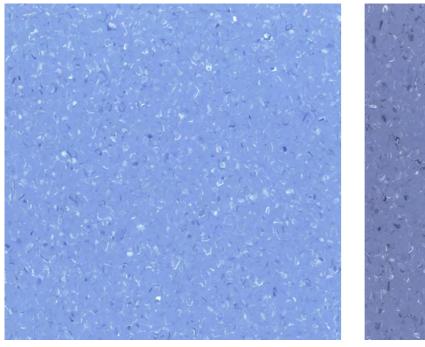

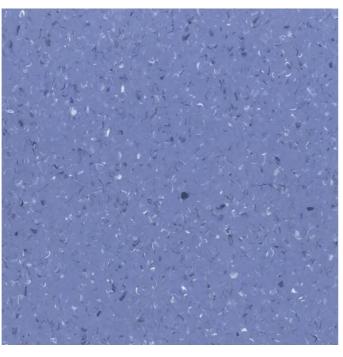

LRV 23.20







Oxford Grey | 5B504191


Pitt Black | 5B504301

LRV 24.42

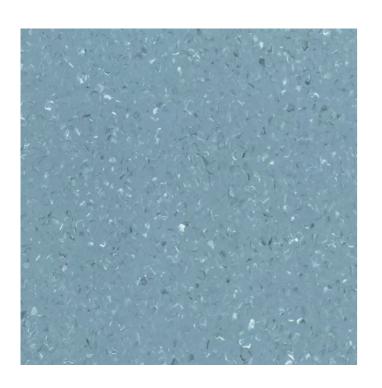

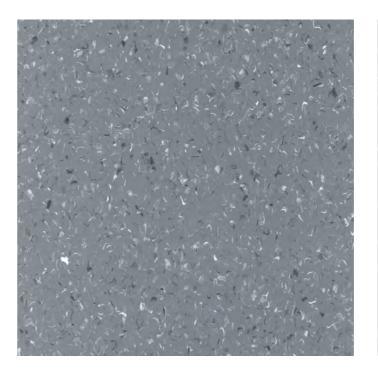

Collins Grey | 5B504201



LRV 29.56

LRV 30.70

Burke Blue | 5B504291

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only.

It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering a sample online via our <u>AU Website</u> or <u>NZ Website</u>

## Quantum® Room Visualiser


Flooring is the foundation of any space and an element you want to get right. Our Room Visualiser tool will bring your vision to life and help make the decision making process easier, all from the convenience of your desktop, mobile or tablet device.

Simply upload a photo of your space or select one of our pre-existing room scenes, and then choose the flooring colour you are interested in. Watch the space transform as you immerse yourself in the various flooring colours and design options.

Start designing today by clicking below.

AUSTRALIA

NEW ZEALAND

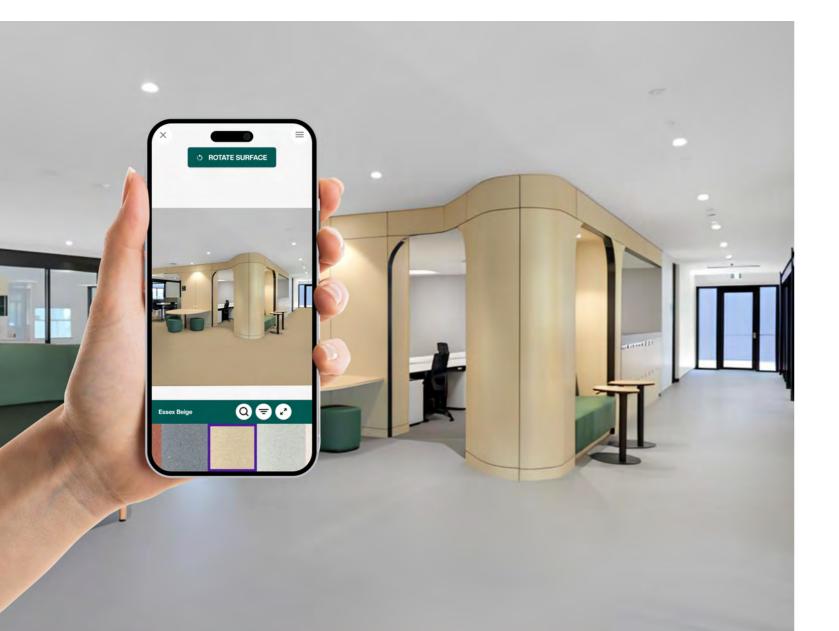



#### **Product Classification**

Type of floor covering	EN ISO 10581	Homogeneous sheet vinyl
Binder Content	EN ISO 10581.4.1	Type I
Classification (Use Area)	ISO 10874	Commercial: 34 (Very Heavy) Light Industrial: 43 (Heavy)
Warranty*	Commercial - available upon request	15 years
*All warranties are in addition to any rights consum	ners may have under Australian and New Zealand consumer laws. Terms and c	onditions apply - for full information in respect to the scope of the commercial warranty

\*All warranties are in addition to any rights consumers may have under Australian and New Zealand consumer laws. Terms and conditions apply - for full information in respect to the scope of the commercial warranty, contact your Armstrong Flooring representative.

#### **Physical Properties**

Manufactured in	_	Australia	
Polyurethane reinforced	<del>-</del>	Yes PUR	
Colours (Standard)	-	13	
Overall thickness	ISO 24346	2.0mm	
Surface texture	-	Lightly embossed	
Roll width	ISO 24341	1.83m	
Roll length	ISO 24341	20m	
Coverage/roll	=	36.6m²	
Product weight/m <sup>2</sup>	ISO 23997	3.0kg/m²	

#### Installation

To current AS/NZS 1884 and	Full stick, reverse sheets, heat
Armstrong Flooring Installation	weld or seambond seams
Instructions - Homogeneous	
Vinyl Sheet Flooring	

#### Sustainability

GreenTag GreenRate	=	GreenRate Level A
Best Environmental Practice PVC	-	Yes
TVOC Emissions	-	Compliant with Green Building Council low VOC emission rates

#### **Technical Performance**

rediffical refrontiance			
Slip Resistance	AS 4586 Wet Pendulum (Appendix A) Oil Wet (Appendix D)	P3 R10	
Fire Resistance (Floor)	AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate	≥ 4.5kW/m² ≤ 750%.min	
Fire Resistance (Walls)	AS 5637.1 Cone Calorimeter Average specific extinction area	Group 3 < 250m²/kg	
Other			
Colour fastness	ISO 105-B02, Method 3	Pass	
Residual indentation	ISO 24343-1	Pass	
Chemical resistance	-	Good resistance	
Flexibility	ISO 24344, Method A	Pass	
Castor chair	ISO 4918	Pass	
Seam strength	ISO 16906	Pass	
Static electrical propensity	EN 1815	Antistatic ≤2kV	

#### Accreditation

Manufactured under accredited ISO 9001 quality, ISO 14001 environmental and ISO 45001 OHS management systems

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit armstrongflooring.au or armstrongflooring.com
All Armstrong Flooring products must be installed in accordance with the relevant Australian and/or New Zealand applicable standards and the Armstrong Flooring Installation Instructions.

Variations may occur between samples, photographic images, and batches in terms of colour, shade, pattern or similar.







### Learn more

www.armstrongflooring.au/quantum



www.armstrongflooring.co.nz/quantum



# **Armstrong**Flooring

#### **Australia**

29-39 Mills Road, Braeside VIC 3195 1800 632 624 customerservices@armstrongflooring.au www.armstrongflooring.au

### **New Zealand**

39/332 Great North Road, Grey Lynn, Auckland 1021 0800 449 649 customerservices@armstrongflooring.co.nz www.armstrongflooring.co.nz