



ArmstrongFlooring™

Kingswood™ 1.2
Hybrid Plank

Latte Oak

Kingswood™ 1.2

Hybrid Plank

Elevate your home with the natural beauty of Kingswood™ 1.2, a thoughtfully curated range of contemporary oaks and hardwoods. Designed with modern living in mind, this stylish flooring brings warmth, texture, and character to any space.

Perfect for busy households, the flooring is scratch and stain resistant, making it an ideal choice for families with children and pets. With its easy-to-clean surface, it takes the stress out of maintenance, so you can spend more time enjoying your home and less time worrying about mess.

A flooring solution designed to grow with you, Kingswood™ 1.2 combines practical performance with timeless appeal ensuring your floors look good year after year.

Features & Benefits



EASY CLEAN

Low maintenance properties make cleaning easier



SCRATCH RESISTANT

Protection so your floors look newer for longer



STAIN RESISTANT

For peace of mind for life's mishaps




ACOUSTIC BENEFITS

Helps absorb noise for a quieter space



HIGHLY DURABLE

Designed for foot traffic and offers longevity



WATERPROOF SURFACE

Ideal for spill prone areas such as kitchens*



A-LITE CORE

20% lighter than standard hybrid products



RESIDENTIAL WARRANTY

15-Year residential warranty^ Commercial warranty on request

*Subject to proper installation and care and maintenance as set out in the Armstrong Flooring Installation Instructions and Cleaning and Care Instructions.

^All warranties are in addition to any rights consumers may have under consumer laws. Terms and conditions apply-for full information in respect to the scope of the residential warranty, please see [AU website](#) or [NZ website](#) or contact our Head Office. For the commercial warranty, contact your Armstrong Flooring representative.




Coffee Oak

Kingswood™ 1.2

Classic Oak

The soft golden hues and grain patterns, create a welcoming foundation to any home interior.

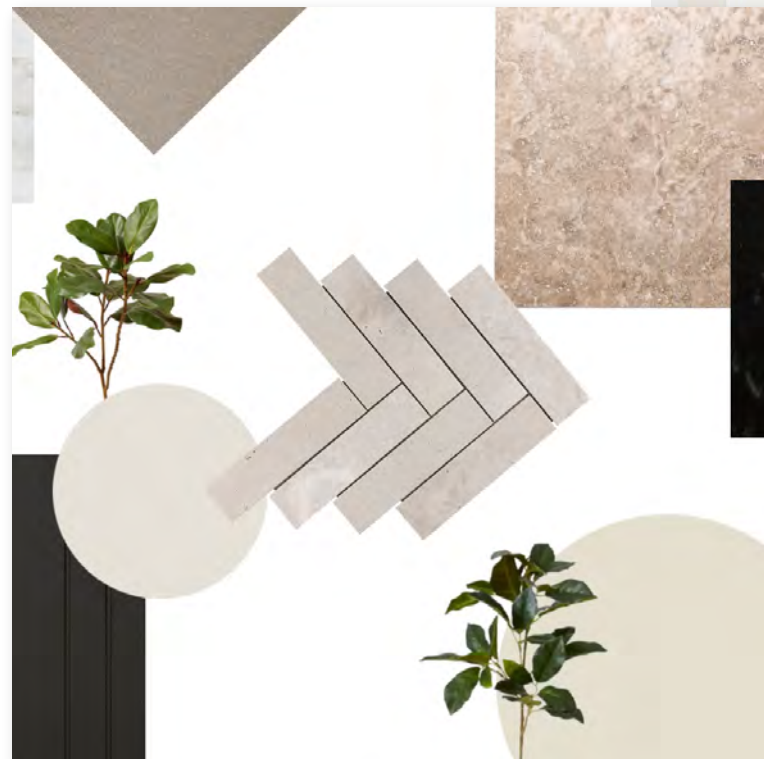

Kingswood™ 1.2

Salted Gum

With its stylish warm muted tones, it brings a sense of relaxed sophistication.



Kingswood™ 1.2

Silver Oak

Blends soft grey tones with subtle oak grain textures for a sleek and airy feel.



Kingswood™ 1.2

Latte Oak

Captures the warmth of the sun combined with neutral tones for a calming space.



Kingswood™ 1.2

Colour Palette

Plank size: 1220mm x 180mm x 6mm



Silver Oak

LRV 38.14

Driftwood Oak

LRV 32.69

Latte Oak

LRV 29.86

Classic Oak

LRV 27.57



Warm Oak

LRV 20.04

Weathered Tasmanian Oak
Strong colour variation

LRV 30.49

Salted Gum
Strong colour variation

LRV 27.09

Sanded Blackbutt
Strong colour variation

LRV 31.71

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only - refer to our [Colour Variation Factsheet](#)
It is recommended you view the actual product in store - visit our [AU Store Locator](#) or [NZ Store Locator](#)

Kingswood™ 1.2

Colour Palette

Plank size: 1220mm x 180mm x 6mm



Tasmanian Hardwood Classic
Strong colour variation

LRV 23.53



Blackbutt Traditional
Strong colour variation

LRV 25.6



Spotted Gum Traditional
Strong colour variation

LRV 14.63



Coffee Oak

LRV 16.81

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only refer to our [Colour Variation Factsheet](#)
It is recommended you view the actual product in store - visit our [AU Store Locator](#) or [NZ Store Locator](#)



Classic Oak



Kingswood™ 1.2

Room Visualiser

Flooring is the foundation of any space and an element you want to get right. Our Room Visualiser tool will bring your vision to life and help make the decision-making process easier, all from the convenience of your desktop, mobile or tablet device.

Simply upload a photo of your space or select one of our pre-existing room scenes, and then choose the flooring colour you are interested in. Watch the space transform as you immerse yourself in the various flooring colours and design options.

Start designing today by clicking on your relevant country below.

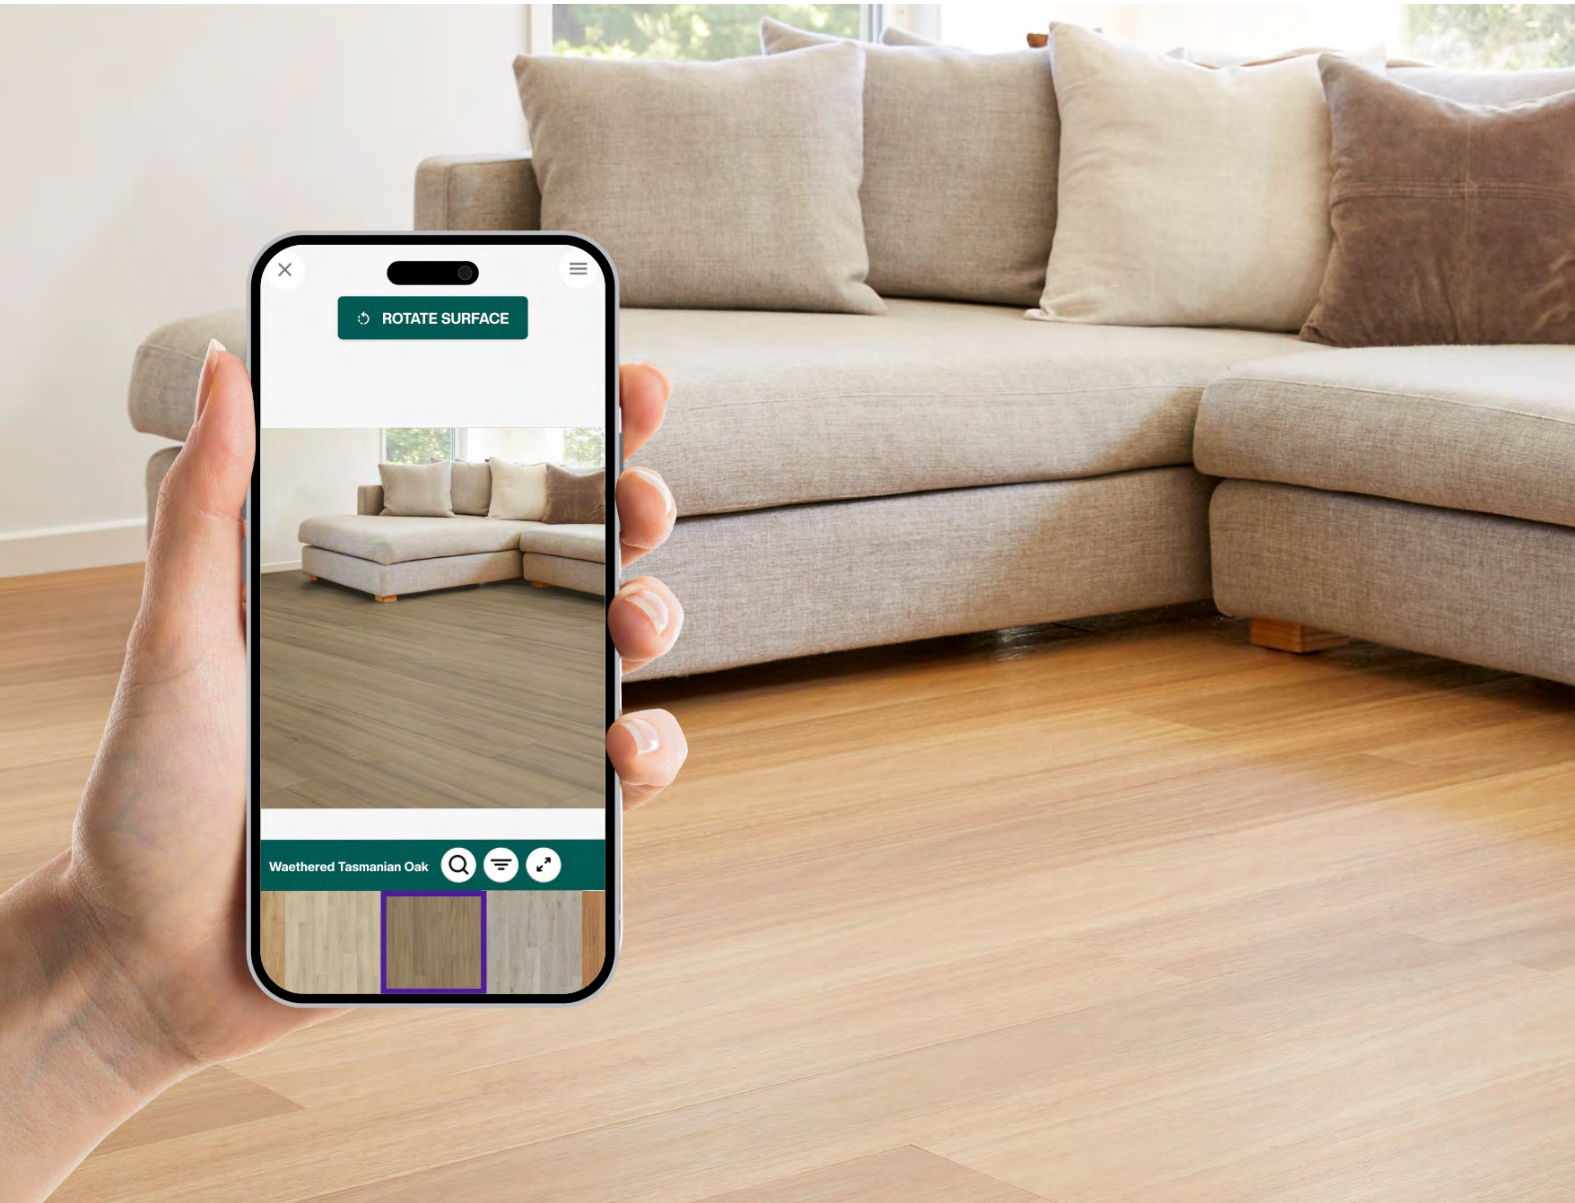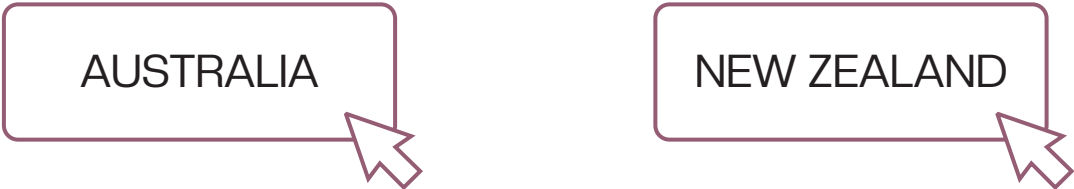

Kingswood™ 1.2

Technical Data

Product Classification		
Type of floor covering	Hybrid flooring	
Classification (Use Area)	ISO 10874	Domestic: 23 (Heavy) Commercial: 31 (Moderate)
Warranty*	Residential Commercial - available upon request	15 years 3 years
<small>*All warranties are in addition to any rights consumers may have under Australian and New Zealand consumer laws. Terms and conditions apply - for full information in respect to the scope of the residential warranty, please see armstrongflooring.au or armstrongflooring.co.nz or contact our Head Office. For the commercial warranty, contact your Armstrong Flooring representative.</small>		

Physical Properties		
Surface Treatment	Cerashield® Surface Technology	
Colours (Standard)	12	
Overall thickness (mm)	ISO 24346	6.0
Wear layer (mm)	ISO 24340	0.30
Bevel	Micro	
Core type	A-Lite Core Technology®	
Locking system	Angle/Angle - Side Tap (Manufactured under license from Unilin BV)	
Backing type	150mm XFD Acoustic Backing®	
Dimensions (mm)	ISO 24342	1220 x 180
Planks/carton	11	
m²/carton	2.42	
m²/pallet	145.2	
kg/carton	20.5	

Installation		
To current AS/NZS 1884 and Armstrong Flooring Hybrid Installation Instructions		
Sustainability		
Global GreenTag	GreenRate Level A	
TVOC Emissions	Compliant with Green Building Council low emitting VOC emission rates	

Technical Performance		
Slip Resistance	AS 4586 Wet Pendulum (Appendix A)	P3
Fire Resistance (Floor)	AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate	≥ 4.5kW/m² ≤ 750%.min
Acoustic	ISO 10140-3 & ISO 717-2 Impact sound insulation	L _{n,w} = 40dB <small>(150mm concrete with drop ceiling - 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)</small>
	ASTM E989-21 Impact insulation class	IIC = 70 <small>(150mm concrete and drop ceiling - 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)</small>
	ISO 712-2 Improvement of impact sound insulation	ΔL _w = 20dB <small>(200mm concrete slab)</small>
Other		
Colour fastness	ISO 105-B02, Method 3	≥ 6

Accreditation		
Manufactured under accredited ISO 9001 quality, ISO 14001 environmental and ISO 45001 OHS management systems		

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit [armstrongflooring.au](#) or [armstrongflooring.co.nz](#)
All Armstrong Flooring products must be installed in accordance with the relevant Australian and/or New Zealand applicable standards and the Armstrong Flooring Installation Instructions.
Variations may occur between samples, photographic images, and batches in terms of colour, shade, pattern or similar.



Learn more

www.armstrongflooring.au/kingswood1.2



www.armstrongflooring.co.nz/kingswood1.2



ArmstrongFlooring™

Australia

29-39 Mills Road, Braeside VIC 3195
1800 632 624
customerservices@armstrongflooring.au
www.armstrongflooring.au

New Zealand

39/332 Great North Road, Grey Lynn, Auckland 1021
0800 449 649
customerservices@armstrongflooring.co.nz
www.armstrongflooring.co.nz