


Brick & Block Lock 4.0mm

Masonry Reinforcing

Bricklock and Blocklock products have been developed to strengthen brick and block veneer walls. An excellent product for areas that are prone to cracking or movement. Made from 4mm thick galvanised or stainless steel rods.



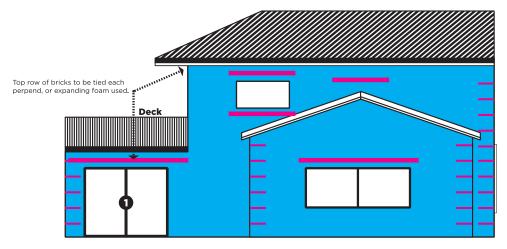

Brick & Block lock Straight
Assists in crack prevention on bricks of blocks that are laid in stacked bond.
Or when there is only a small row of bricks less then 800mm.
Masons recommended to install

Bricklock every 5th course.

Applications

When specifying or installing Bricklock, a common sense approach to where the product is installed must be used.

Most common areas to use the reinforcing are: Above all windows and to all external corners.

Other vulnerable areas are: where there is a gap smaller than 800mm, for example: A Window near a deck. Where a window meets a roof top. Roof top gable meets a soffit

Disclaimer - 'Bricklock' is designed to add strength to the brick veneer and is over and above normal New Zealand Building Code for brick veneer construction. At no stage do Masons guarantee that it will completely stop any possible cracking in the veneer.

Description	QTY	Masons Code
Bricklock 4.0mm Corner 27cm - Stainless Steel	10	BRICKLOCK CNR SS
Bricklock 4.0mm Corner 27cm - Galvanised	10	BRICKLOCK CNRGAL
Bricklock Straight 4.0mm 2m - Stainless Steel	10	BRICKLOCK STR SS
Bricklock Straight 4.0mm 2m - Galvanised	10	BRICKLOCK STRGAL
Bricklock Drop 4.0mm 70cm - Galvanised	10	BRICKLOCK DRPGAL
Blocklock Straight 4.0mm 140mmx2m - SS	10	BLOCKLOKSSSTR2M
Blocklock Straight 4.0mm 140mmx2m - Galv	10	BLOCKLOKGALSTR2M



Assists in crack prevention on external corners.

Masons recommended to install a Bricklock corner every **5th** course.