



Note: Drain position central unless dimensioned otherwise Step Entry Level Entry SKU: LQ-PAR-LH-LE SKU: LQ-PAR-LH-ST 1,460 o/a 1,410 o/a 1,395 16 1,369 1,369 See Waste Channel **Recess Specifications** Upstand Upstand Countersunk 434.5 for size 434.5 to 2 sides 877 To centre line of glazing to 2 sides Screw Holes 877 To centre line of glazing 910 o/a 960 o/a \_ Fall Fall 895 Floor Recess 1430x930x34 434.5 434.5 **Glazing Channel** Glazing Channel 1,377
To centre line of glazing ີ10ຼ 1,377
To centre line of glazing **Drain Section Edge Section Drain Section** Edge Section 1:80 Slope 1:80 Slope Floor Level 8mm Toughened Safety Glass Screen - Wall Framing Framing Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens 110|10 10|10 Waterproofing Upstand Upstand Flange Factory fitted Glazing Channel on side wall on side wall Countersunk Screw Holes \_F<u>loor</u> Level Shower Floor Shower Floor Recess Floor Recess Depth Level Level \_16 40 <sub>⊲</sub> 31 See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth information under floor information under floor Note: Verify exact shower base dimensions on site

## Screen Options:







For more product information go to:


www.atlantis.co.nz/shop/linea-quattro/paris-1400x900/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

## AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



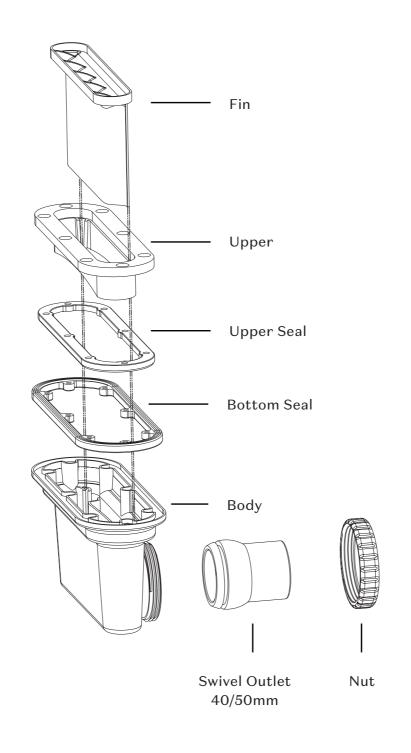

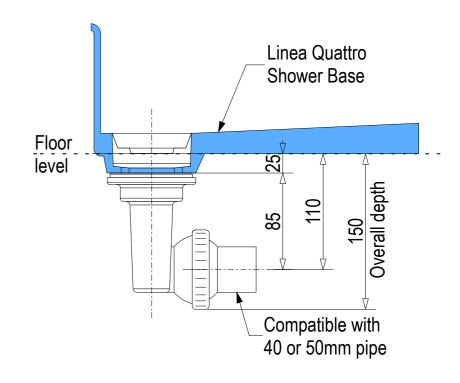

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



