

# CMPH – Ceiling Multi Pattern - Horizontal

## Model: CMPH – Ceiling Multi Pattern - Horizontal

The CMPH series of diffusers was developed to increase the acceptable application range of multi-pattern type ceiling outlets, for the reduced volumetric flow levels typically associated with VAV systems.

It is a variation on the basic CMP series with a horizontal blade added to each blade, which increases the induction rate, resulting in rapid mixing of supply and room air, which produces a strong ceiling effect at lower flows, minimising dumping.

These diffusers are also ideal for lower than normal ceiling heights, or low fixed volume air flows such as those usually found in centre zones.

In general, they operate at higher pressure, noise level, and throw distance than the equivalent Model CMP at the same flow.

### Construction

CMPH series diffusers are ruggedly constructed entirely of aluminium, are lightweight and have no heavy cast, or moulded components. Precision combination corner gussets and braces, keep mitres to a hairline and aluminium rivets hold the core components rigidly together, eliminating the possibility of warping, flexing, or rattling.

Panel diffusers (Type 2 on page 159D) are mechanically secured to steel panels with the unique Holyoake mounting pins, eliminating gaps and producing a super-fine junction between panel and extrusion.

### Installation

The diffusers frame assembly is installed in the ceiling opening and attached and sealed to the supply duct. The extensive range of cores, all snap in to the frame surrounds, with nickel plated spring steel thumb clips.


### Finish

All Holyoake aluminium diffusers receive a three stage preparation, prior to final finishing; cleaning, chemical etch and drying. This preparation ensures powder coat adhesion and precludes powder peeling, or flaking after installation.

Standard colour is Holyoake White.





### Features

- All aluminium lightweight construction.
- Precision mitred corners.
- Selection of frame styles.
- Variety of throw patterns.
- Snap-in interchangeable cores.
- Tough powder coat finish.
- Lightweight Premi-Aire and galvanised cushion head boxes available.

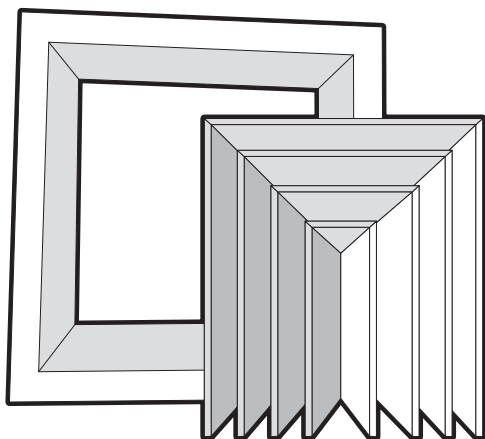

Due to a policy of continuous development and improvement the right is reserved to supply products which may differ slightly from those illustrated and described in this publication.


## Ceiling Diffuser

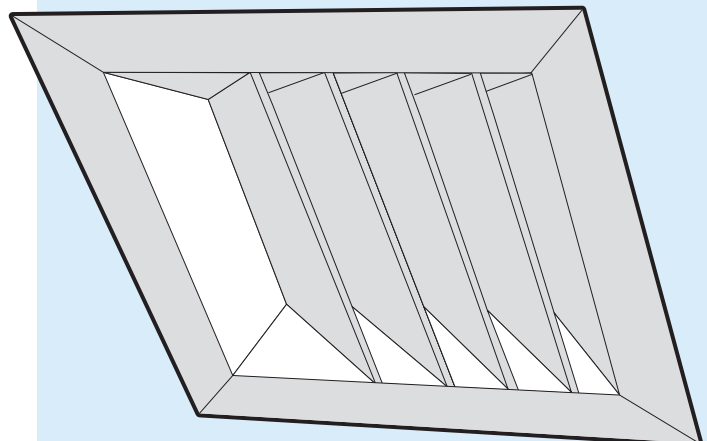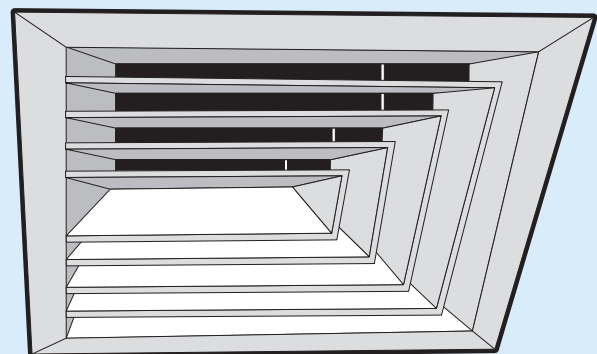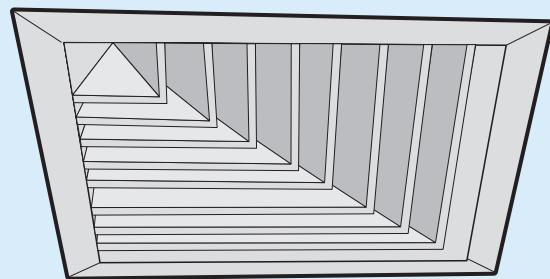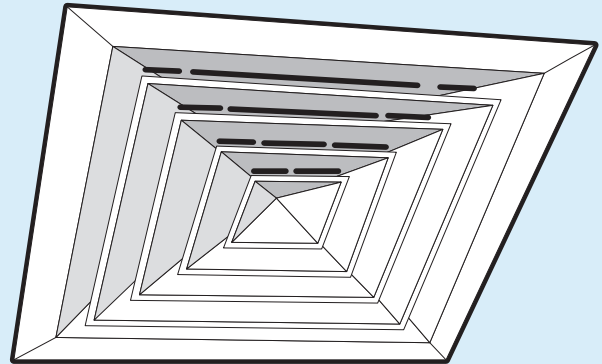

## Model: C MPH – Ceiling Multi Pattern Diffuser - Horizontal


### Standard Flange Frame.

Designed for surface mounting on all types of ceilings, as well as lay-in ceiling tile applications.

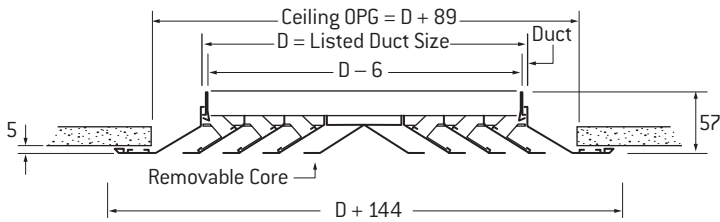

### Panel Diffuser.


Lay-in type for installation in suspended "T-Rail" type ceilings. Standard panel overall size is 595 x 595 to suit a 600 x 600 grid. Size 450 x 450 has an overall face size of 595 x 595. It therefore does not require a panel in a 600 grid and fits "T-Rail" spacing with clearance\*.

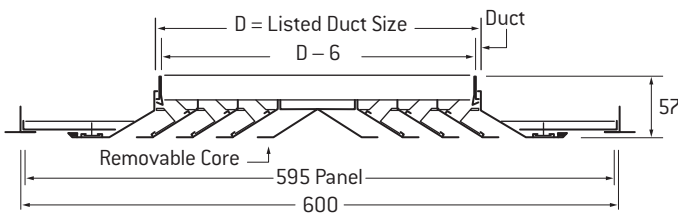

### Drop Frame.

Lowers the face of the diffuser below the ceiling line. Can be used to reduce smudging, or against obstacles to minimise drafts. Can be supplied in any height from 50-81mm, but unless otherwise specified, frame height of 50 mm will be furnished.


Special order only.

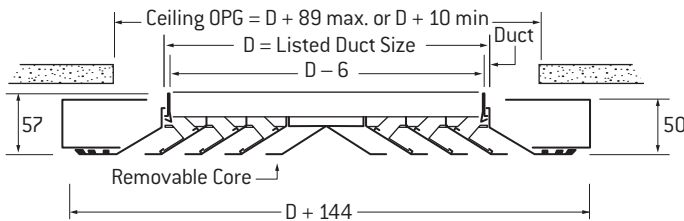

### Bevelled Drop Frame.

Smartly styled bevelled type surround reduces ceiling smudging. For all surface mounting applications.

Special order only.

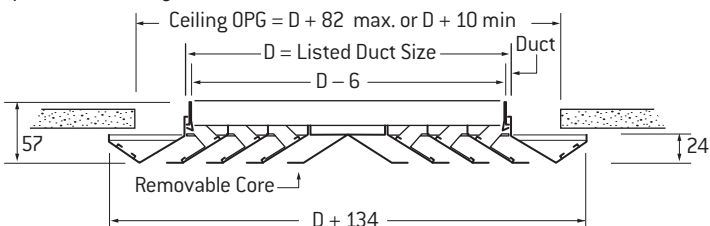

### Construction

#### Aluminium:


0.75mm extruded 6063-T5 aluminium outer frame.

0.55mm removable aluminium core.


\* Note: 0.75 mm Steel Panel on C MPH Type 2.

Product weights are shown on page 1610.


### Type 1

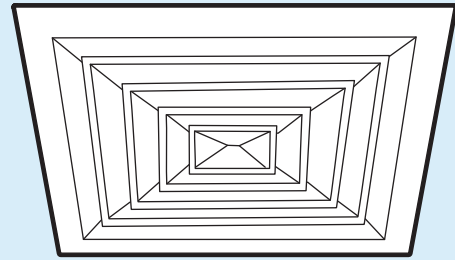


### Type 2

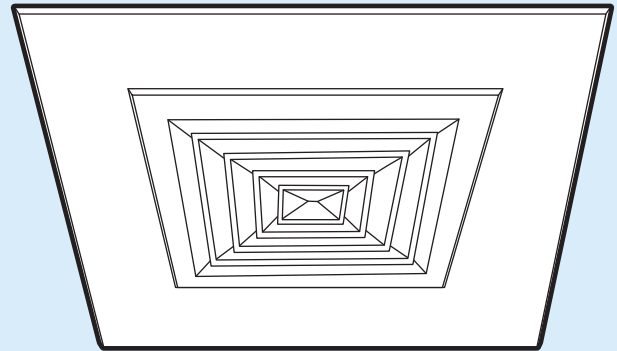



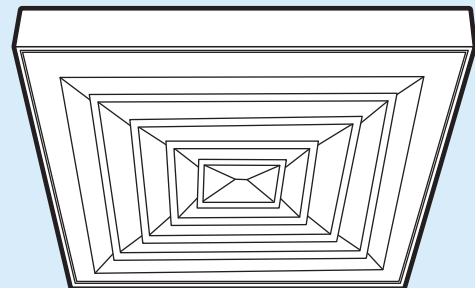



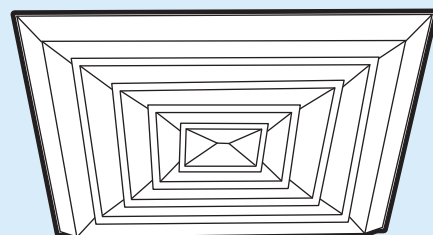








### Type 3



















### Type 4



# CMPH – Performance Data

Size in mm	Patterns		Neck Vel m/s TP Pa Static Pa	1.04 4 3	1.57 10 8	2.10 16 13	2.62 24 20	3.15 35 30	3.67 48 40
	Return Factors	NC+1 -SP=1.1 TP	Total m³/s NC	0.024 -	0.036 -	0.047 -	0.059 -	0.071 23	0.083 28
150 x 150  AD 0.023 m²	 21	 41	m³/s side	0.006	0.008	0.012	0.015	0.017	0.021
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
			m³/s side	0.005	0.007	0.009	0.012	0.014	0.017
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
		 36 *	m³/s side	0.012	0.018	0.024	0.030	0.035	0.041
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
			m³/s side	0.024	0.035	0.047	0.059	0.071	0.083
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
225 x 225  AD 0.051 m²	 21	 41	m³/s side	0.013	0.020	0.026	0.033	0.040	0.046
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
			m³/s side	0.010	0.016	0.021	0.026	0.032	0.037
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
		 36 *	m³/s side	0.026	0.040	0.053	0.066	0.079	0.092
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
			m³/s side	0.052	0.080	0.106	0.132	0.158	0.184
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
300 x 300  AD 0.090 m²	 21	 41	m³/s side	0.024	0.035	0.047	0.059	0.071	0.083
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
			m³/s side	0.019	0.028	0.038	0.047	0.057	0.066
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
		 36 *	m³/s side	0.047	0.071	0.094	0.118	0.142	0.165
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
			m³/s side	0.094	0.142	0.189	0.236	0.283	0.330
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
375 x 375  AD 0.141 m²	 21	 41	m³/s side	0.036	0.055	0.074	0.092	0.110	0.128
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
			m³/s side	0.029	0.044	0.059	0.074	0.088	0.103
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
		 36 *	m³/s side	0.073	0.111	0.147	0.184	0.220	0.257
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
			m³/s side	0.146	0.222	0.295	0.368	0.441	0.514
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
450 x 450  AD 0.202 m²	 21	 41	m³/s side	0.053	0.080	0.106	0.133	0.159	0.186
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
			m³/s side	0.042	0.064	0.085	0.106	0.127	0.149
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
		 36 *	m³/s side	0.106	0.159	0.212	0.265	0.319	0.371
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3
			m³/s side	0.212	0.319	0.425	0.531	0.637	0.743
			throw m	0.75 0.5 0.6 0.25	0.9 1.2 2.7	1.8 2.4 5.8	2.7 3.7 6.4	3.2 4.3 7	3.4 4.6 7.3



























\* These cores are constructed to give as near as possible equal air flow in A & B directions.






























Size in mm	Patterns		Neck Vel m/s TP Pa Static Pa	1.04 4 3	1.57 10 8	2.10 16 13	2.62 24 20	3.15 35 30	3.67 48 40
	Return Factors	NC+9 -SP=2.7 TP	Total m³/s NC	0.288 -	0.434 -	0.578 28	0.722 33	0.866 38	1.010 43
525 x 525  AD 0.276 m²		 <b>41</b>  <b>36 *</b>  <b>51</b>  <b>11</b>	m³/s side	0.072	0.109	0.144	0.180	0.217	0.252
			throw m	0.75 1.8 0.50 2.4 0.25 5.8	3.4 4.6 7.3	5 6.7 9.7	5.9 7.9 10.4	7.1 9.4 12.5	8 10.7 14.9
			m³/s side	0.058 0.115	0.087 0.174	0.116 0.231	0.144 0.289	0.173 0.346	0.202 0.404
			throw m	0.75 1.8 0.50 2.4 0.25 5.8	2.7 3.2 4.3 5.5 8.2	4.6 5.7 8.8 10.1	5.5 6.9 10.1 12.2	6.4 7.5 11.3 13.7	7.5 8.2 10.1 11.0 13.4 15.5
			m³/s side	0.144	0.217	0.289	0.361	0.433	0.505
			throw m	2.7 3.7 6.4	4.3 5.8 8.5	5.9 7.9 10.4	7.1 9.4 12.5	8.8 10.4 14.6	9.1 11.3 15.8
			m³/s side	0.288	0.434	0.578	0.722	0.866	1.010
			throw m	0.75 3.4 0.50 4.6 0.25 7.3	5.5 7.3 10.1	7.1 9.4 12.5	8.0 10.7 14.9	8.7 11.6 16.2	9.1 12.2 17.4
			Total m³/s NC	0.378 -	0.566 -	0.755 28	0.944 33	1.133 38	1.321 43
			m³/s side	0.094	0.142	0.189	0.236	0.283	0.330
			throw m	0.75 2.5 0.50 3.4 0.25 6.1	3.9 5.2 7.9	5.5 7.3 10.1	6.4 8.5 11.3	7.5 10.1 13.7	8.2 11.0 15.5
			m³/s side	0.076 0.151	0.113 0.227	0.151 0.302	0.189 0.378	0.227 0.453	0.264 0.529
600 x 600  AD 0.36 m²		 <b>41</b>  <b>36 *</b>  <b>51</b>  <b>11</b>	m³/s side	0.076 0.151	0.113 0.227	0.151 0.302	0.189 0.378	0.227 0.453	0.264 0.529
			throw m	0.75 1.8 0.50 2.4 0.25 6.1	3.4 4.6 7.3 9.1	5.0 6.7 9.7 10.4	5.9 7.9 10.4 12.8	7.1 9.4 12.5 14.9	8.2 10.4 14.3 18.0
			m³/s side	0.188	0.283	0.378	0.472	0.566	0.661
			throw m	0.75 3.0 0.50 4.0 0.25 6.7	5.0 6.7 9.7	6.6 8.8 11.3	7.5 10.1 13.7	8.2 11.0 14.6	8.7 11.6 16.8
			m³/s side	0.378	0.566	0.755	0.944	1.133	1.321
			throw m	0.75 3.9 0.50 5.2 0.25 7.9	5.9 7.9 10.4	7.3 9.7 13.1	8.7 11.6 15.8	8.9 11.9 17.1	9.6 12.8 18.0
			Total m³/s NC	0.477 -	0.717 -	0.956 28	1.194 33	1.432 38	1.671 43
			m³/s side	0.119	0.179	0.239	0.298	0.358	0.418
			throw m	0.75 2.7 0.50 3.7 0.25 6.4	4.6 6.1 9.1	5.7 7.6 10.4	6.9 9.1 12.2	7.8 10.4 14.6	8.5 11.3 15.8
			m³/s side	0.095 0.191	0.143 0.287	0.191 0.382	0.239 0.478	0.286 0.573	0.334 0.668
			throw m	0.75 2.3 0.50 3.0 0.25 6.4	3.9 5.2 7.9 9.7	5.5 7.3 10.1 11.6	6.4 8.5 11.3 13.7	7.5 10.1 13.7 15.5	8.0 10.7 14.9 16.2
			m³/s side	0.238	0.359	0.478	0.597	0.716	0.835
			throw m	0.75 3.2 0.50 4.3 0.25 7.0	5.5 7.3 10.1	7.3 9.7 12.2	7.8 10.4 14.6	8.7 11.6 16.2	8.9 11.9 17.4
675 x 675  AD 0.456 m²		 <b>41</b>  <b>36 *</b>  <b>51</b>  <b>11</b>	m³/s side	0.119	0.179	0.239	0.298	0.358	0.418
			throw m	0.75 2.7 0.50 3.7 0.25 6.4	4.6 6.1 9.1	5.7 7.6 10.4	6.9 9.1 12.2	7.8 10.4 14.6	8.5 11.3 15.8
			m³/s side	0.095 0.191	0.143 0.287	0.191 0.382	0.239 0.478	0.286 0.573	0.334 0.668
			throw m	0.75 2.3 0.50 3.0 0.25 6.4	3.9 5.2 7.9 9.7	5.5 7.3 10.1 11.6	6.4 8.5 11.3 13.7	7.5 10.1 13.7 15.5	8.0 10.7 14.9 16.2
			m³/s side	0.238	0.359	0.478	0.597	0.716	0.835
			throw m	0.75 3.2 0.50 4.3 0.25 7.0	5.5 7.3 10.1	7.3 9.7 12.2	7.8 10.4 14.6	8.7 11.6 16.2	8.9 11.9 17.4
			m³/s side	0.477	0.717	0.956	1.194	1.432	1.671
			throw m	0.75 4.3 0.50 5.8 0.25 8.5	6.4 8.5 11.3	7.5 10.1 14.3	8.9 11.9 16.5	9.1 12.2 17.4	10.1 13.4 18.6
			Total m³/s NC	0.713 -	1.071 23	1.428 28	1.784 33	2.140 38	2.497 43
			m³/s side	0.178	0.268	0.357	0.446	0.535	0.624
			throw m	0.75 3.0 0.50 4.0 0.25 7.0	4.8 6.4 9.7	6.6 8.8 11.3	7.5 10.1 13.1	8.0 10.7 14.9	8.7 11.6 16.2
			m³/s side	0.178	0.268	0.357	0.446	0.535	0.624
			throw m	0.75 3.0 0.50 4.0 0.25 7.0	4.8 6.4 9.7	6.6 8.8 11.3	7.5 10.1 13.1	8.0 10.7 14.9	8.7 11.6 16.2
825 x 825  AD 0.681 m²	Return Factors	NC+9 -SP=3.5 TP	Total m³/s NC	0.713 -	1.071 23	1.428 28	1.784 33	2.140 38	2.497 43
		 <b>41</b>	m³/s side	0.178	0.268	0.357	0.446	0.535	0.624
			throw m	0.75 3.0 0.50 4.0 0.25 7.0	4.8 6.4 9.7	6.6 8.8 11.3	7.5 10.1 13.1	8.0 10.7 14.9	8.7 11.6 16.2

\*These cores are constructed to give as near as possible equal air flow in A & B directions.

Guide Product Weights		
Approximate Weight in Kg.		
Size	CMPH141	CMPH241
150 x 150	0.53	2.77
225 x 225	0.91	2.84
300 x 300	1.33	2.89
375 x 375	1.79	2.94
450 x 450	2.35	3.05





























CMPH – Performance Data

Size in mm	Patterns		Neck Vel m/s TP Pa Static Pa	1.04 4 3	1.57 10 8	2.10 16 13	2.62 24 20	3.15 35 30	3.67 48 40	
150 x 225	Return Factors	NC+0 -SP=1.3 TP	Total m³/s NC	0.035 -	0.052 -	0.071 -	0.087 23	0.104 28	0.123 33	
	 42	 43	m³/s side	A B	A B	A B	A B	A B	A B	
			throw m	0.75 0.7 0.5 0.9 0.6 2.1 0.9 0.25	0.012 0.006 0.017 1.1 0.9 2.6 1.8 4.3 2.7 6.1 5.8	0.024 0.012 0.029 2.6 1.8 3.2 2.8 4.1 3.2 5.5 4.3 7 6.4	0.035 0.017 0.044 3.2 2.8 4.6 3.7 5.5 4.6 8.2 7 9.1 7.6	0.041 0.020 0.052 4.8 3.5 6.4 5.2 7.3 8.8 7.3 10.1 8.5		
			m³/s side	A B	A B	A B	A B	A B	A B	
	 31	 32	throw m	0.75 0.7 0.5 0.9 0.6 2.1 0.9 0.25	0.014 0.007 0.021 1.6 1.1 2.8 2.4 3.7 2.4 6.4 5.8	0.037 0.015 0.044 3.5 2.8 4.6 3.7 5.5 4.6 8.2 7 9.1 7.6	0.044 0.018 0.052 4.4 3.5 6.4 5.2 7.3 8.8 7.3 10.1 8.5	0.052 0.021 0.061 5.0 3.9 6.7 5.2 7.9 9.7 7.9 10.1 8.5		
			m³/s side	A B	A B	A B	A B	A B	A B	
			throw m	0.75 0.7 0.5 0.9 0.6 2.1 0.9 0.25	0.013 0.011 0.020 1.6 1.1 3.0 2.3 4.0 3.0 6.7 6.1 7.9 7.0	0.027 0.022 0.033 3.0 2.3 4.0 3.0 5.2 4.0 8.1 7.9 9.1 8.5	0.033 0.028 0.040 3.9 3.0 4.6 3.7 6.1 4.9 9.1 8.5 10.1 8.5	0.046 0.039 0.055 5.5 4.4 7.3 5.8 8.5 10.1 8.5 10.1 8.5		
	 22, 23	 52, 55	m³/s side	A B	A B	A B	A B	A B	A B	
			throw m	0.75 0.7 0.5 0.9 0.6 2.1 0.9 0.25	0.018 0.8 1.1 2.6 2.6 5.5 4.0 4.0 4.0 7.7 7.7 9.5 9.5	0.035 3.6 4.8 6.2 6.2 8.0 8.0 9.5 9.5 11.7 11.7 12.4 12.4	0.043 4.7 6.2 7.3 7.3 8.5 8.5 9.5 9.5 11.7 11.7 12.4 12.4	0.052 5.5 7.3 8.5 8.5 9.5 9.5 11.7 11.7 12.4 12.4 13.5 13.5		
			m³/s side	A B	A B	A B	A B	A B	A B	
			throw m	0.75 0.7 0.5 0.9 0.6 2.1 0.9 0.25	0.023 1.1 1.5 3.4 3.4 6.1 5.5 7.3 6.1 9.5 9.5 11.7 11.7	0.047 3.5 4.6 6.1 6.1 8.5 8.5 9.5 9.5 11.7 11.7 12.4 12.4	0.058 4.6 5.5 7.3 7.3 8.5 8.5 9.5 9.5 11.7 11.7 12.4 12.4	0.069 5.5 6.4 8.5 8.5 9.5 9.5 11.7 11.7 12.4 12.4 13.5 13.5		
150 x 300	Return Factors	NC+2 -SP=1.7 TP	Total m³/s NC	0.047 -	0.071 -	0.094 -	0.118 23	0.142 28	0.165 33	
	 42	 43	m³/s side	A B	A B	A B	A B	A B	A B	
			throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.018 0.006 0.027 1.6 0.9 3.0 2.0 4.0 2.7 6.7 6.1 7.3 6.7	0.035 0.012 0.044 3.0 2.0 4.6 3.0 5.5 4.0 8.5 7.3 9.1 8.5	0.053 0.018 0.062 4.4 3.5 5.8 3.5 6.7 5.5 8.5 7.3 9.1 8.5	0.062 0.021 0.072 5.0 4.4 6.7 4.4 7.3 6.1 8.5 7.3 9.1 8.5		
			m³/s side	A B	A B	A B	A B	A B	A B	
	 31	 32	throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.020 0.006 0.031 1.8 1.4 3.0 2.6 4.0 3.4 7.0 6.1 7.9 7.0	0.041 0.012 0.052 3.0 2.6 4.6 3.0 5.2 4.0 8.5 7.3 9.1 8.5	0.062 0.018 0.072 4.4 3.5 6.7 4.4 7.3 6.1 8.5 7.3 9.1 8.5	0.072 0.021 0.083 5.0 4.4 7.3 5.0 7.9 6.7 9.1 8.5 10.1 9.1		
			m³/s side	A B	A B	A B	A B	A B	A B	
			throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.023 0.012 0.035 2.3 1.6 3.0 2.1 4.3 3.4 7.0 6.1 7.9 6.1	0.047 0.024 0.060 3.2 2.6 4.4 3.2 5.8 4.3 8.5 7.3 9.1 8.5	0.071 0.035 0.083 4.4 3.5 6.7 4.4 7.3 6.1 8.5 7.3 9.1 8.5	0.083 0.041 0.097 5.0 4.4 7.3 5.0 7.9 6.7 9.1 8.5 10.1 9.1		
	 22, 23	 52, 55	m³/s side	A B	A B	A B	A B	A B	A B	
			throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.024 1.1 1.5 3.3 3.3 5.9 5.9 7.0 6.1 8.4 8.4 9.5 9.5	0.047 3.8 5.1 6.1 6.1 7.3 7.3 8.5 7.3 9.5 9.5 10.1 10.1	0.059 5.2 6.7 7.3 7.3 8.5 8.5 9.5 8.5 10.1 10.1 11.7 11.7	0.071 6.0 7.3 8.5 8.5 9.5 9.5 10.1 9.5 11.7 11.7 12.4 12.4		
			m³/s side	A B	A B	A B	A B	A B	A B	
			throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.036 0.011 0.054 2.8 1.4 3.7 3.2 4.3 3.7 7.9 6.1 8.5 7.3	0.071 0.023 0.094 3.9 2.6 5.2 4.0 5.8 4.3 9.1 7.3 8.5 7.3	0.090 5.0 6.7 7.3 7.3 8.5 8.5 9.5 8.5 10.1 10.1 11.7 11.7	0.108 5.9 7.3 8.5 8.5 9.5 9.5 10.1 9.5 11.7 11.7 12.4 12.4		
150 x 375	Return Factors	NC+2 -SP=2.0 TP	Total m³/s NC	0.059 -	0.087 -	0.118 -	0.146 23	0.175 28	0.205 33	
	 22, 23	 52, 55	m³/s side	A B	A B	A B	A B	A B	A B	
			throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.029 1.4 3.0 3.0 4.0 4.0 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5	0.044 3.0 4.6 4.6 5.8 5.8 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1	0.059 4.1 5.5 5.5 6.7 6.7 8.5 8.5 9.5 9.5 10.1 10.1 11.7 11.7	0.073 5.5 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1 11.7 11.7		
			m³/s side	A B	A B	A B	A B	A B	A B	
	 12, 13	 54, 53	throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.047 1.6 3.2 3.2 4.3 4.3 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5	0.071 2.1 3.7 3.7 4.3 4.3 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5	0.094 2.6 4.3 4.3 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5	0.117 3.2 4.3 4.3 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5		
			m³/s side	A B	A B	A B	A B	A B	A B	
			throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.059 2.2 3.8 3.8 4.3 4.3 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5	0.087 3.8 5.1 5.1 6.1 6.1 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1	0.118 4.3 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1	0.146 5.1 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1 11.7 11.7		
	150 x 450	Return Factors	NC+3 -SP=2.8 TP	Total m³/s NC	0.071 -	0.106 -	0.142 -	0.177 23	0.212 28	0.248 33
		 22, 23	 12, 13	m³/s side	A B	A B	A B	A B	A B	A B
				throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.035 1.7 3.3 3.3 4.4 4.4 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5	0.053 3.3 4.4 4.4 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5	0.071 4.4 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1	0.088 5.5 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1 11.7 11.7	
				m³/s side	A B	A B	A B	A B	A B	A B
 12, 13		 54, 53	throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.071 2.5 4.1 4.1 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5	0.106 3.2 4.3 4.3 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5	0.142 4.3 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1	0.177 5.1 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1 11.7 11.7		
			m³/s side	A B	A B	A B	A B	A B	A B	
			throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.087 3.8 5.1 5.1 6.1 6.1 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1	0.118 4.3 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1	0.146 5.1 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1 11.7 11.7	0.177 5.5 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1 11.7 11.7		
150 x 525		Return Factors	NC+4 -SP=3.4 TP	Total m³/s NC	0.083 -	0.123 -	0.165 -	0.205 23	0.245 28	0.288 33
		 12, 13	 54, 53	m³/s side	A B	A B	A B	A B	A B	A B
				throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.083 2.5 4.4 4.4 5.9 5.9 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1	0.123 3.2 4.3 4.3 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5	0.165 4.3 5.5 5.5 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1	0.205 5.1 6.7 6.7 7.3 7.3 8.5 8.5 9.5 9.5 10.1 10.1 11.7 11.7	
				m³/s side	A B	A B	A B	A B	A B	A B
	225 x 300	Return Factors	NC+5 -SP=4.1 TP	Total m³/s NC	0.071 -	0.106 -	0.142 -	0.177 28	0.212 33	0.248 38
		 42	 43	m³/s side	A B	A B	A B	A B	A B	A B
				throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.023 0.013 0.033 1.6 1.1 2.3 1.6 3.0 2.1 4.0 3.7 5.8 4.3 7.0 6.4	0.044 3.0 2.8 2.8 3.7 3.7 4.6 4.6 5.5 5.5 6.4 6.4 7.3 6.4	0.056 0.033 0.066 4.4 3.2 5.3 4.1 6.4 5.5 7.3 5.5 8.5 7.0 9.7 8.2	0.066 0.040 0.078 5.3 4.1 6.4 4.4 7.3 6.4 8.5 7.3 9.7 8.2 10.4 10.1	
				m³/s side	A B	A B	A B	A B	A B	A B
		 31	 32	throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.029 0.013 0.043 2.6 1.6 3.5 2.8 4.6 3.7 6.1 5.8 7.3 6.4 8.5 7.9	0.058 0.027 0.072 3.5 2.8 4.6 3.5 5.5 4.6 6.7 6.1 7.3 6.4 8.5 7.9	0.072 0.033 0.086 4.6 3.5 5.5 4.4 6.4 5.5 7.3 5.8 8.5 7.3 9.7 8.2	0.086 0.040 0.101 5.5 4.4 6.4 4.4 7.3 6.4 8.5 7.3 9.7 8.2 10.4 10.1	
				m³/s side	A B	A B	A B	A B	A B	A B
				throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.023 0.023 0.035 2.8 1.8 3.7 2.4 4.9 4.0 6.7 5.2 7.9 4.9 9.7 7.9	0.047 0.047 0.059 3.7 3.0 4.9 4.0 6.7 5.2 7.9 6.4 9.7 5.2 10.4 9.1	0.059 0.059 0.071 4.6 3.9 6.7 5.2 7.9 6.4 9.7 5.2 10.4 9.1 11.7 9.1	0.071 0.071 0.083 5.5 4.6 7.3 5.2 8.5 7.3 9.7 6.4 11.7 9.1 12.4 9.1	
 52, 55		 54, 53	m³/s side	A B	A B	A B	A B	A B	A B	
			throw m	0.75 0.7 0.5 0.9 0.9 2.4 1.5 0.25	0.045 0.026 0.066 3.5 1.6 4.6 2.1 6.1 3.7 7.6 6.4 9.7 5.2 11.7 9.1	0.089 0.053 0.111 4.6 2.8 6.4 3.7 8.5 5.2 9.7 6.4 11.7 5.2 13.5 9.1	0.111 0.066 0.133 5.5 3.5 7.3 4.4 8.5 6.4 9.7 6.4 11.7 5.2 13.5 9.1	0.133 0.079 0.155 6.4 4.4 8.5 4.4 9.7 7.3 10.4 6.4 12.4 9.1 14.6 9.1		
			m³/s side	A B	A B	A B	A B	A B	A B	

























Size in mm	Patterns		Neck Vel m/s TP Pa Static Pa	1.04 5 3	1.57 10 8	2.10 16 13	2.62 24 20	3.15 35 30	3.67 48 40						
225 x 375	Return Factors	NC+4 -SP=1.8 TP	Total m³/s NC	0.088 -	0.132 -	0.177 -	0.221 28	0.266 33	0.310 38						
				A	B	A	B	A	B	A	B				
	 42  43	m³/s side	0.031	0.013	0.046	0.020	0.062	0.033	0.093	0.040	0.109	0.046			
		throw m	0.75	1.1	0.7	2.6	1.8	3.5	2.8	4.6	3.5	5.5	4.4	6.2	5.5
			0.50	1.5	0.9	3.4	2.4	4.6	3.7	6.1	4.6	7.3	5.8	8.2	7.3
			0.25	3.0	2.4	6.1	5.8	7.3	6.4	9.1	7.3	10.1	8.5	11	10.1
		 31	m³/s side	0.037	0.013	0.056	0.020	0.075	0.027	0.094	0.033	0.113	0.040	0.132	0.046
			throw m	0.75	1.4	0.7	2.8	1.8	3.7	3.0	5.0	3.9	5.7	4.6	6.6
	 32	m³/s side	0.037	0.026	0.055	0.039	0.074	0.052	0.092	0.064	0.111	0.078	0.129	0.090	
		throw m	0.75	1.6	0.9	3.0	2.3	3.9	3.0	5.3	4.4	6.2	5.0	7.1	5.9
			0.50	2.1	1.2	4.0	3.0	5.2	4.0	7.0	5.8	8.2	6.7	9.4	7.9
			0.25	4.6	2.7	6.7	6.1	8.2	7.0	10.1	8.5	10.7	9.8	12.5	10.4
 22, 23		m³/s side	0.044		0.066		0.089		0.111		0.133		0.155		
		throw m	0.75	2.0		3.6		4.7		6.3		7.4		8.5	
AD 0.084 m²	 52 55  54 53	m³/s side	0.062	0.026	0.093	0.039	0.124	0.053	0.155	0.066	0.159	0.067	0.218	0.092	
		throw m	0.75	1.8	0.7	3.5	1.8	5.0	3.9	5.9	6.8	5.0	7.6	5.5	
			0.50	2.4	0.9	4.6	2.4	6.7	4.0	7.9	5.2	9.1	6.7	10.1	7.3
			0.25	5.8	2.4	7.3	5.8	9.8	6.7	10.4	7.9	12.2	9.8	13.7	10.1
		 12, 13	m³/s side	0.088		0.132		0.177		0.221		0.266		0.310	
			throw m	0.75	2.8		4.4		6.3		7.7		9.1		9.6
		0.50	3.7		5.9		8.4		10.2		12.1		12.8		
		0.25	7.3		9.1		12.1		13.2		15.7		17.9		
225 x 450	Return Factors	NC+4 -SP=2.2 TP	Total m³/s NC	0.105 -	0.159 -	0.213 -	0.265 28	0.319 33	0.372 38						
				A	B	A	B	A	B	A	B	A	B		
	 42  43	m³/s side	0.040	0.013	0.060	0.020	0.080	0.027	0.100	0.033	0.120	0.040	0.140	0.046	
		throw m	0.75	1.4	0.9	2.8	2.0	3.9	3.0	5.0	3.9	5.7	4.8	6.6	5.7
			0.50	1.8	1.2	3.7	2.7	5.2	4.0	6.7	5.2	7.6	6.4	8.8	7.6
			0.25	3.7	2.7	6.4	6.1	7.9	6.7	9.8	7.9	10.1	9.4	11.9	10.1
		 31	m³/s side	0.046	0.013	0.070	0.020	0.093	0.027	0.116	0.033	0.140	0.040	0.163	0.046
			throw m	0.75	1.6	0.9	3.0	2.3	3.9	3.2	5.3	4.4	6.2	5.0	7.1
	 22, 23	m³/s side	0.053		0.080		0.107		0.133		0.160		0.186		
		throw m	0.75	2.0		3.8		5.2		6.6		7.7		9.1	
			0.50	2.6		5.1		6.9		8.8		10.2		12.1	
			0.25	6.6		8.4		10.2		12.1		13.5		15.7	
 52 55  54 53		m³/s side	0.079	0.026	0.120	0.039	0.160	0.053	0.200	0.065	0.240	0.079	0.280	0.092	
		throw m	0.75	2.3	0.9	3.7	2.3	5.3	3.2	6.6	4.4	7.4	5.0	8.0	5.9
AD 0.101 m²		0.50	3.0	1.2	4.9	3.0	7.0	4.3	8.8	5.8	9.8	6.7	10.7	7.9	
		0.25	6.1	2.7	7.6	6.1	10.1	7.0	11.3	8.5	12.8	9.8	14.9	10.4	
	 12, 13	m³/s side	0.105		0.159		0.213		0.265		0.319		0.372		
		throw m	0.75	3.3		5.2		6.6		8.3		9.6		9.9	
		0.50	4.4		6.9		8.8		11.0		12.8		13.2		
		0.25	7.7		10.2		12.4		14.6		17.2		18.3		
225 x 525	Return Factors	NC+5 -SP=2.6 TP	Total m³/s NC	0.123 -	0.185 -	0.248 23	0.309 28	0.372 33	0.434 38						
				A	B	A	B	A	B	A	B	A	B		
	 42  43	m³/s side	0.049	0.013	0.073	0.020	0.097	0.027	0.122	0.033	0.146	0.040	0.171	0.046	
		throw m	0.75	1.4	0.9	3.0	2.0	3.9	3.2	5.0	4.1	5.9	5.0	6.8	5.9
			0.50	1.8	1.2	4.0	2.7	5.2	4.3	6.7	5.5	7.9	6.7	9.1	7.9
			0.25	4.3	2.7	6.7	6.1	7.9	7.0	10.1	8.2	10.4	9.8	12.2	10.4
		 31	m³/s side	0.055	0.013	0.083	0.020	0.111	0.027	0.138	0.033	0.166	0.040	0.194	0.046
			throw m	0.75	1.6	0.9	3.2	2.3	4.4	3.5	5.5	4.4	6.4	5.3	7.4
	 22, 23	m³/s side	0.062		0.093		0.124		0.155		0.186		0.217		
		throw m	0.75	2.2		3.8		5.5		6.8		8.3		9.3	
			0.50	2.9		5.1		7.3		9.1		11.0		12.4	
			0.25	6.9		8.4		11.0		12.1		14.6		17.2	
 52 55  54 53		m³/s side	0.097	0.026	0.146	0.039	0.196	0.052	0.244	0.065	0.294	0.078	0.342	0.092	
		throw m	0.75	2.6	0.9	3.9	2.3	5.3	3.5	6.6	4.4	7.6	5.3	8.3	6.2
AD 0.118 m²		0.50	3.4	1.2	5.2	3.0	7.0	4.6	8.8	5.8	10.1	7.0	11.0	8.2	
		0.25	6.4	2.7	7.9	6.1	10.1	7.3	11.3	8.5	13.1	10.1	15.5	10.7	
	300 x 375	Return Factors	NC+3 -SP=1.7 TP	Total m³/s NC	0.117 -	0.177 -	0.236 23	0.295 28	0.354 33	0.413 38					
					A	B	A	B	A	B	A	B	A	B	
		 42  43	m³/s side	0.036	0.023	0.053	0.035	0.071	0.047	0.089	0.059	0.106	0.071	0.123	0.083
			throw m	0.75	1.4	0.9	3.0	2.0	3.9	3.2	5.0	4.1	5.9	5.0	6.8
			0.50	1.8	1.2	4.0	2.7	5.2	4.3	6.7	5.5	7.9	6.7	9.1	7.6
			0.25	4.3	2.7	6.7	6.1	7.9	7.0	9.7	8.2	10.4	9.8	12.2	10.1
 31			m³/s side	0.047	0.023	0.071	0.035	0.095	0.047	0.118	0.059	0.142	0.071	0.165	0.083
			throw m	0.75	1.6	0.9	3.0	2.3	4.4	3.2	5.3	4.4	6.4	5.3	7.1
 32		m³/s side	0.037	0.040	0.055	0.061	0.074	0.081	0.092	0.101	0.111	0.122	0.129	0.142	
		throw m	0.75	1.1	1.8	2.8	3.2	3.5	4.6	4.8	5.7	5.5	6.8	6.4	7.8
			0.50	1.5	2.4	3.7	4.3	4.6	6.1	6.4	7.6	7.3	9.1	8.5	10.4
			0.25	3.0	5.8	6.4	7.0	7.3	9.1	9.4	10.1	10.1	12.2	11.0	14.3
	 22, 23	m³/s side	0.059		0.088		0.118		0.148		0.177		0.207		
		throw m	0.75	2.2		3.8		5.5		6.8		8.3		9.3	
AD 0.113 m²	 52 55  54 53	m³/s side	0.070	0.047	0.106	0.071	0.142	0.094	0.177	0.118	0.212	0.142	0.248	0.165	
		throw m	0.75	2.6	0.9	3.9	2.3	5.3	3.5	6.6	4.4	7.6	5.3	8.3	6.2
			0.50	3.4	1.2	5.2	3.0	7.0	4.6	8.8	5.8	10.1	7.0	11.0	8.2
			0.25	6.4	2.7	7.9	6.1	10.1	7.3	11.3	8.5	13.1	10.1	15.5	10.7
		 12, 13	m³/s side	0.117		0.177		0.236		0.295		0.354		0.413	
			throw m	0.75	3.3		5.2		6.6		8.3		9.9		10.1
		0.50	4.4		6.9		8.8		11.0		13.2		13.5		
		0.25	7.7		10.2		12.4		14.6		17.6		18.7		



CMPH – Performance Data

Size in mm	Patterns	Neck Vel m/s TP Pa Static Pa	1.04 5 3	1.57 10 8	2.10 16 13	2.62 24 20	3.15 35 30	3.67 48 40
300 x 450	Return Factors NC+4 -SP=2.0 TP	Total m³/s NC	0.140 -	0.212 -	0.283 23	0.354 28	0.425 33	0.496 38
	 42  43	m³/s side	0.047	0.071	0.095	0.118	0.142	0.165
		throw m	0.75 0.50 0.25	0.023 1.6 2.1 5.2	0.035 3.2 4.3 6.7	0.047 4.4 5.8 8.5	0.059 5.5 7.3 10.1	0.071 6.4 8.5 11.0
	 31	m³/s side	0.059	0.088	0.118	0.147	0.177	0.206
		throw m	0.75 0.50 0.25	0.023 1.6 2.1 5.5	0.035 3.2 4.3 7.0	0.047 4.4 5.8 8.5	0.059 5.5 7.3 10.1	0.071 6.4 8.5 11.0
	 32	m³/s side	0.053	0.079	0.106	0.133	0.159	0.186
		throw m	0.75 0.50 0.25	0.044 2.0 2.7 6.1	0.066 3.5 4.6 7.3	0.089 5.0 6.7 9.8	0.111 5.9 7.9 10.4	0.133 7.1 9.4 12.5
	 22, 23	m³/s side	0.070	0.106	0.142	0.177	0.213	0.248
		throw m	0.75 0.50 0.25	0.044 2.5 3.3 7.3	0.066 4.1 5.5 8.8	0.089 6.0 8.0 11.7	0.111 7.1 9.5 12.4	0.133 8.5 11.3 15.0
	 52  54 53	m³/s side	0.093	0.141	0.189	0.236	0.283	0.331
		throw m	0.75 0.50 0.25	0.047 2.8 3.7 6.4	0.071 4.1 5.5 8.2	0.094 5.7 7.6 10.4	0.118 7.1 9.4 12.5	0.142 8.5 10.4 14.3
	 12, 13	m³/s side	0.140	0.212	0.283	0.354	0.425	0.496
		throw m	0.75 0.50 0.25	0.047 2.8 3.7 8.0	0.071 4.1 5.5 10.6	0.094 5.7 7.6 12.8	0.118 7.1 9.5 15.0	0.142 8.5 11.3 19.4
300 x 525	Return Factors NC+6 -SP=2.3 TP	Total m³/s NC	0.165 -	0.248 -	0.330 23	0.413 28	0.496 33	0.578 38
	 42  43	m³/s side	0.060	0.089	0.118	0.148	0.177	0.206
		throw m	0.75 0.50 0.25	0.023 1.8 2.4 5.8	0.035 3.2 4.3 7.0	0.047 4.4 5.8 8.5	0.059 5.5 7.6 10.1	0.071 6.4 8.5 11.3
	 22, 23	m³/s side	0.083	0.124	0.165	0.207	0.248	0.289
		throw m	0.75 0.50 0.25	0.037 2.5 3.3 7.3	0.055 4.1 5.5 8.8	0.071 6.0 8.0 11.7	0.089 7.1 9.5 12.4	0.107 8.5 11.3 15.0
	 52  54 53	m³/s side	0.118	0.177	0.236	0.295	0.355	0.413
		throw m	0.75 0.50 0.25	0.047 2.8 3.7 6.4	0.071 4.1 5.5 8.5	0.094 5.7 7.6 10.4	0.118 7.1 9.4 12.8	0.142 8.5 10.7 14.9
	 12, 13	m³/s side	0.187	0.283	0.378	0.472	0.566	0.661
		throw m	0.75 0.50 0.25	0.023 1.8 2.4 5.8	0.035 3.2 4.3 7.0	0.047 4.4 5.8 8.5	0.059 5.5 7.6 10.1	0.071 6.4 8.5 11.3
	 42  43	m³/s side	0.071	0.106	0.142	0.177	0.212	0.248
		throw m	0.75 0.50 0.25	0.023 1.8 2.4 5.8	0.035 3.2 4.3 7.0	0.047 4.4 5.8 8.5	0.059 5.5 7.6 10.1	0.071 6.4 8.5 11.3
	 22, 23	m³/s side	0.177	0.264	0.354	0.441	0.532	0.618
		throw m	0.75 0.50 0.25	0.023 1.8 2.4 5.8	0.035 3.2 4.3 7.0	0.047 4.4 5.8 8.5	0.059 5.5 7.6 10.1	0.071 6.4 8.5 11.3
375 x 450	Return Factors NC+5 -SP=2.1 TP	Total m³/s NC	0.177 -	0.264 -	0.354 23	0.441 28	0.532 33	0.618 38
	 42  43	m³/s side	0.052	0.077	0.103	0.129	0.155	0.180
		throw m	0.75 0.50 0.25	0.037 1.8 2.4 5.8	0.055 3.0 4.0 6.7	0.071 4.6 6.1 9.1	0.089 5.5 7.6 10.1	0.107 6.4 8.5 11.3
	 31	m³/s side	0.069	0.105	0.140	0.175	0.210	0.245
		throw m	0.75 0.50 0.25	0.037 2.0 2.7 6.1	0.055 3.5 4.6 7.3	0.071 5.0 6.7 9.8	0.089 5.9 7.9 10.4	0.107 6.6 8.8 11.3
	 32	m³/s side	0.053	0.079	0.106	0.133	0.159	0.186
		throw m	0.75 0.50 0.25	0.061 1.6 2.1 4.6	0.093 3.0 4.0 6.7	0.124 3.9 5.2 8.2	0.155 5.3 7.0 10.1	0.186 6.2 8.2 10.7
	 22, 23	m³/s side	0.103	0.155	0.207	0.258	0.310	0.362
		throw m	0.75 0.50 0.25	0.037 2.8 3.7 7.7	0.055 4.7 6.2 9.9	0.071 6.6 8.8 12.1	0.089 7.7 10.2 13.2	0.107 8.8 11.3 14.3
	 52  54 53	m³/s side	0.132	0.199	0.266	0.332	0.399	0.465
		throw m	0.75 0.50 0.25	0.073 3.0 4.0 7.0	0.110 4.8 6.4 9.4	0.147 6.2 8.2 10.7	0.184 7.6 9.4 13.7	0.221 8.3 10.7 15.2
	 12, 13	m³/s side	0.205	0.309	0.413	0.516	0.620	0.723
		throw m	0.75 0.50 0.25	0.037 3.8 5.1 8.4	0.055 6.1 8.1 11.7	0.071 8.0 10.6 13.5	0.089 9.1 12.1 15.2	0.107 10.1 13.5 17.6
375 x 600	Return Factors NC+7 -SP=2.7 TP	Total m³/s NC	0.234 -	0.353 -	0.473 23	0.590 28	0.709 33	0.826 38
	 42  43	m³/s side	0.080	0.122	0.163	0.203	0.244	0.284
		throw m	0.75 0.50 0.25	0.037 2.3 3.0 6.1	0.055 3.5 4.6 7.3	0.071 5.0 6.7 9.8	0.089 6.2 8.2 10.7	0.107 7.8 9.4 12.5
	 22, 23	m³/s side	0.117	0.177	0.237	0.295	0.355	0.413
		throw m	0.75 0.50 0.25	0.037 3.3 4.4 7.7	0.055 5.2 6.9 10.2	0.071 6.8 9.1 12.1	0.089 8.0 10.6 13.9	0.107 9.3 12.4 17.6
	 52  54 53	m³/s side	0.161	0.243	0.325	0.405	0.487	0.567
		throw m	0.75 0.50 0.25	0.073 3.2 4.3 7.0	0.110 5.0 6.7 9.8	0.148 6.4 8.5 11.3	0.185 7.6 9.4 13.7	0.222 8.5 10.7 15.5
	 12, 13	m³/s side	0.234	0.353	0.473	0.590	0.709	0.826
		throw m	0.75 0.50 0.25	0.037 3.8 5.1 8.8	0.055 6.1 8.1 11.7	0.071 8.0 10.6 14.6	0.089 9.1 12.4 17.6	0.107 10.1 13.5 20.1

Diffusers - Ceiling Multi Pattern

Size in mm	Patterns		Neck Vel m/s TP Pa Static Pa	1.04 5 3	1.57 10 8	2.10 16 13	2.62 24 20	3.15 35 30	3.67 48 40							
450 x 525	Return Factors	NC+6	Total m³/s	0.246	0.371	0.496	0.619	0.744	0.867							
		-SP=2.3 TP	NC	-	-	23	28	33	38							
	 31		m³/s side	0.097	0.053	0.146	0.079	0.195	0.106	0.243	0.133	0.292	0.159	0.341	0.186	
	 22, 23		throw m	0.75 2.6 0.50 3.4 0.25 6.4	0.053 1.6 2.1 5.2	0.146 3.9 5.2 7.9	0.079 3.2 4.3 6.7	0.195 5.3 7.0 10.1	0.106 4.4 5.8 8.5	0.243 6.6 8.8 11.3	0.133 5.5 7.3 10.1	0.292 7.6 10.1 13.7	0.159 6.2 8.2 10.7	0.341 8.3 11.0 15.2	0.186 7.4 9.8 12.8	
	 52  54 55 53		m³/s side	0.123	0.186	0.248	0.310	0.372	0.434							
	 12, 13		throw m	0.75 3.3 0.50 4.4 0.25 7.7	0.186 5.2 6.9 10.2	0.248 6.8 9.1 12.1	0.310 8.0 10.6 14.6	0.372 9.3 12.4 17.9	0.434 10.1 13.5 19.4							
			m³/s side	0.193	0.053	0.292	0.079	0.390	0.106	0.487	0.132	0.585	0.159	0.681	0.186	
			throw m	0.75 3.2 0.50 4.3 0.25 7.0	0.053 1.6 2.1 5.2	0.292 5.0 6.7 9.8	0.079 3.2 4.3 6.7	0.390 6.6 8.8 11.6	0.106 4.4 5.8 8.5	0.487 7.6 10.1 14.0	0.132 5.5 7.3 10.1	0.585 8.5 11.3 15.5	0.159 6.2 8.2 10.7	0.681 8.9 11.9 16.8	0.186 7.4 9.8 12.8	
			m³/s side	0.246	0.371	0.496	0.619	0.744	0.867							
			throw m	0.75 4.1 0.50 5.5 0.25 8.8	0.371 6.3 8.4 12.1	0.496 8.5 11.3 15.0	0.619 9.9 13.2 17.6	0.744 10.4 13.9 19.8	0.867 10.7 14.3 20.5							
450 x 600	Return Factors	NC+7	Total m³/s	0.281	0.424	0.567	0.707	0.851	0.991							
		-SP=2.6 TP	NC	-	-	23	28	33	38							
	 42		m³/s side	0.088	0.053	0.133	0.079	0.178	0.106	0.221	0.133	0.267	0.159	0.310	0.186	
	 43		throw m	0.75 2.6 0.50 3.4 0.25 6.4	0.053 1.6 2.1 5.2	0.133 3.9 5.2 7.9	0.079 3.0 4.0 7.0	0.178 5.5 7.3 10.1	0.106 4.1 5.5 8.5	0.221 6.4 8.5 11.3	0.133 5.3 7.0 10.1	0.267 7.6 10.1 13.7	0.159 6.4 8.5 11.0	0.310 8.3 11.0 15.5	0.186 7.1 9.4 12.5	
	 31		m³/s side	0.114	0.053	0.172	0.079	0.230	0.106	0.287	0.133	0.346	0.159	0.403	0.186	
	 32		throw m	0.75 2.8 0.50 3.7 0.25 6.4	0.053 1.8 2.4 5.8	0.172 4.4 5.8 8.5	0.079 3.2 4.3 7.0	0.230 5.7 7.6 10.1	0.106 4.6 6.1 8.8	0.287 6.8 9.1 12.2	0.133 5.7 7.6 10.1	0.346 8.0 10.7 14.6	0.159 6.6 8.8 11.3	0.403 8.5 11.3 15.5	0.186 7.6 10.1 13.1	
	 22, 23		m³/s side	0.094	0.094	0.141	0.141	0.189	0.189	0.236	0.236	0.284	0.284	0.330	0.330	
			throw m	0.75 3.0 0.50 4.0 0.25 6.7	0.094 2.0 2.7 6.1	0.141 4.6 6.1 8.8	0.141 3.5 4.6 7.3	0.189 5.9 7.9 10.4	0.189 5.0 6.7 9.8	0.236 7.1 9.4 12.5	0.236 5.9 7.9 10.4	0.284 8.0 10.7 14.9	0.284 7.1 9.4 12.5	0.330 8.7 11.6 16.2	0.330 8.0 10.7 14.6	
	 52  54 55 53		m³/s side	0.228	0.053	0.345	0.080	0.461	0.106	0.574	0.133	0.691	0.160	0.805	0.186	
	 12, 13		throw m	0.75 3.5 0.50 4.6 0.25 7.3	0.053 1.8 2.4 5.8	0.345 5.3 7.0 10.1	0.080 3.2 4.3 7.0	0.461 6.8 9.1 12.2	0.106 4.6 6.1 8.8	0.574 7.8 10.4 14.3	0.133 5.7 7.6 10.1	0.691 8.7 11.6 15.8	0.160 6.6 8.8 11.3	0.805 9.2 12.2 17.1	0.186 7.6 10.1 13.1	
525 x 675	Return Factors	NC+9	Total m³/s	0.369	0.556	0.744	0.928	1.116	1.301							
		-SP=3.2 TP	NC	-	-	23	28	33	38							
	 31		m³/s side	0.148	0.072	0.224	0.108	0.300	0.145	0.374	0.181	0.450	0.217	0.524	0.253	
	 32		throw m	0.75 3.0 0.50 4.0 0.25 6.7	0.072 2.0 2.7 6.1	0.224 4.6 6.1 9.1	0.108 3.5 4.6 7.3	0.300 5.9 7.9 10.4	0.145 5.0 6.7 9.8	0.374 7.1 9.4 12.5	0.181 5.9 7.9 10.4	0.450 8.5 11.3 15.5	0.217 7.1 9.4 12.5	0.524 8.7 11.6 16.2	0.253 7.8 10.4 13.7	
	 22, 23		m³/s side	0.125	0.118	0.189	0.179	0.252	0.239	0.315	0.298	0.379	0.359	0.441	0.418	
			throw m	0.75 3.2 0.50 4.3 0.25 7.0	0.118 2.3 3.0 6.1	0.189 5.0 6.7 9.8	0.179 3.9 5.2 7.9	0.252 6.4 8.5 11.0	0.239 5.0 6.7 10.1	0.315 7.6 10.1 13.4	0.298 6.4 8.5 11.6	0.379 8.3 11.0 15.2	0.359 7.6 10.1 13.1	0.441 18.9 11.9 16.5	0.418 8.0 10.7 14.9	
	 52  54 55 53		m³/s side	0.185	0.278	0.372	0.464	0.558	0.651							
	 12, 13		throw m	0.75 3.8 0.50 5.1 0.25 8.4	0.278 6.0 8.0 11.7	0.372 7.7 10.2 13.2	0.464 9.1 12.1 16.1	0.558 9.9 13.2 18.7	0.651 10.7 14.3 20.1							
			m³/s side	0.297	0.072	0.448	0.108	0.599	0.145	0.748	0.180	0.899	0.217	1.048	0.253	
			throw m	0.75 3.7 0.50 4.9 0.25 7.6	0.072 2.0 2.7 6.1	0.448 5.5 7.3 10.4	0.108 3.5 4.6 7.3	0.599 7.1 9.4 12.5	0.145 5.0 6.7 9.8	0.748 8.0 10.7 14.9	0.180 5.9 7.9 10.4	0.899 8.7 11.6 16.2	0.217 7.1 9.4 12.5	1.048 9.4 12.5 17.4	0.253 7.8 10.4 13.7	
525 x 825	Return Factors	NC+9	Total m³/s	0.450	0.680	0.910	1.135	1.364	1.590							
		-SP=3.3 TP	NC	-	-	23	28	33	38							
	 42		m³/s side	0.153	0.072	0.232	0.108	0.310	0.145	0.387	0.181	0.465	0.217	0.542	0.253	
	 43		throw m	0.75 3.0 0.50 4.0 0.25 6.7	0.072 2.3 3.0 6.1	0.232 4.6 6.1 8.8	0.108 3.5 4.6 7.3	0.310 5.9 7.9 10.4	0.145 5.0 6.7 9.7	0.387 7.1 9.4 12.5	0.181 5.9 7.9 10.4	0.465 8.0 10.7 15.2	0.217 7.1 9.4 12.5	0.542 8.7 11.6 16.2	0.253 7.6 10.1 13.7	
			m³/s side	0.468	0.707	0.945	1.179	1.418	1.652							
			throw m	0.75 4.7 0.50 6.2 0.25 9.5	0.707 7.1 9.5 12.8	0.945 8.8 11.7 15.7	1.179 10.4 13.9 19.0	1.418 10.7 14.3 20.5	1.652 11.6 15.4 21.6							
	600 x 750	Return Factors	NC+9	Total m³/s	0.468	0.707	0.945	1.179	1.418	1.652						
			-SP=3.5 TP	NC	-	-	23	28	33	38						
		 42		m³/s side	0.140	0.094	0.212	0.141	0.284	0.189	0.354	0.236	0.425	0.284	0.496	0.330
		 43		throw m	0.75 3.0 0.50 4.0 0.25 6.7	0.094 2.3 3.0 6.1	0.212 4.8 6.4 9.1	0.141 3.5 4.6 7.3	0.284 6.2 8.2 10.7	0.189 5.0 6.7 9.8	0.354 7.4 9.8 12.8	0.236 6.2 8.2 10.7	0.425 8.0 10.7 15.2	0.284 7.1 9.4 12.5	0.496 8.9 11.9 16.5	0.330 8.3 11.0 14.6
 32		m³/s side	0.161	0.146	0.243	0.221	0.325	0.295	0.405	0.368	0.487	0.443	0.568	0.516		
		throw m	0.75 3.2 0.50 4.3 0.25 7.3	0.146 2.6 3.4 6.4	0.243 5.5 7.3 10.1	0.221 4.4 5.8 8.5	0.325 6.8 9.1 12.2	0.295 5.7 7.6 10.4	0.405 7.8 10.4 14.6	0.368 6.6 8.8 11.9	0.487 8.5 11.3 16.2	0.443 7.8 10.4 14.6	0.568 9.2 12.2 17.1	0.516 8.5 11.3 15.8		



# CMP-A, CMP-ADJ & CMPH

## Product Ordering Key and Suggested Specifications

<b>CMP</b>	<b>-</b>	<b>A</b>	<b>-</b>	<b>1</b>	<b>-</b>	<b>41</b>	<b>-</b>	<b>450x450</b>	<b>-</b>	<b>600x600</b>	<b>-</b>	<b>OBD</b>	<b>-</b>	<b>TRV</b>	<b>-</b>	<b>SRA 300 DIA CH 300 DIA</b>	<b>-</b>	<b>FINISH</b>
Ceiling Multi Pattern		Aluminium		Frame Style		Core Pattern		Duct Size		Module Size		Opposed Blade Damper Attached		Throw Reducing Vanes		Square to Round Adaptor, or Cushion Head		Holyoake White Mill Aluminium Powder Coat

Ceiling Multi Pattern Louver Face diffusers shall be type CMP-A and be all Aluminium construction with removable core, to give the air distribution pattern shown on the drawings. They shall be available with a range of frame styles and purpose made accessories for both throw adjustment and volume control.

All shall be as manufactured by Holyoake.

<b>CMP-ADJ</b>	<b>-</b>	<b>2</b>	<b>-</b>	<b>41</b>	<b>-</b>	<b>225x225</b>	<b>-</b>	<b>600x600</b>	<b>-</b>	<b>OBD</b>	<b>-</b>	<b>TRV</b>	<b>-</b>	<b>SRA 150 DIA CH 150 DIA</b>	<b>-</b>	<b>FINISH</b>
Ceiling Multi Pattern - Adjustable		Frame Style		Core Pattern		Duct Size		Module Size		Opposed Blade Damper Attached		Throw Reducing Vanes		Square to Round Adaptor, or Cushion Head		Holyoake White Mill Aluminium Powder Coat

Ceiling Multi Pattern - Adjustable Louver Face diffusers shall be type CMP-ADJ. They shall be of all Aluminium construction, with removable cores. CMP-ADJ are fitted with vanes which can easily be adjusted to enable vertical, or horizontal throw.

All shall be as manufactured by Holyoake.

<b>CMPH</b>	<b>-</b>	<b>2</b>	<b>-</b>	<b>41</b>	<b>-</b>	<b>300x300</b>	<b>-</b>	<b>600x600</b>	<b>-</b>	<b>OBD</b>	<b>-</b>	<b>TRV</b>	<b>-</b>	<b>SRA 150 DIA CH 150 DIA</b>	<b>-</b>	<b>FINISH</b>
Ceiling Multi Pattern Horizontal		Frame Style		Core Pattern		Duct Size		Module Size		Opposed Blade Damper Attached		Throw Reducing Vanes		Square to Round Adaptor, or Cushion Head		Holyoake White Mill Aluminium Powder Coat

Ceiling Multi Pattern Horizontal Louver Face diffusers shall be type CMPH and be all Aluminium construction with additional horizontal blades. Complete with removable core to give multiple air distribution patterns. They shall be available with a range of frame styles and accessories for both throw adjustment and volume control.

All shall be as manufactured by Holyoake.

**Note: All ceiling diffusers, seismic restraints required, but not supplied.**

# CMPP & CMP - TL

## Product Ordering Key and Suggested Specifications

CMPP	–	1	–	300x300	–	450 x 450	–	OBD	–	SRA 300 DIA CH 300 DIA	–	FINISH
⋮		⋮		⋮		⋮		⋮		⋮		⋮
Ceiling Multi Pattern Plaque		Frame Style		Duct Size		Module Size		Opposed Blade Damper Attached		Square to Round Adaptor, or Cushion Head		Holyoake White Mill Aluminium Powder Coat
<p>Ceiling Multi Pattern - Plaque Louver Face diffusers shall be type CMPP. They shall be of all Aluminium construction, with removeable plaque core. CMPP have a range of frame styles and accessories for installation and volume control.</p> <p>All shall be as manufactured by Holyoake.</p>												

CMP-TL	–	1	–		–	450x450	–		–	SRA 300 DIA CH 300 DIA	–	FINISH
⋮		⋮				⋮				⋮		⋮
Ceiling Multi Pattern - Thermal Low Cost		Frame Style				Neck Size				Square to Round Adaptor, or Cushion Head		Holyoake White Mill Aluminium Powder Coat
<p>Ceiling Multi Pattern - Thermal Low Cost Louver Face diffusers shall be type CMP-TL. They shall be of Aluminium construction, with removeable cores. CMP-TL central cores, are complete with a vertical supply section controlled by a thermally actuated damper. Supply air is diffused horizontally below temperatures of 24°C and vertically with temperatures above 30°C.</p> <p>All shall be as manufactured by Holyoake.</p>												

**Note:** All ceiling diffusers, seismic restraints required, but not supplied.