

Note: Drain position central unless dimensioned otherwise Step Entry SKU: LQ-SOF-LH-ST Level Entry SKU: LQ-SOF-LH-LE 1,560 o/a 1,510 o/a 1,495 16 1,469 1,469 See Waste Channel **Recess Specifications** Upstand Countersunk Upstand 434.5 434.5 to 2 sides to 2 sides Screw Holes 877 To centre line of glazing 877 To centre line of glazing 910 o/a 960 o/a 895 Fall Fall Floor Recess 1530x930x36 434.5 434.5 Glazing Channel Glazing Channel ∳ ক্র∤ 1,477
To centre line of glazing 1,477 To centre line of glazing **Drain Section Edge Section Drain Section Edge Section** 1:80 Slope 1:80 Slope Floor 8mm Toughened Safety Glass Screen 8 18±2 Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens Waterproofing 110 10 □10<sub>1</sub>10□ Flange Upstand Upstand Factory fitted Glazing Channel on side wall on side wall Countersunk Screw Holes \_F<u>loor</u> Level Shower Floor Shower Floor Recess Floor Level Recess Level Depth 16 40 31 ⊳ See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth information under floor information under floor Note: Verify exact shower base dimensions on site

## Screen Options:





For more product information go to:

www.atlantis.co.nz/shop/linea-quattro/sofia-1500x900/

For installation instructions go to:


www.atlantis.co.nz/trade/installation/

## AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness





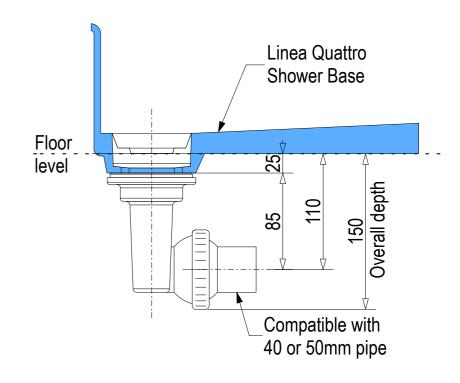

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



