


## 92 Series

Our 92 series accommodates a 92mm stud width, with a single layer of plasterboard each side. It is the preferred choice for larger spans of glazing or when you need to achieve higher acoustic rating, with the wider stud width allowing for more acoustic insulation. When used in conjunction with our Acoustic, Edge & Multilayer ranges you can achieve some of the best STC ratings whilst maintaining the desired look throughout the entire fitout.


- Suited to 92mm stud
- Designed for high stud ceiling heights
- 132mm wide and profile heights of 25mm to 44mm
- Easily accommodates 12.38mm Laminated glass
- Built in screw ports and staking bracket locators
- Negative detail options available
- Seismic head track option available
- Range of options for mullions, transoms & door frames




**Standard Suite Profiles** - Suitable for: 92mm Steel Stud, 13mm Plasterboard incl. Glazing Profiles

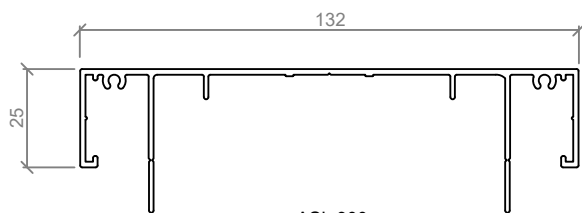


ASL 900  
132mm FLUSH HEADSECTION

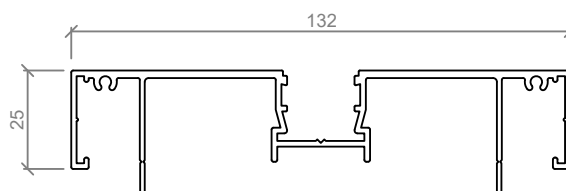


ASL 890  
132mm POCKET HEADSECTION

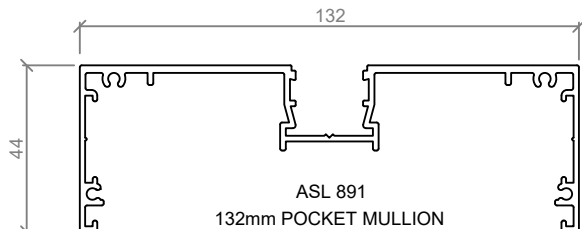


ASL 891  
132mm POCKET MULLION

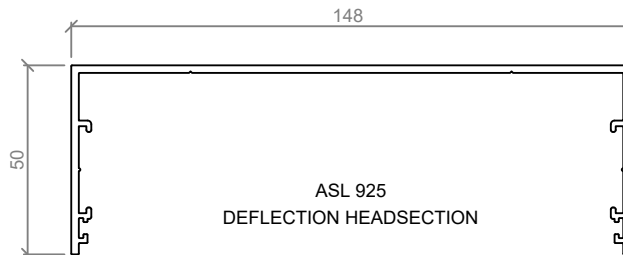


ASL 925  
DEFLECTION HEADSECTION




ASL 898  
FLUSH STARTER CAP

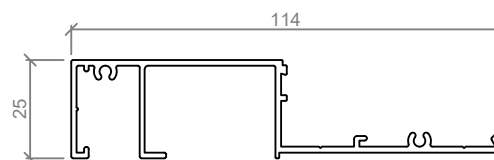


ASL 895  
132mm GLAZING BAR

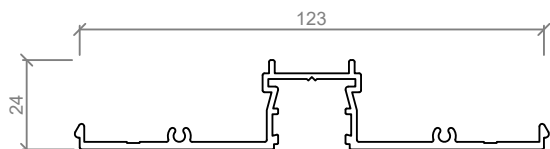


ASL 892  
POCKET STARTER CAP

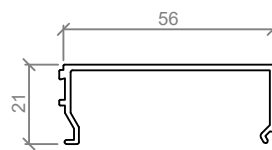


ASL 894  
TRANSOM BEAD

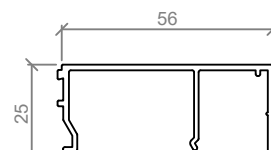


ASL 896  
132mm GLAZING BEAD

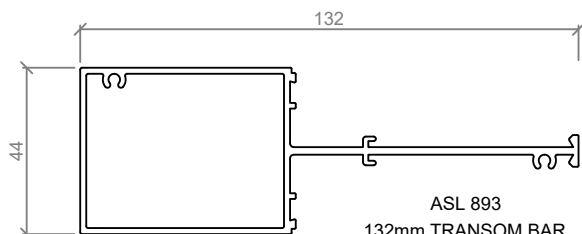


ASL 893  
132mm TRANSOM BAR

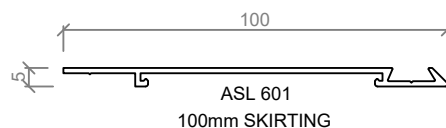


ASL 601  
100mm SKIRTING

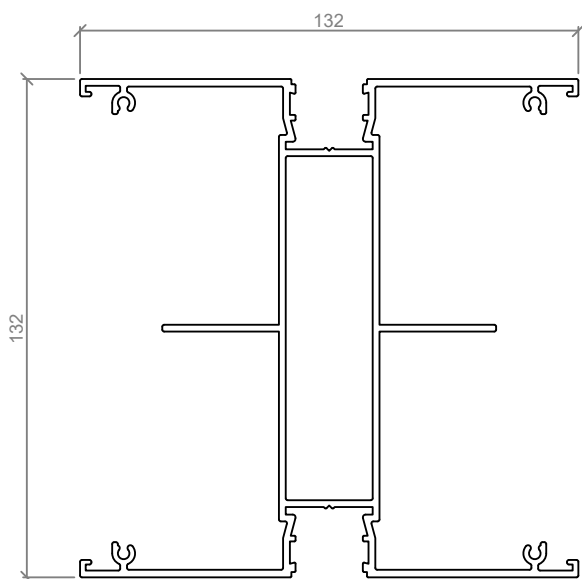


ASL 897  
132mm MULTI POST




ASL 602  
150mm SKIRTING




ASL 903  
ADJUSTABLE DOOR SEAL  
POCKET INFILL CLIP




ASL 904  
ADJUSTABLE DOOR SEAL



ASL 648  
POCKET FLUSH INFILL




ASL 545  
POCKET DOOR STOP  
UP TO 50mm DOOR




ASL 901  
POCKET DOOR STOP  
UP TO 45mm DOOR


**Negative Detail Profiles** - Suitable for: 92mm Steel Stud, 13mm Plasterboard

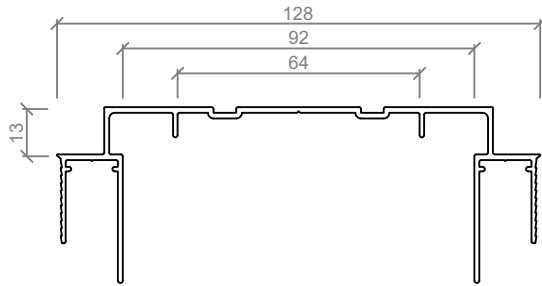

ASL 741  
GROOVED HEADSECTION (13mm NEG. DETAIL)

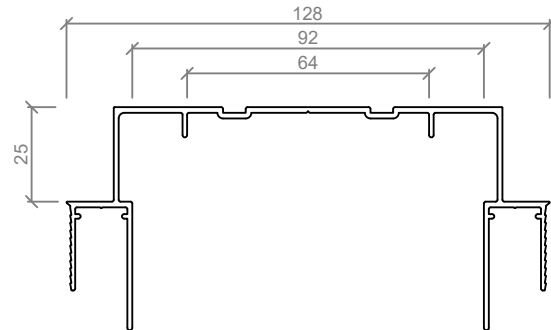


ASL 756  
GROOVED HEADSECTION (25mm NEG. DETAIL)

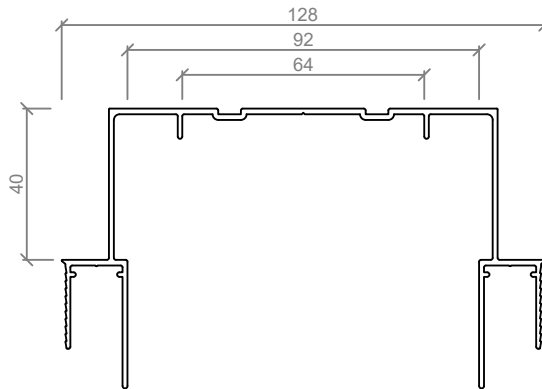


ASL 747  
128mm GROOVED HEADSECTION (40mm NEG. DETAIL)


## Standard Elevation

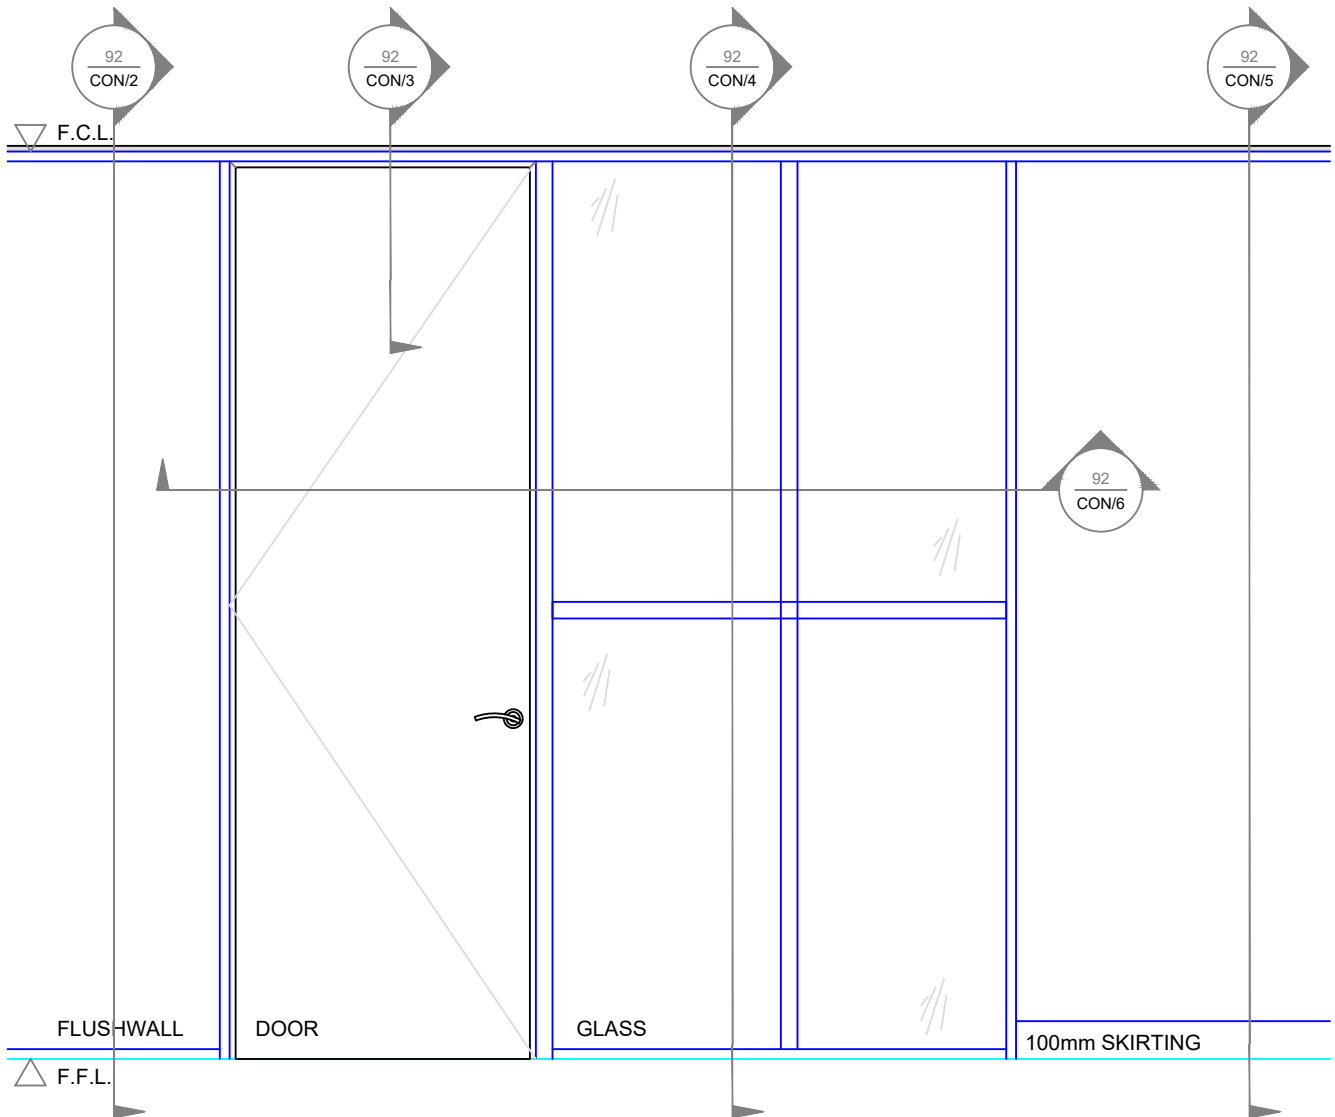


## Standard Details - Headsection Wall with 13mm Plasterboard

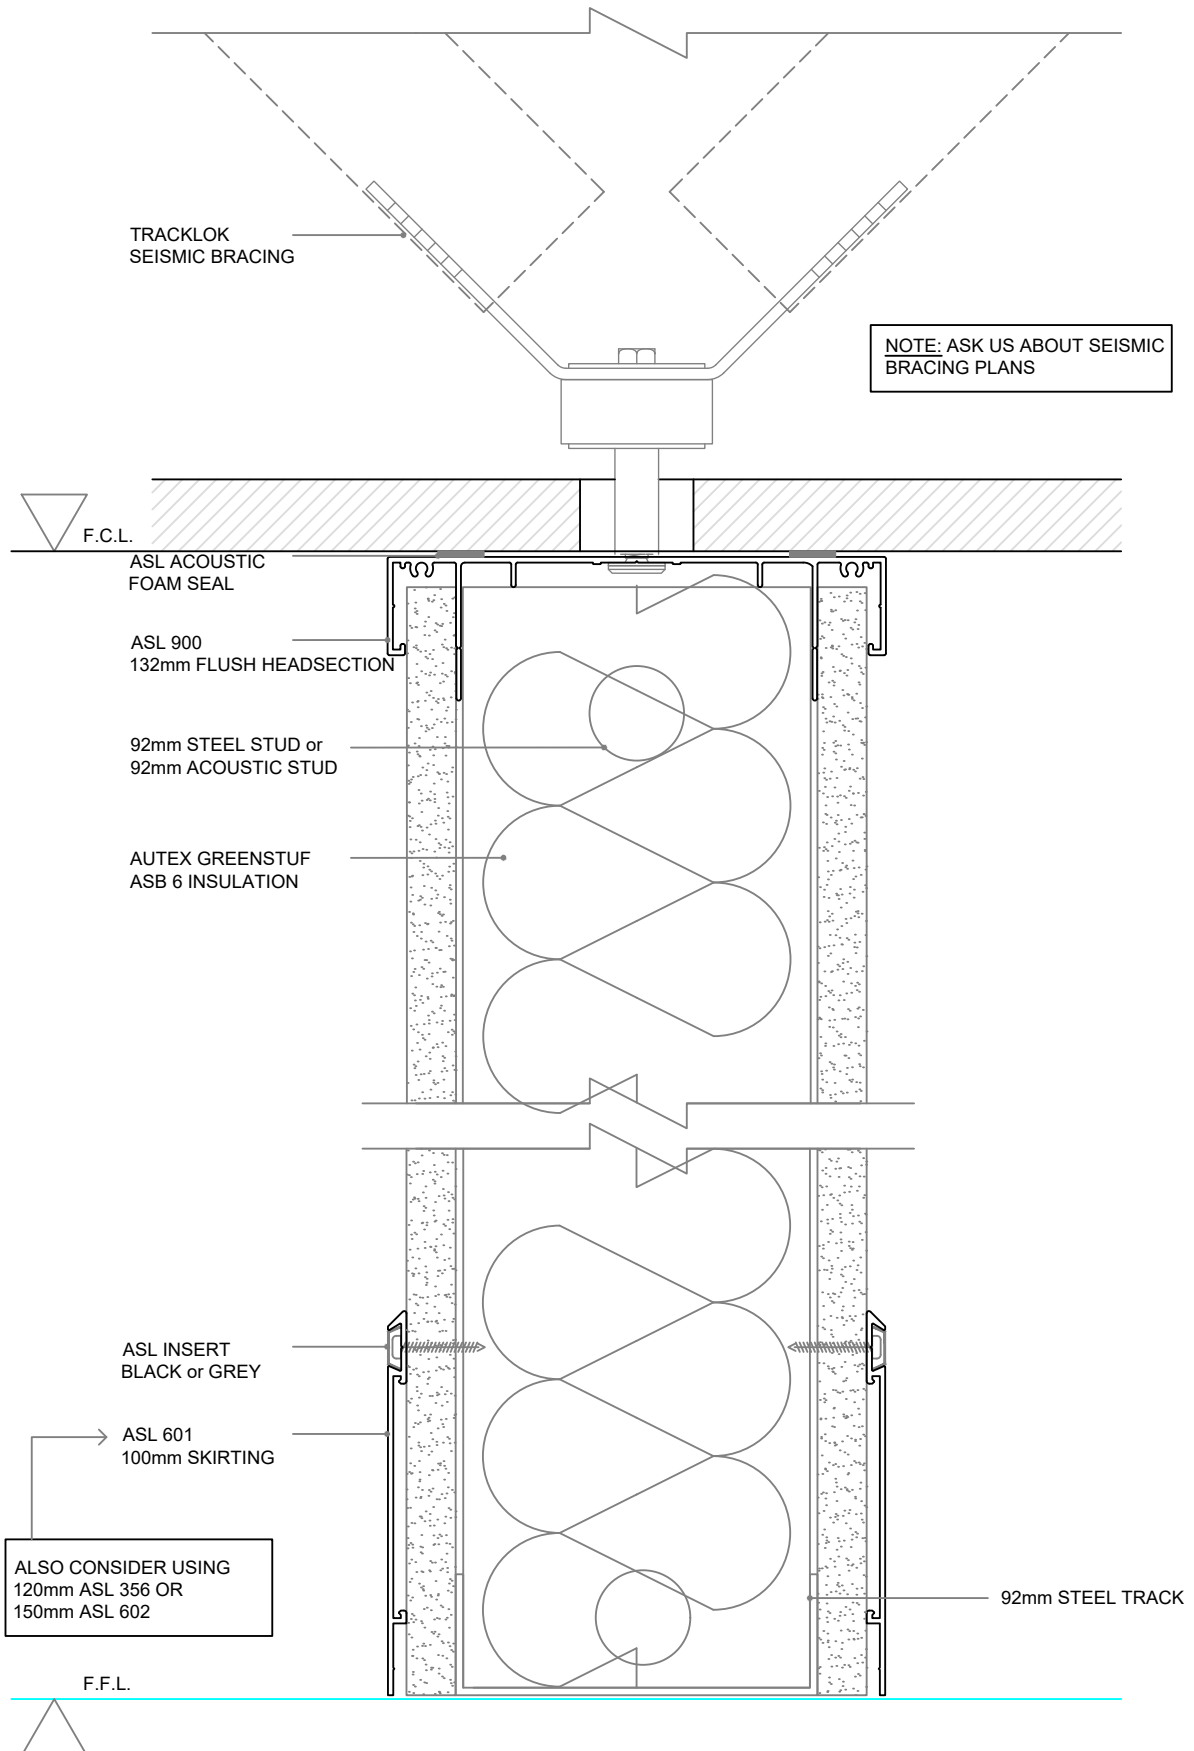


**Negative Details** - Headsection Wall, 13mm Plasterboard with negative detail

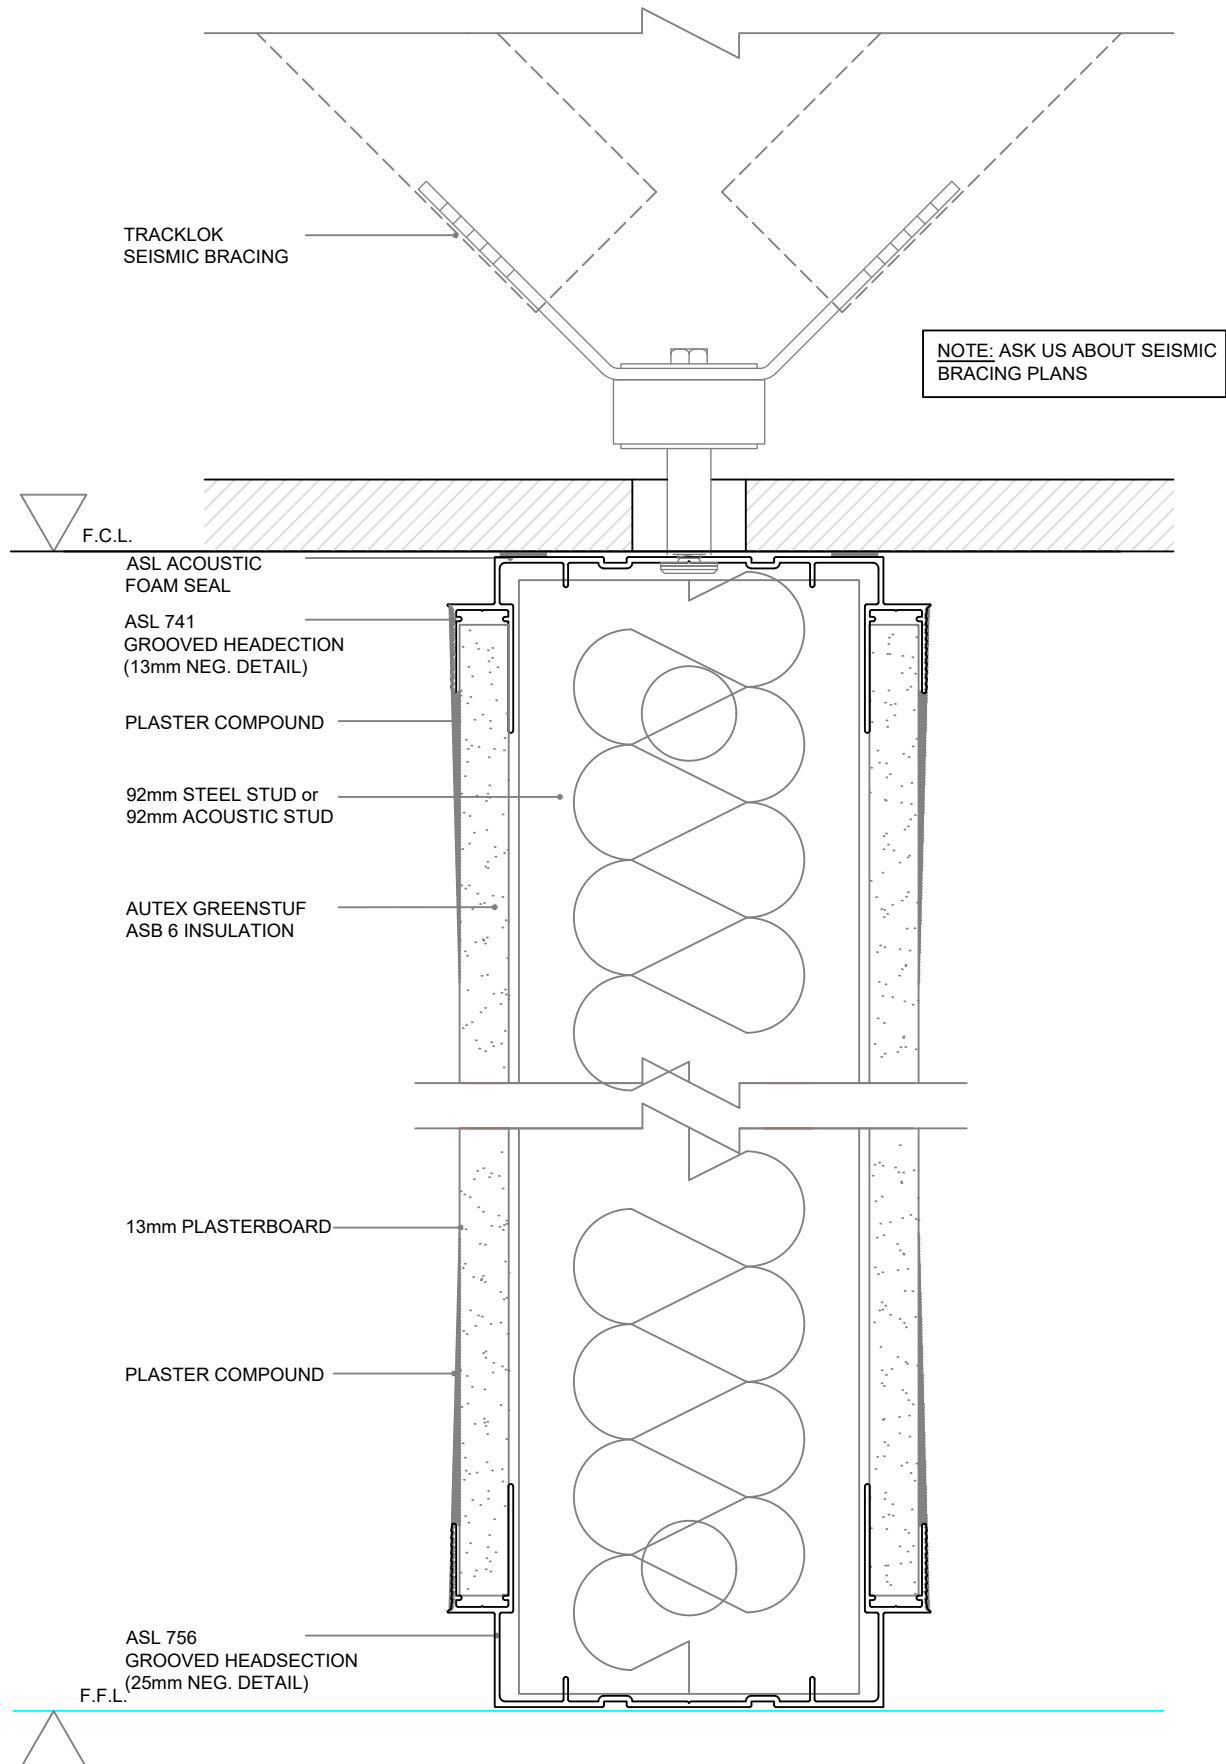

## Standard Details - Full Height Glazing with Transom

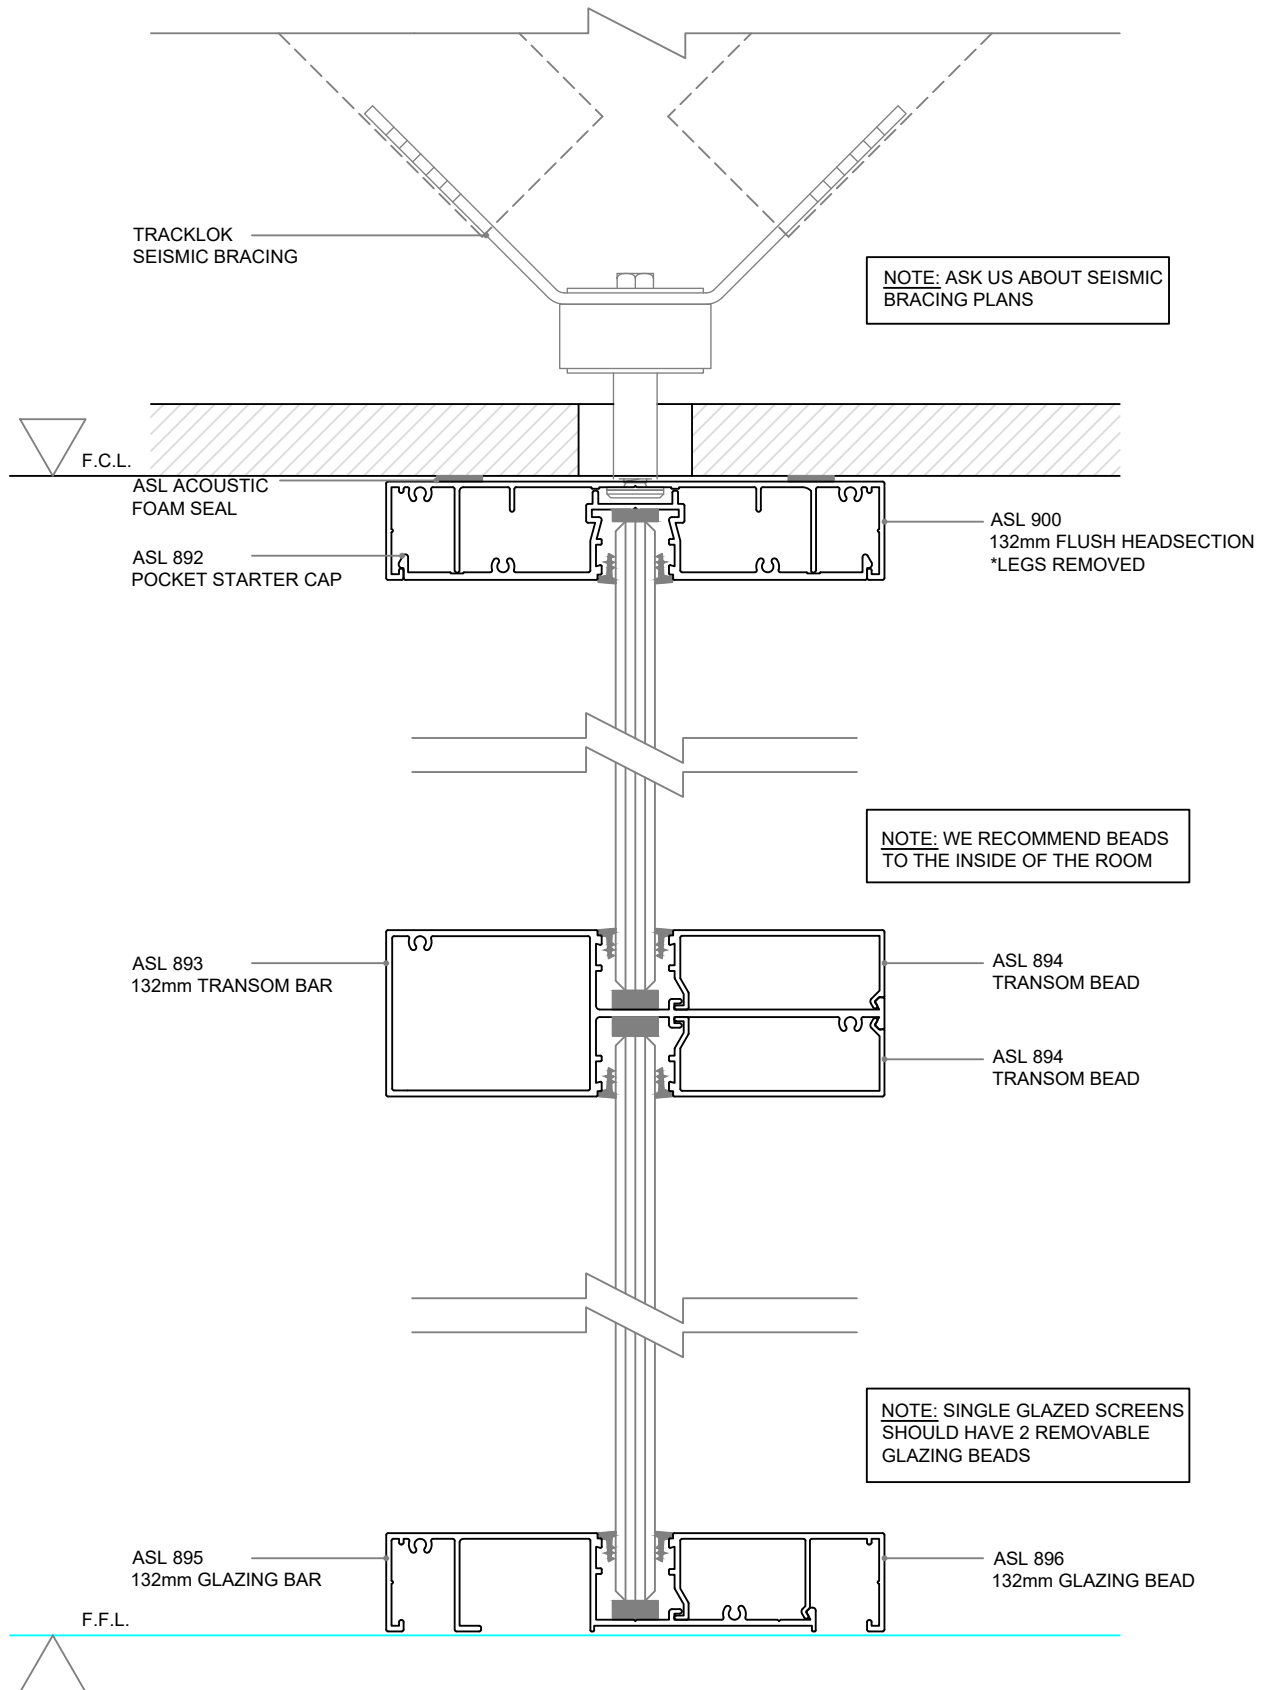


## Standard Details - Door Head

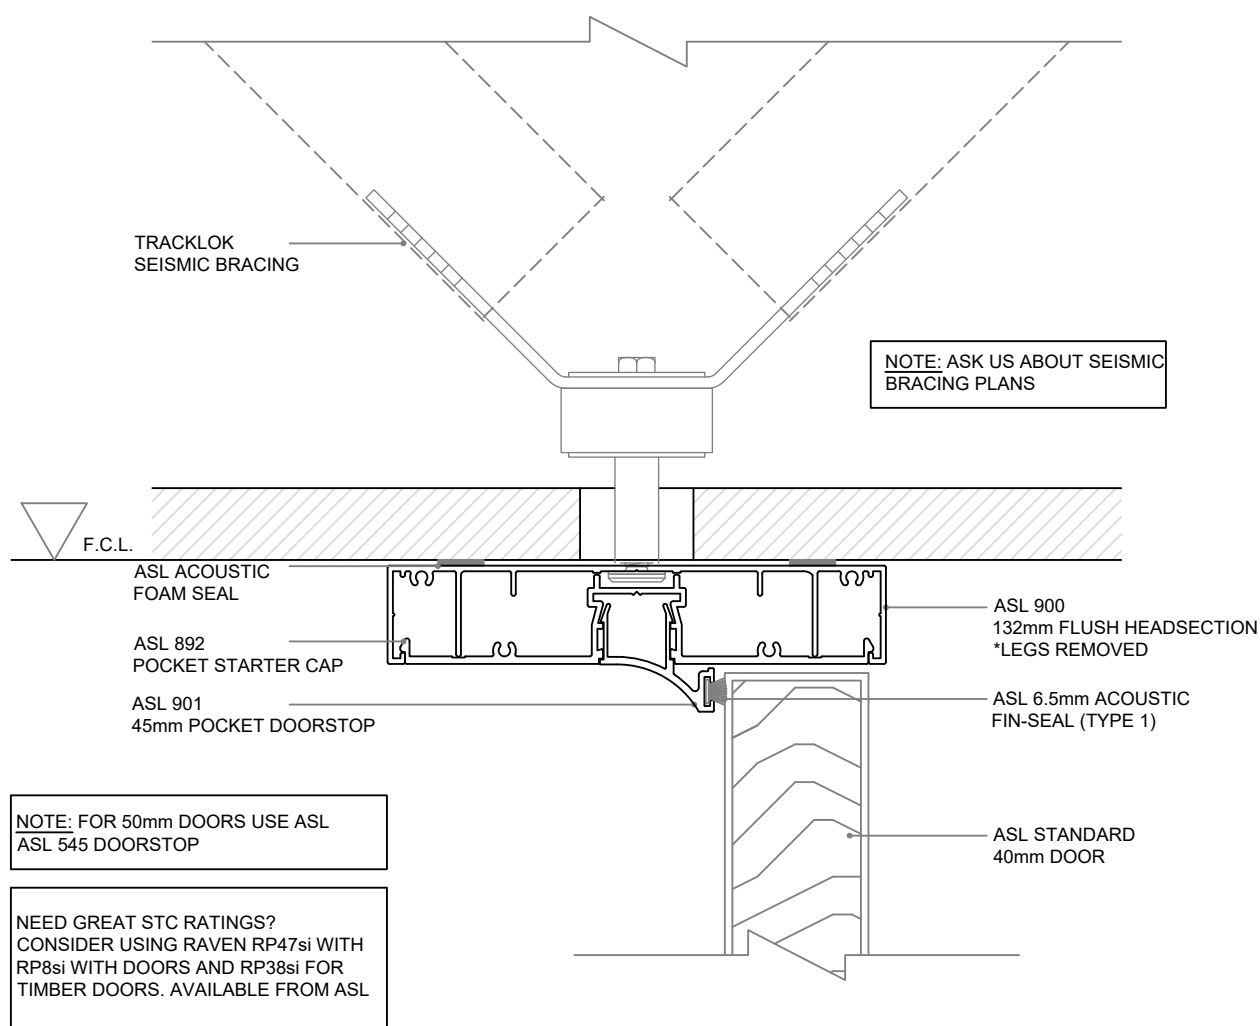





## Standard Details - 92mm Steel Stud, Glazed Wall, Solid Door, 13mm Plasterboard

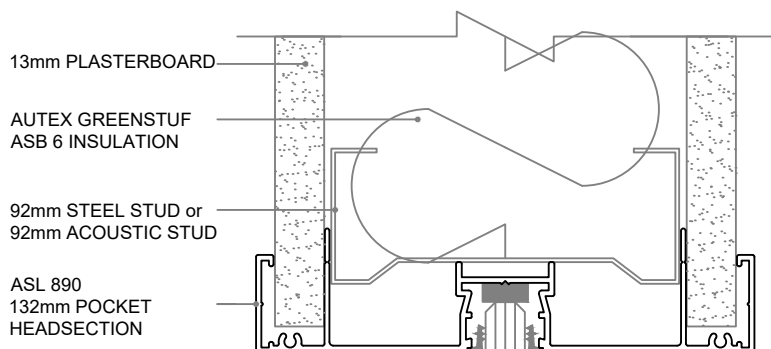

**For Acoustic Door Stop  
[InStop] see page XX**

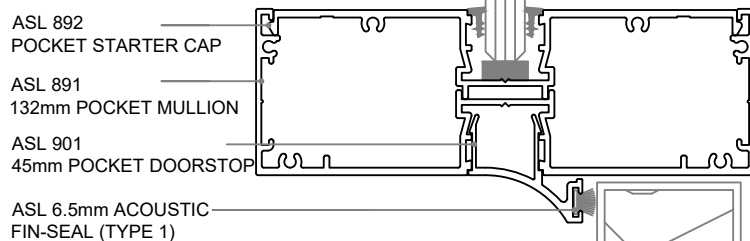

**NOTE: ALTERNATIVE TRANSOM & MULLION  
ALSO DOORSTOP OPTION (UP TO 50mm DOORS)**

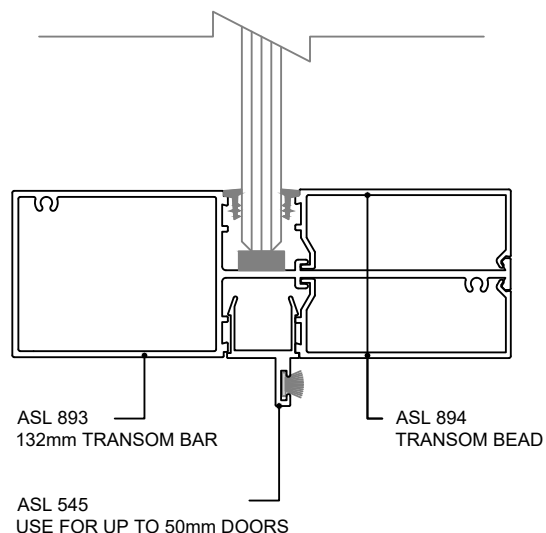

**NOTE: FOR 50mm DOORS USE  
ASL 545 DOORSTOP**

**NOTE: FOR GLAZED SCREENS  
GREATER THAN 1 PANE OF  
GLASS ONLY 1 REMOVABLE BEAD  
IS REQUIRED AT THE FLOOR**

ASL 6.5mm ACOUSTIC  
FIN-SEAL (TYPE 1)

ASL 901  
45mm POCKET DOORSTOP

13mm PLASTERBOARD

AUTEX GREENSTUF  
ASB 6 INSULATION

ASL STANDARD  
40mm DOOR

ASL HD HINGE

ASL 890  
132mm POCKET HEADSECTION

92mm STEEL STUD or  
92mm ACOUSTIC STUD

**NEED GREAT STC RATINGS?  
CONSIDER USING ASL INSTOP  
SYSTEM OR ALTERNATIVELY  
RAVEN RP47si WITH RP8si WITH  
DOORS AND RP38si FOR TIMBER  
DOORS. AVAILABLE FROM ASL**

**Standard Details - Deflection Headsection above Glazed Wall**

