
Note: Drain position central unless dimensioned otherwise Level Entry SKU: LQ-SOF-RH-LE Step Entry SKU: LQ-SOF-RH-ST 1,560 o/a 1,510 o/a 1,495 1,469 1,469 See Waste Channel Recess Specifications Upstand Countersunk Upstand for size 434.5 434.5 to 2 sides 877 To centre line of glazing to 2 sides 877 To centre line of glazing Screw Holes 910 o/a Fall Fall Floor Recess 1530x930x36 434.5 434.5 Glazing Channel Glazing Channel 1,477
To centre line of glazing _10[∆] _10 1,477 To centre line of glazing **Drain Section Edge Section Drain Section Edge Section** 1:80 Slope 1:80 Slope Floor 8mm Toughened Safety Glass Screen 8 18±2 Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens Waterproofing □10₁10□ Flange Upstand Upstand Factory fitted Glazing Channel on side wall on side wall Countersunk Screw Holes _F<u>loor</u> Level

Note: Verify exact shower base dimensions on site

Screen Options:



See Waste Channel Recess


Specifications for depth

information under floor

Shower Floor

Floor Level

31 ⊳



For more product information go to:

www.atlantis.co.nz/shop/linea-quattro/sofia-1500x900/

Recess Level

16

40

Shower Floor

See Waste Channel Recess

Specifications for depth

information under floor

Recess


Depth


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



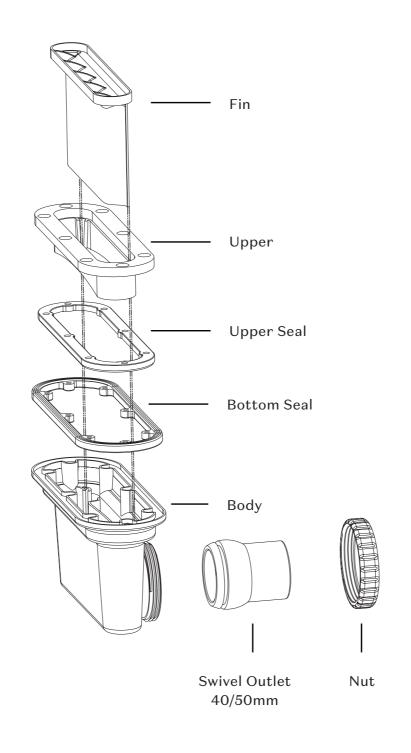

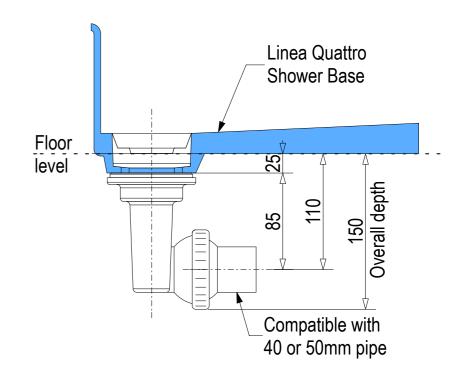

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



