


Level Entry SKU: LQ-RIC-B-LH-LE Step Entry SKU: LQ-RIC-B-LH-ST 1,860 o/a 1,810 o/a 1,795 884.5 884.5 884.5 884.5 16 See Waste Channel 977 To centre line of glazing 977 To centre line of glazing **Recess Specifications** Upstand Upstand Countersunk for size to 2 sides to 2 sides Screw Holes 1,010 o/a 969 1,060 o/a 995 969 Ea 쿌 Floor Recess 1830x1030x30 Glazing Channel Glazing Channel 1,777 1,777
To centre line of glazing To centre line of glazing **Drain Section Edge Section Drain Section Edge Section** 1:80 Slope 1:80 Slope Floor Level Floor Level 8mm Toughened Safety Glass Screen Framing _ 8 <u>1</u>8±2 Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens J10₁10₁ ₂|10_|10_| Waterproofing Upstand Upstand on side wall on side wall Factory fitted Countersunk Glazing Channel Screw Holes Floor Level Shower Floor Shower Floor Floor Level Recess Level Recess 16 40 Depth □ 31 See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth Note: Verify exact shower base dimensions on site information under floor information under floor

Note: Drain position central unless dimensioned otherwise







For more product information go to:

www.atlantis.co.nz/shop/linea-quattro/richmond-1800x1000/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/




AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



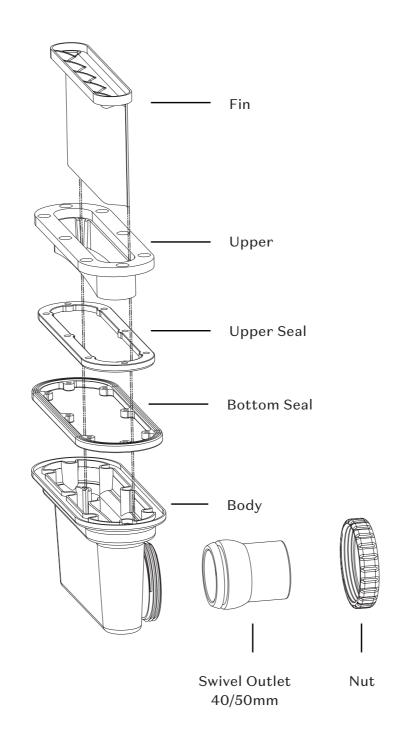

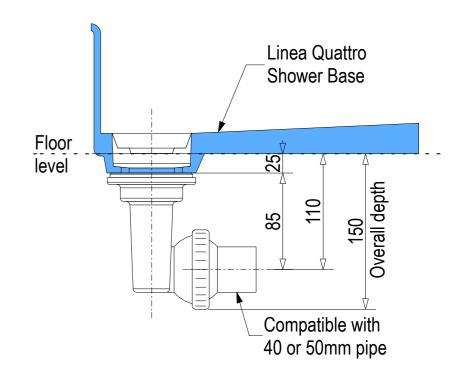

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



