



Note: Drain position central unless dimensioned otherwise Level Entry SKU: LQ-TOL-LH-LE Step Entry SKU: LQ-TOL-LH-ST 1,860 o/a 1,810 o/a 1,795 1,769 1,769 16 See Waste Channel Upstand Upstand Countersunk Recess Specifications 434.5 434.5 to 2 sides to 2 sides Screw Holes 877 To centre line of glazing 877 To centre line of glazing for size 910 o/a Fall Fall Floor Recess 434.5 434.5 1830x930x36 Glazing Channel Glazing Channel 1,777
To centre line of glazing 1,777
To centre line of glazing **Drain Section Drain Section Edge Section** Edge Section 1:80 Slope 1:80 Slope Floor Level 8mm Toughened Safety Glass Screen - Wall Framing Framing 8 18±2 Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens 10 10 10|10 Waterproofing Flange Upstand Upstand Factory fitted on side wall on side wall Countersunk Glazing Channel Screw Holes 22 85 Floor Level Shower Floor Shower Floor Recess Floor Level Recess Level Depth 16 31 ⊳ 40 See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth Note: Verify exact shower base dimensions on site information under floor information under floor

## Screen Options:





For more product information go to:

www.atlantis.co.nz/shop/linea-quattro/toledo-1800x900/

For installation instructions go to:


www.atlantis.co.nz/trade/installation/

## AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness





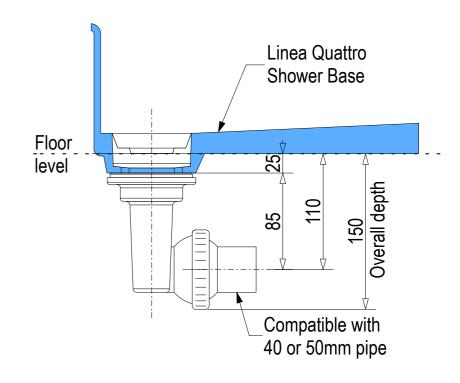

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



