

Spray-on airtightness system



AEROSANA VISCONN

Sprayable airtightness sealant with a humidity-variable s_d value

Attribute	Value
Substance	
Material	Aqueous acrylic dispersion
Colour AEROSANA VISCONN	Dark blue, when fully dry dark blue/black
Colour AEROSANA VISCONN white	white, when fully dry white
Coating application	0.2 – 1.0 mm wet film
s_d -value (g-value)/humidity variable	6 ±0.6 m (30 ±3 MNs/g) (at 0.3 mm thickness) / 0.13–10.00 m (0.65–50 MNs/g)
Can be plastered / painted over	yes and pro clima adhesive tapes can be stuck onto it
Application temperature	5 °C to +35 °C ; 41 °F to 95 °F
Temperature resistance	permanent -40 °C to 90 °C ; -40 °F to 194 °F (dried)
Coverage	approx. 750 g/m ² , depending on applied thickness



NEW

AEROSANA VISCONN FIBRE

Fibre-reinforced brush-on sealant with a humidity-variable s_d value

Attribute	Value
Substance	
Material	Aqueous acrylic dispersion, fibre-reinforced
Colour	dark blue, when fully dry black
Coating application	0.6 – 1.4 mm wet film
s_d -value (g-value)/humidity variable	3.5 ±0.4 m (17.5 ±2 MNs/g) (at 0.3 mm thickness) / 0.15–5.00 m (0.75–25 MNs/g)
Can be plastered / painted over	yes, and pro clima adhesive tapes can be stuck onto it
Application temperature	5 °C to 35 °C ; 41 °F to 95 °F
Temperature resistance	permanent -40 °C to 90 °C ; -40 °F to 194 °F (dried)
Coverage	400–800 g/m ² , depending on subsurface and applied thickness



NEW

AEROSANA FLEECE

Fleece within the AEROSANA VISCONN system for covering cracks or joints

Attribute	Value
Substance	
Material	PET
Surface weight	63 ±10 g/m ²
Thickness	0.7 ±0.15 mm
Tensile strength MD/CD	90 ±15 N/5 cm / 145 ±15 N/5 cm
Elongation MD/CD	75 ±15 % / 90 ±15 %

Forms of delivery

Product	Art.-No.	GTIN	Forms of delivery	Content	Coverage	piece / Pal.
AEROSANA VISCONN	1AR01106	4026639211064	Bucket	10 Liter	750 g/m ²	45
AEROSANA VISCONN white	1AR01740	4026639217400	Bucket	10 Liter	750 g/m ²	45
AEROSANA VISCONN FIBRE	1AR01677	4026639216779	Bucket	5 Liter	600 g/m ²	44
			Length	Width	Content	UE
AEROSANA FLEECE	1AR01715	4026639217158	2 x 25 m	15 cm	7,5 m ²	2

Technical support
+49 (0) 62 02 - 27 82 45, technic@proclima.com

www.proclima.com

MOLL
bauökologische Produkte GmbH
Rheintalstraße 35–43
D-68723 Schwetzingen
Germany
Tel.: +49 (0) 62 02 - 27 82.0
info@proclima.com



Spraying instead of sticking: Quick and easy airtightness

AEROSANA VISCONN

- ✓ Simply spray it on: extremely quick application
- ✓ Particularly on transitions and detail features with lots of edges and corners
- ✓ Reliable in the case of relative motion between building components: remains permanently elastic
- ✓ Sticks to all standard construction surfaces, can also be used as a bonding course
- ✓ Can be plastered, painted and stuck over

AEROSANA VISCONN FIBRE

- ✓ Covers cracks and joints of up to 20 mm width
- ✓ No mixing necessary: ready-to-use, apply straight from the bucket

AEROSANA FLEECE



Tested for harmful substances in accordance with
AgBB
Based on the criteria of the Committee for Health-Related Evaluation of Construction Products at the German Federal Environment Agency




Ensure that airtightness doesn't become an ordeal!

NEW
with fibre reinforcement

Everything. Sealed. Quicker.

Timber and masonry structures · Surfaces and detail features · New buildings and refurbishment · Interior and exterior use

AEROSANA® VISCONN – system

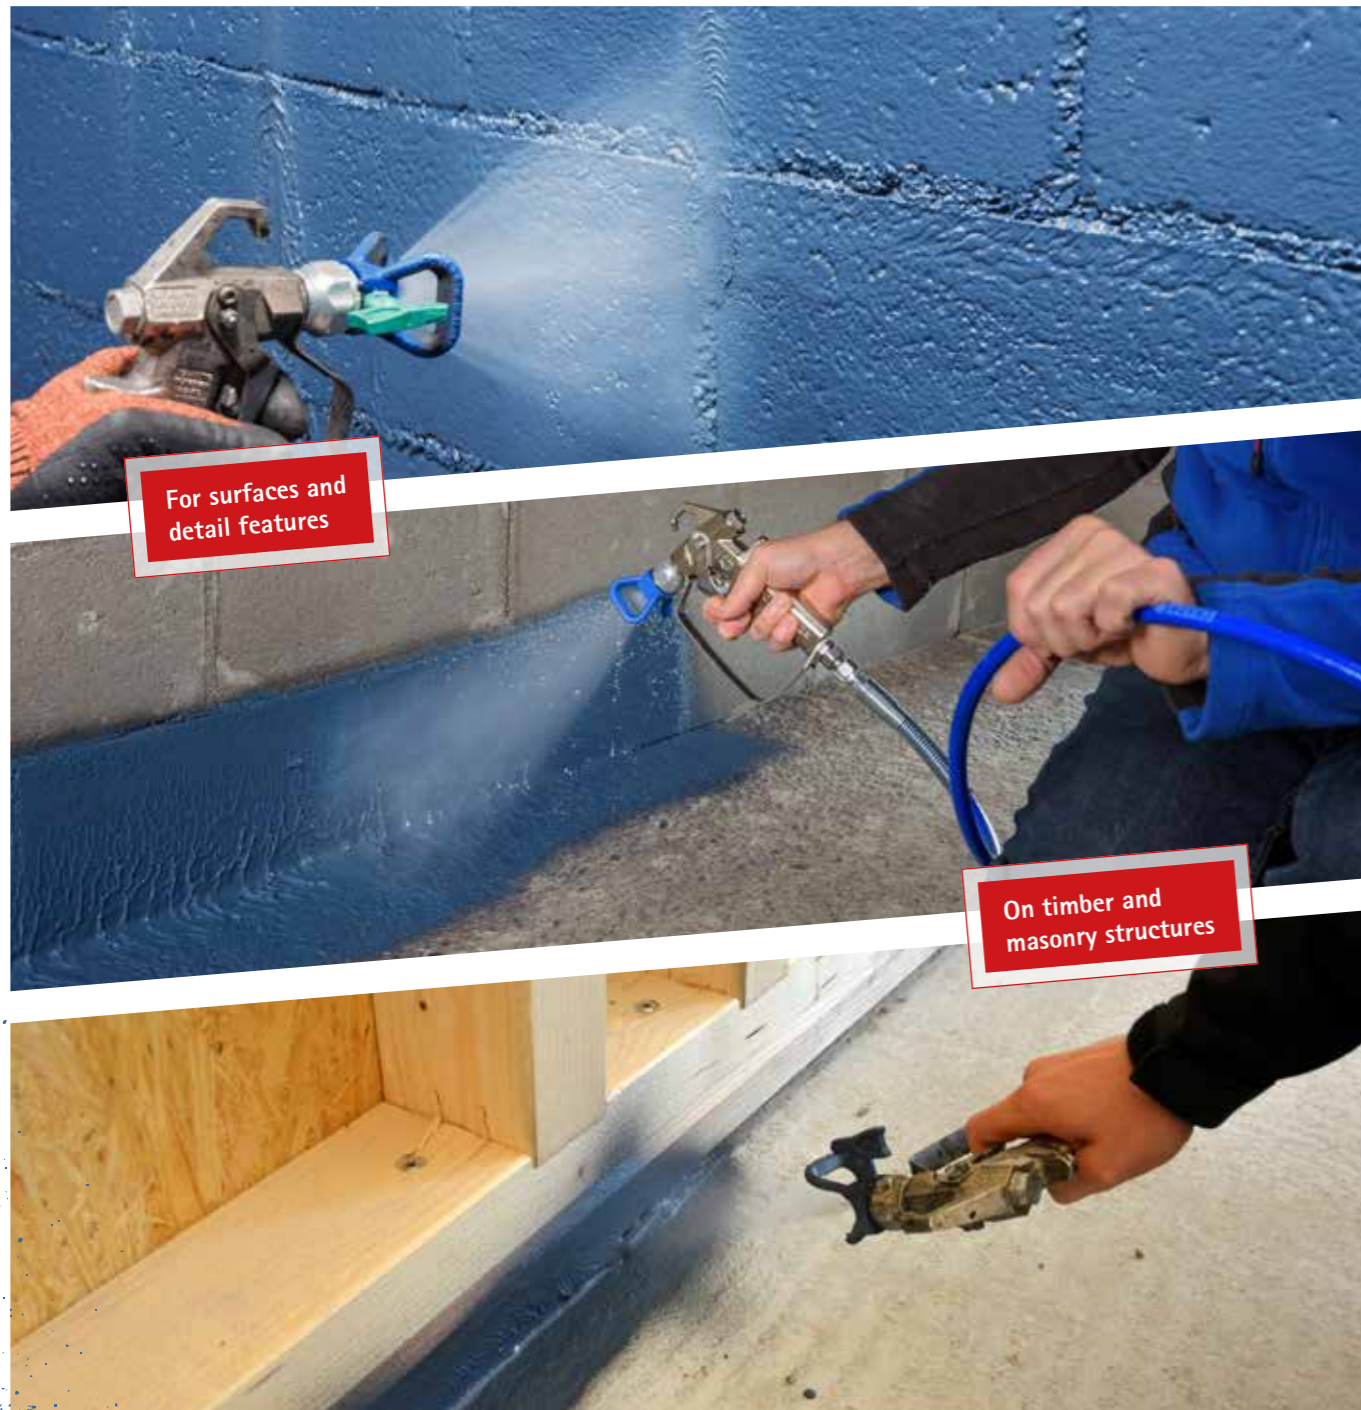

For surfaces and detail features


On timber and masonry structures

With the humidity-variable AEROSANA VISCONN spray-on or brush-on airtightness seal, you can work extremely quickly – whether on surfaces such as non-plastered masonry or porous panel-form materials, or when creating joints between components on timber and masonry structures.




For sealing transitions between components

Transitions between components with different materials and with lots of edges and corners – simply spray on AEROSANA VISCONN and everything is sealed!

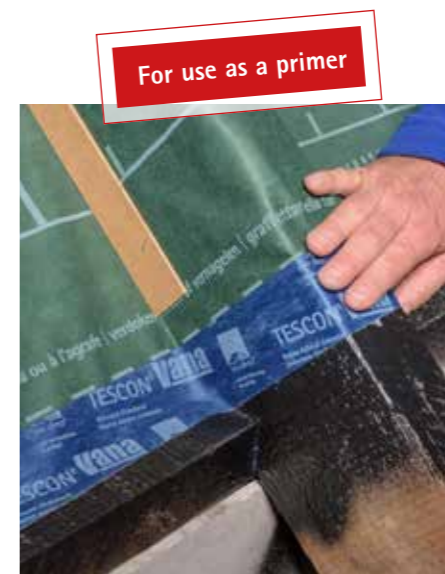

For use as a primer

Subsurfaces can also be strengthened – on renovation projects, for example. AEROSANA VISCONN has a humidity-variable diffusion resistance and can therefore be used on either the inside or outside of building components.

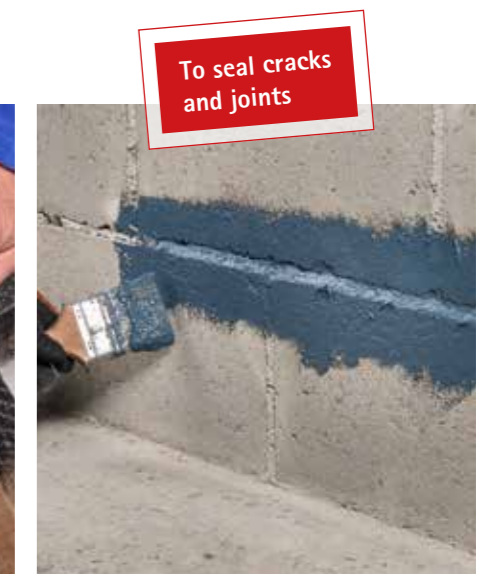


To seal cracks and joints

With the new, fibre-reinforced AEROSANA VISCONN FIBRE, you can simply paint over joints and cracks of up to 20 mm width.



To seal penetrations

In the case of larger joints or holes or when sealing penetrations such as pipes or ties, simply insert the new AEROSANA FLEECE and paint over it.

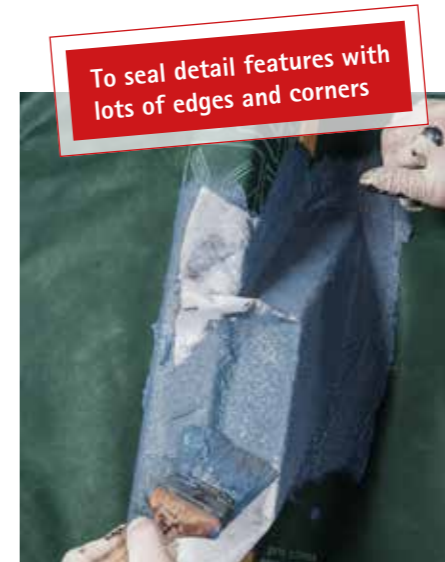

To seal detail features with lots of edges and corners



Further information on the AEROSANA VISCONN system can be found at:

procli.ma/en-int-aerosana-visconn



SCAN IT

Watch the video

AEROSANA VISCONN is extremely versatile!

youtu.be/6ZCzwf04A-0



SCAN IT

