



## HEAD

FIXINGS 150 FROM CORNERS AND 450 CENTRES  
 TEMPORARY FLAT PACKERS REMOVED FROM HEAD AFTER FIXING  
 WATER RESISTANT AIRSEAL ON PEF ROD

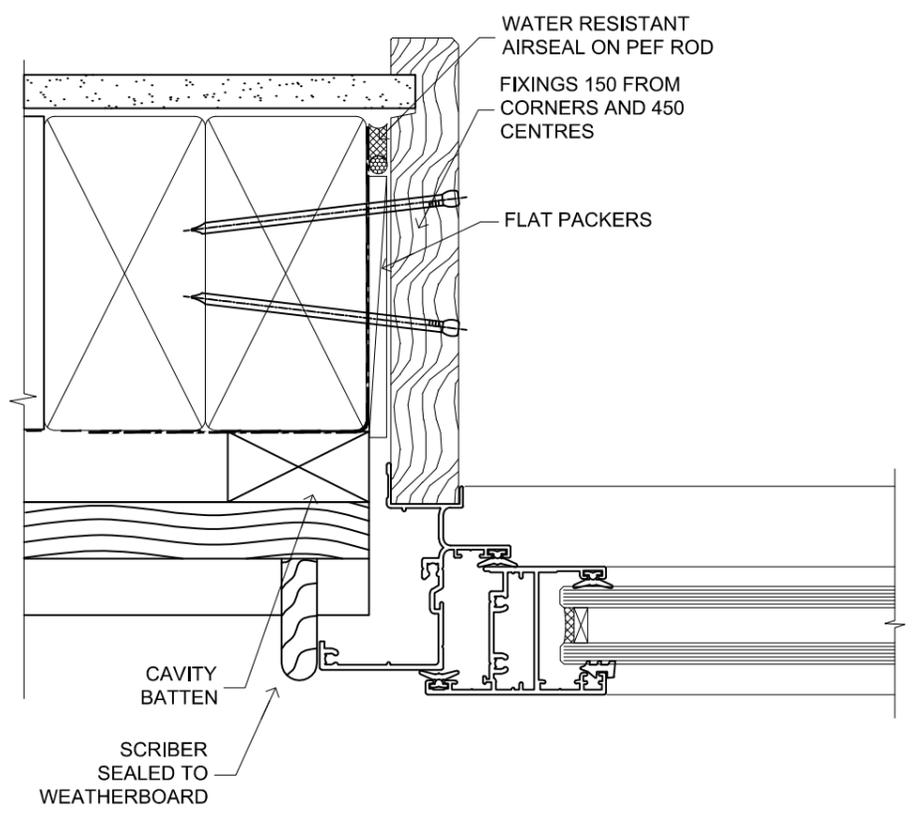

## SILL

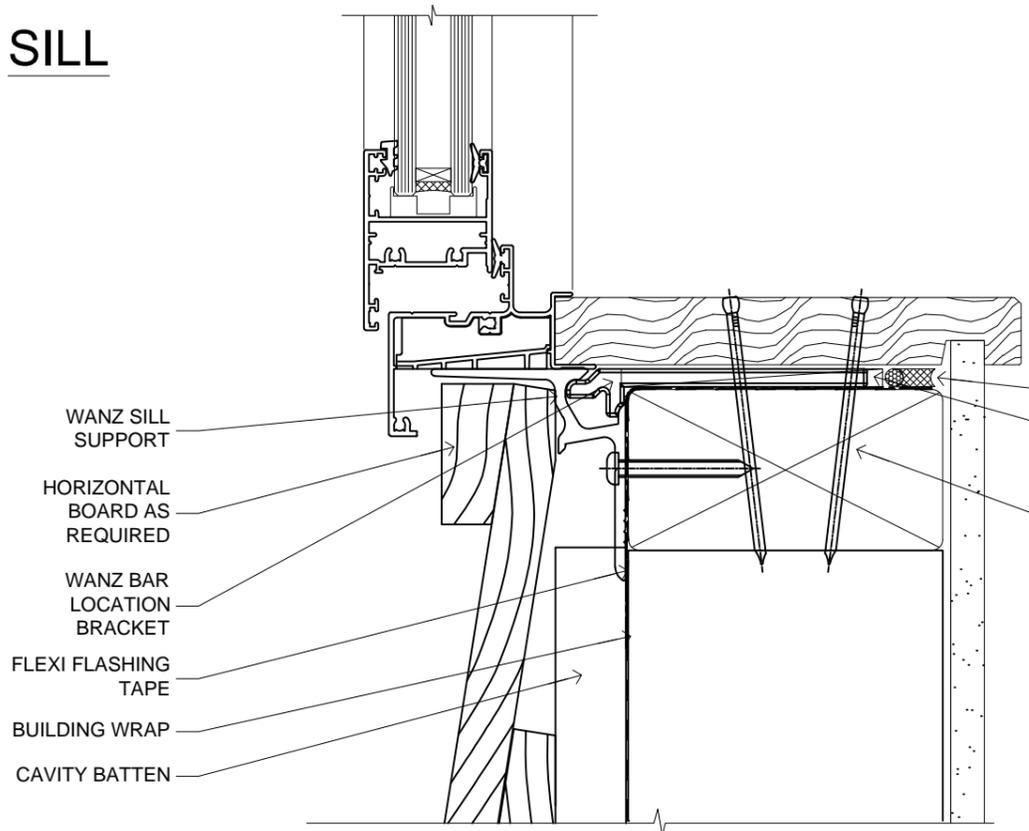

## JAMB


WATER RESISTANT AIRSEAL ON PEF ROD  
 FLAT PACKERS  
 FIXINGS: PAIRS OF 75x3.15mm NAILS OR 1 X 8g 65MM SS SCREWS AT 150 FROM CORNERS AND 450 CENTRES

## WINDOW


FAIRVIEW SYSTEMS LIMITED SPECIFIERS GUIDE 2014 © TECHNICAL SPECIFICATIONS & PROFILE DETAILS SUBJECT TO CHANGE WITHOUT NOTICE

# ARCHITECTURAL LINEAR 35, CAVITY CONSTRUCTION, BEVEL BACK WEATHERBOARD DETAILS


DATE 01.12.2014	SCALE 1:1
REF. AL35 BBW CC 01	

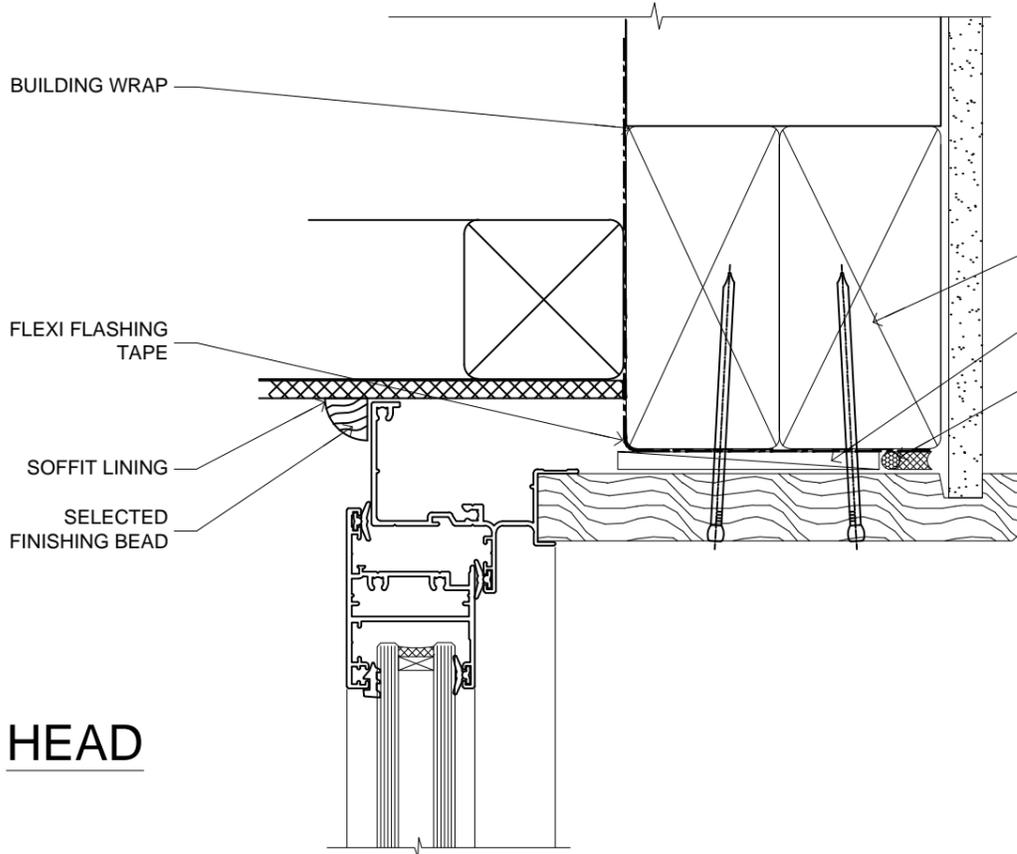

## HEAD

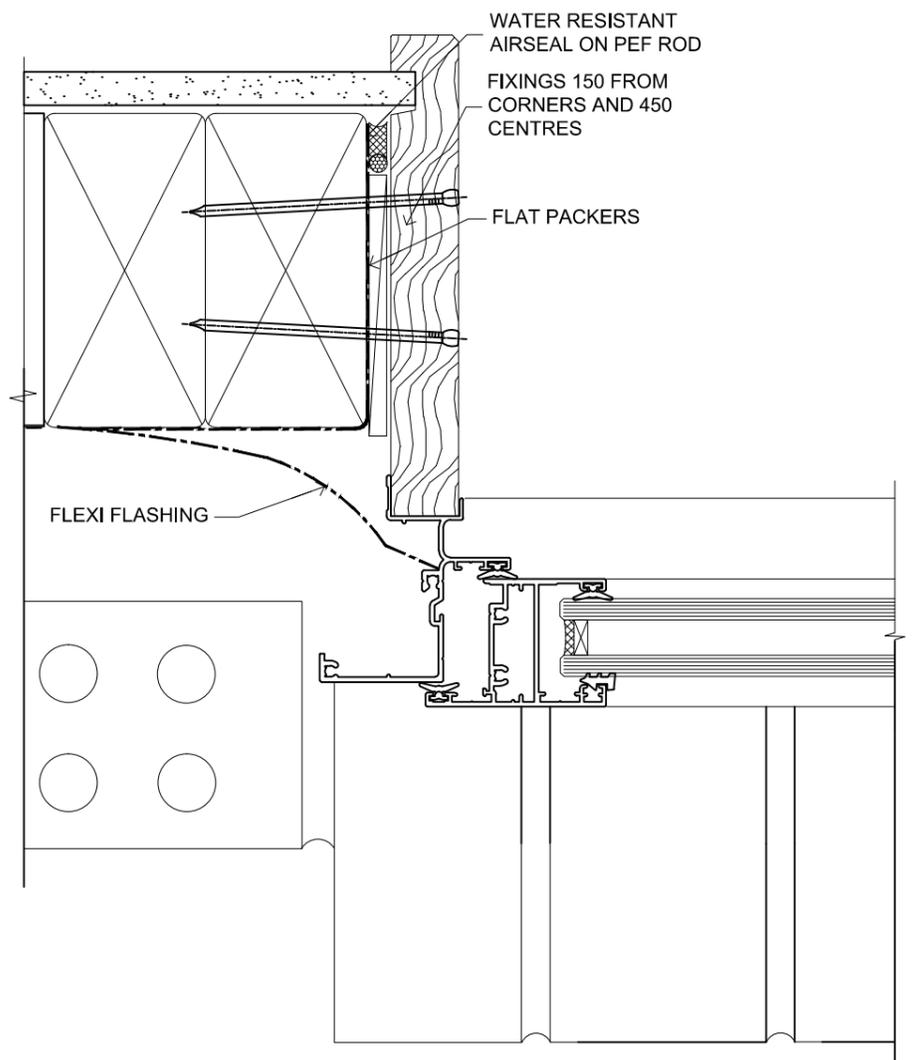

## JAMB

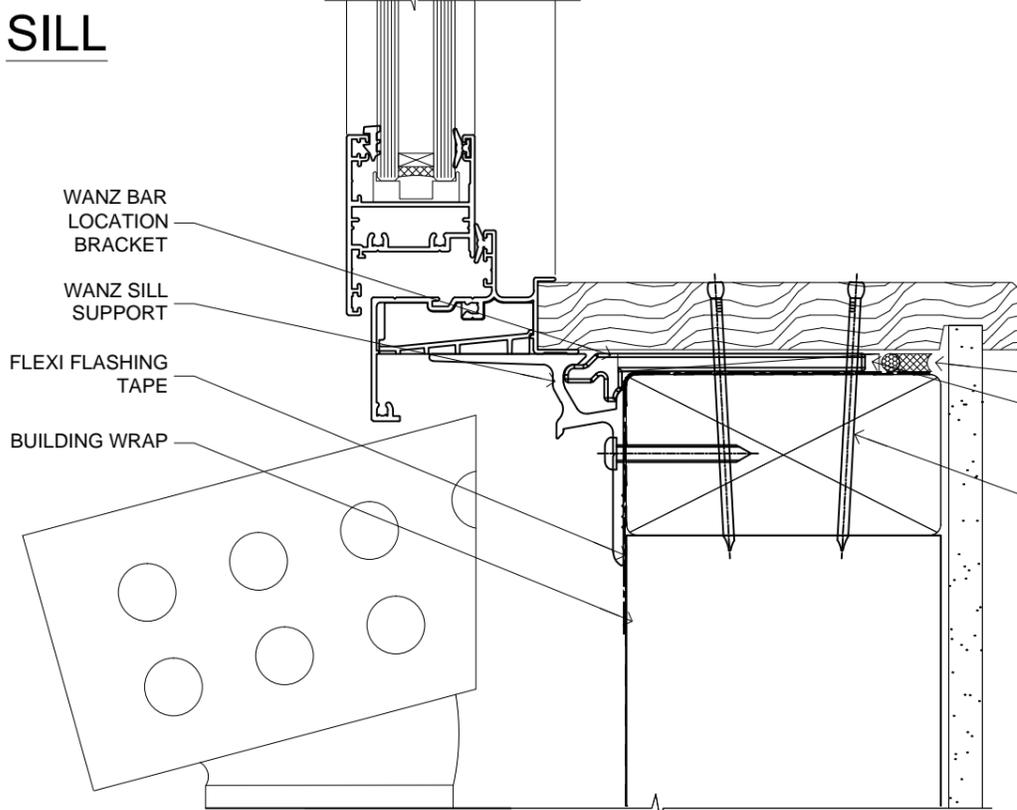

## SILL

## WINDOW


FAIRVIEW SYSTEMS LIMITED SPECIFIERS GUIDE 2014 © TECHNICAL SPECIFICATIONS & PROFILE DETAILS SUBJECT TO CHANGE WITHOUT NOTICE

ARCHITECTURAL LINEAR 35, CAVITY CONSTRUCTION,  
BRICK VENEER DETAILS


DATE  
01.12.2014

SCALE  
1:1


REF. AL35 BV CC 01

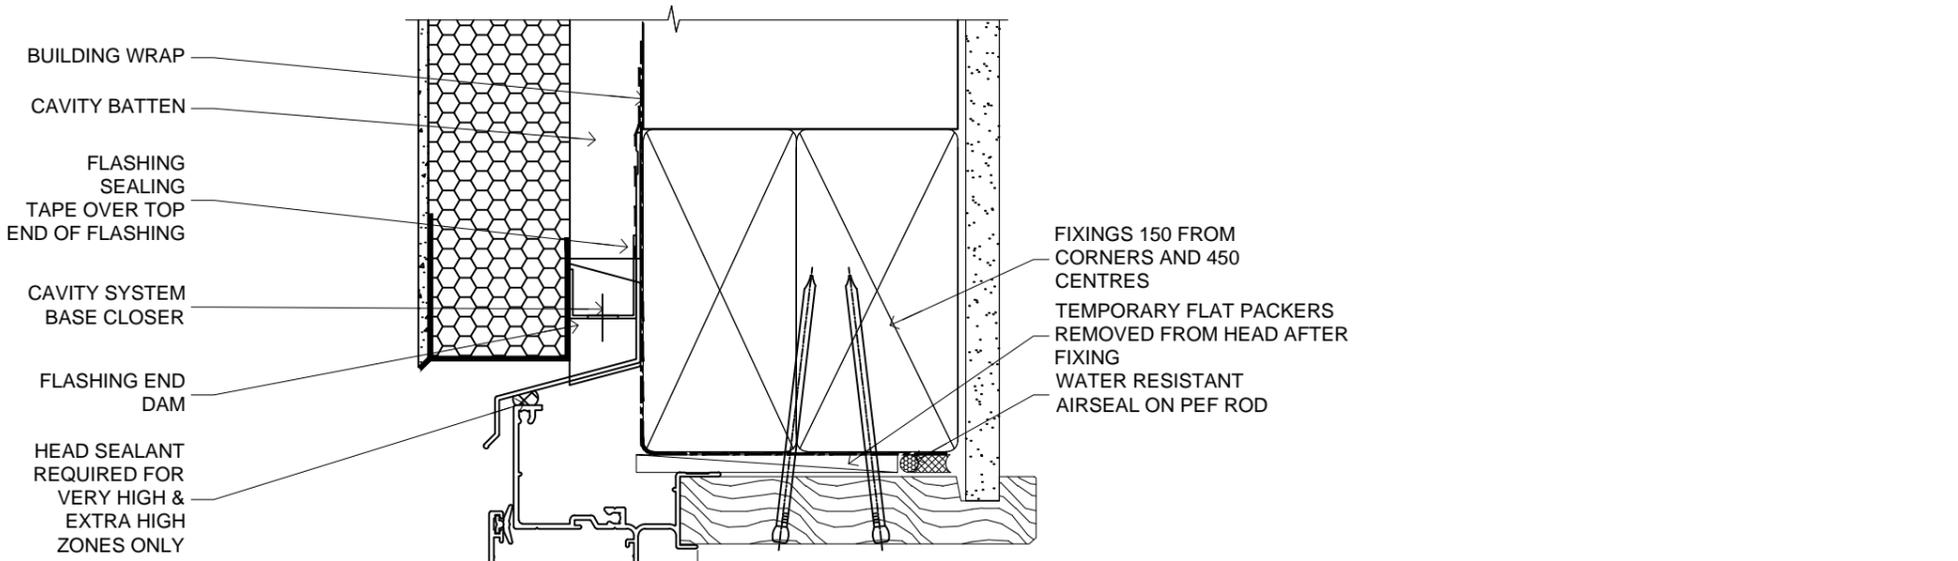

## HEAD

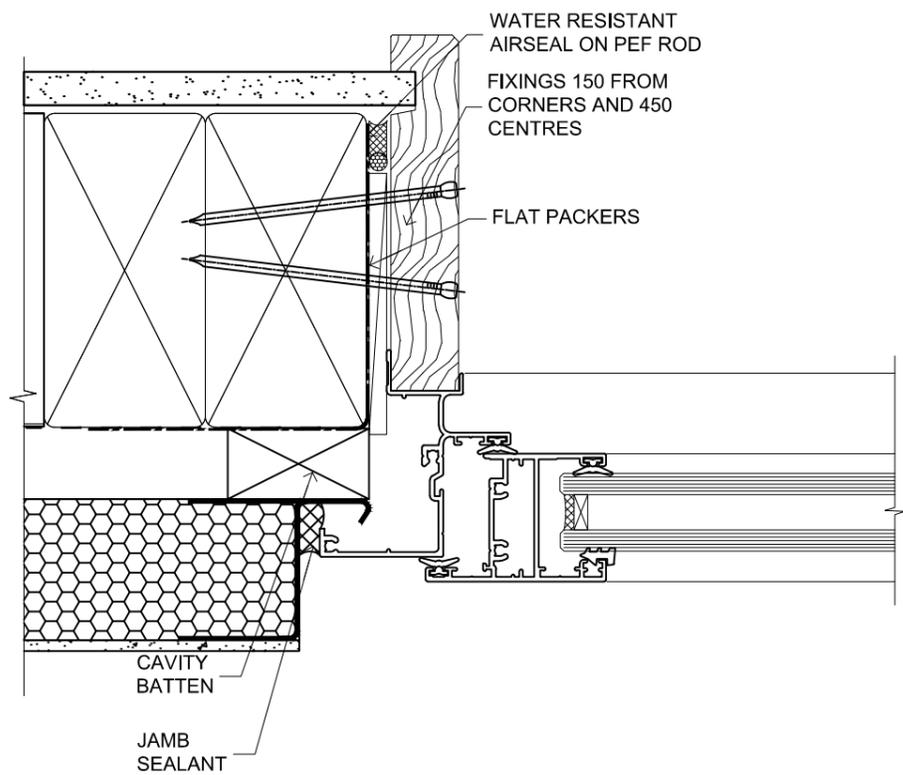

## SILL

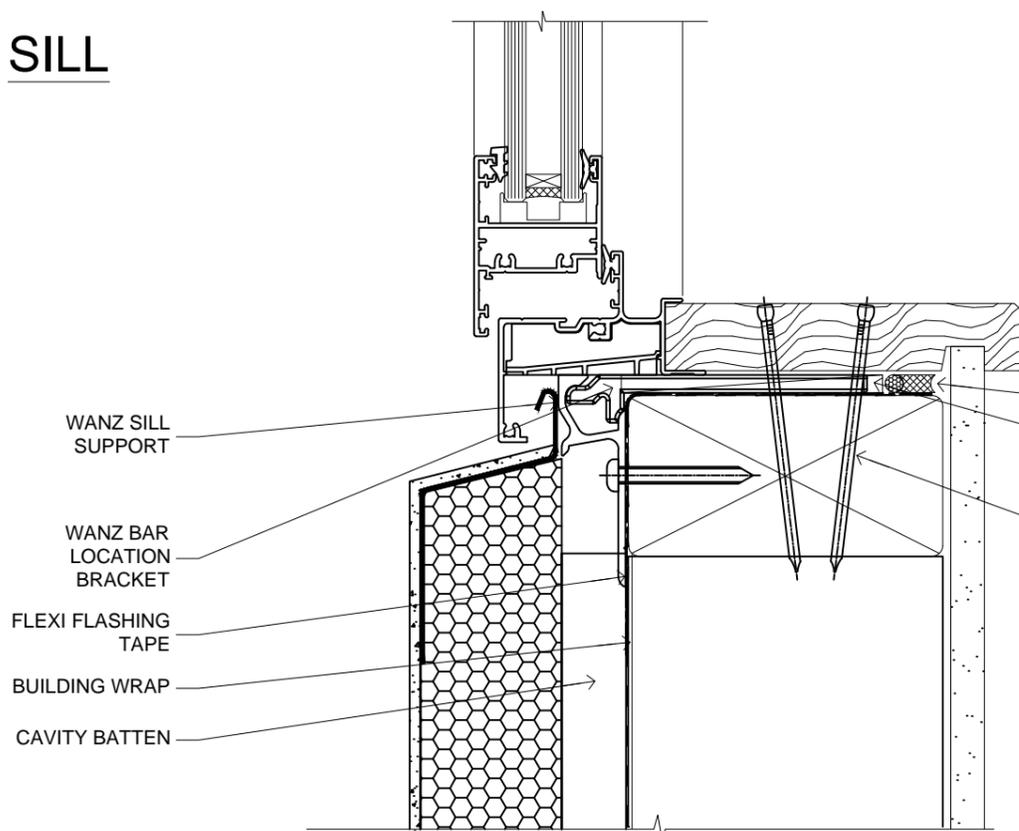

## JAMB


WATER RESISTANT AIRSEAL ON PEF ROD  
 FLAT PACKERS  
 FIXINGS: PAIRS OF 75x3.15mm NAILS OR 1 X 8g 65MM SS SCREWS AT 150 FROM CORNERS AND 450 CENTRES

## WINDOW

FAIRVIEW SYSTEMS LIMITED SPECIFIERS GUIDE 2014 © TECHNICAL SPECIFICATIONS & PROFILE DETAILS SUBJECT TO CHANGE WITHOUT NOTICE


ARCHITECTURAL LINEAR 35, CAVITY CONSTRUCTION,  
 EIFS RECESSED DETAILS

DATE 01.12.2014	SCALE 1:1
REF. AL35 EIFS CC 01	

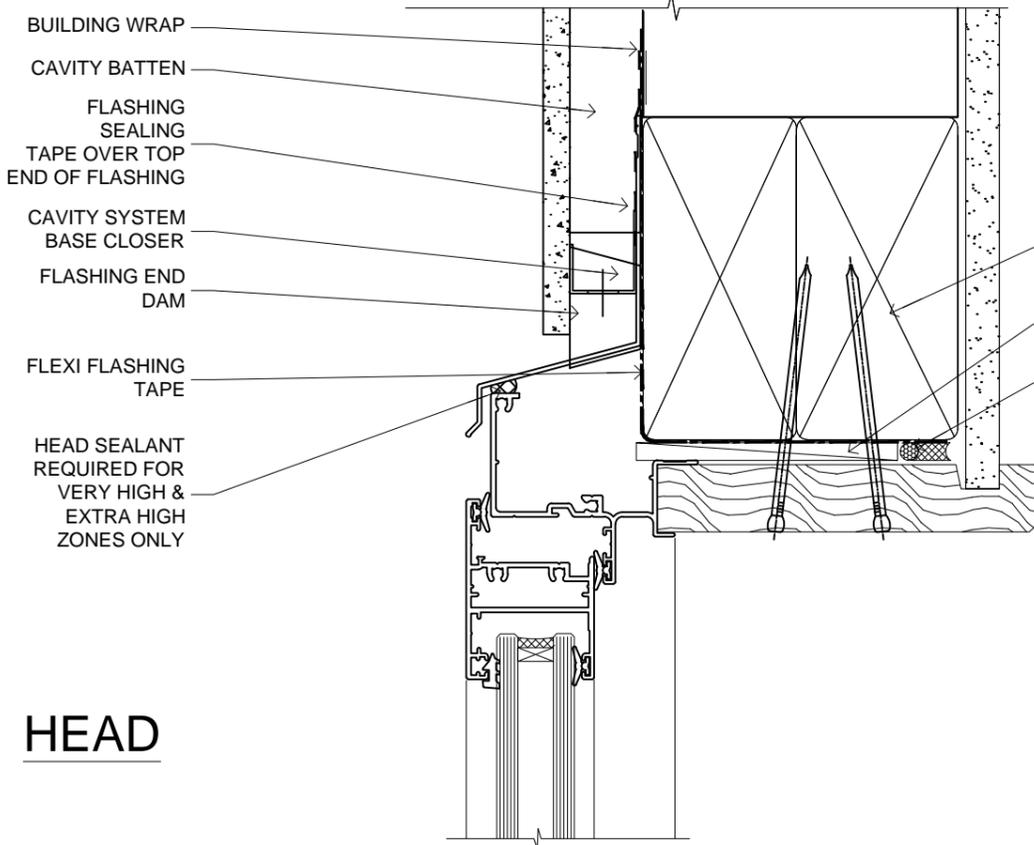


## HEAD

FIXINGS 150 FROM CORNERS AND 450 CENTRES  
 TEMPORARY FLAT PACKERS REMOVED FROM HEAD AFTER FIXING  
 WATER RESISTANT AIRSEAL ON PEF ROD

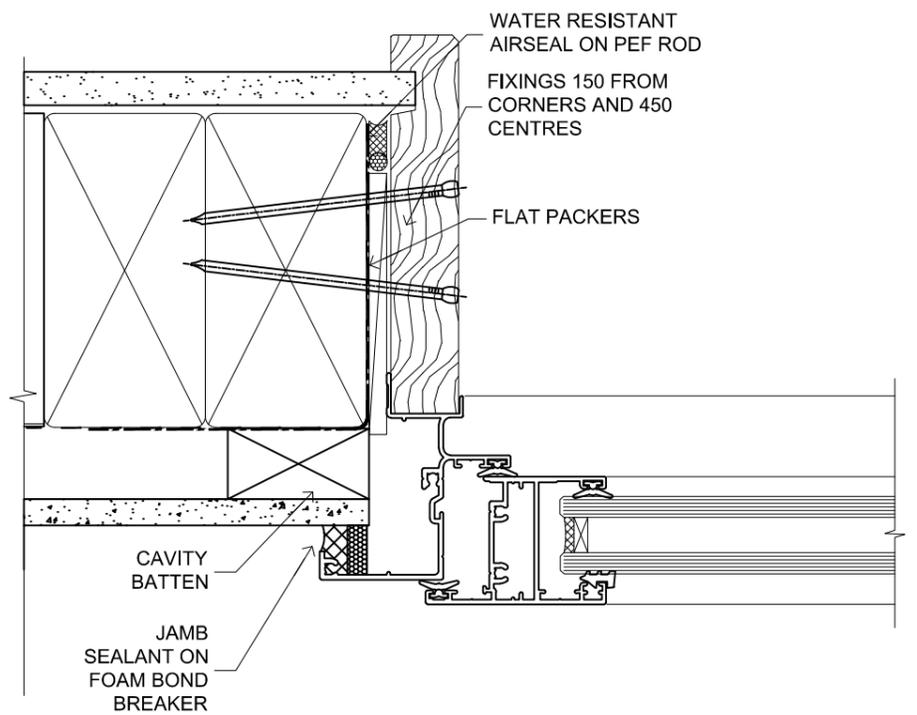

## SILL

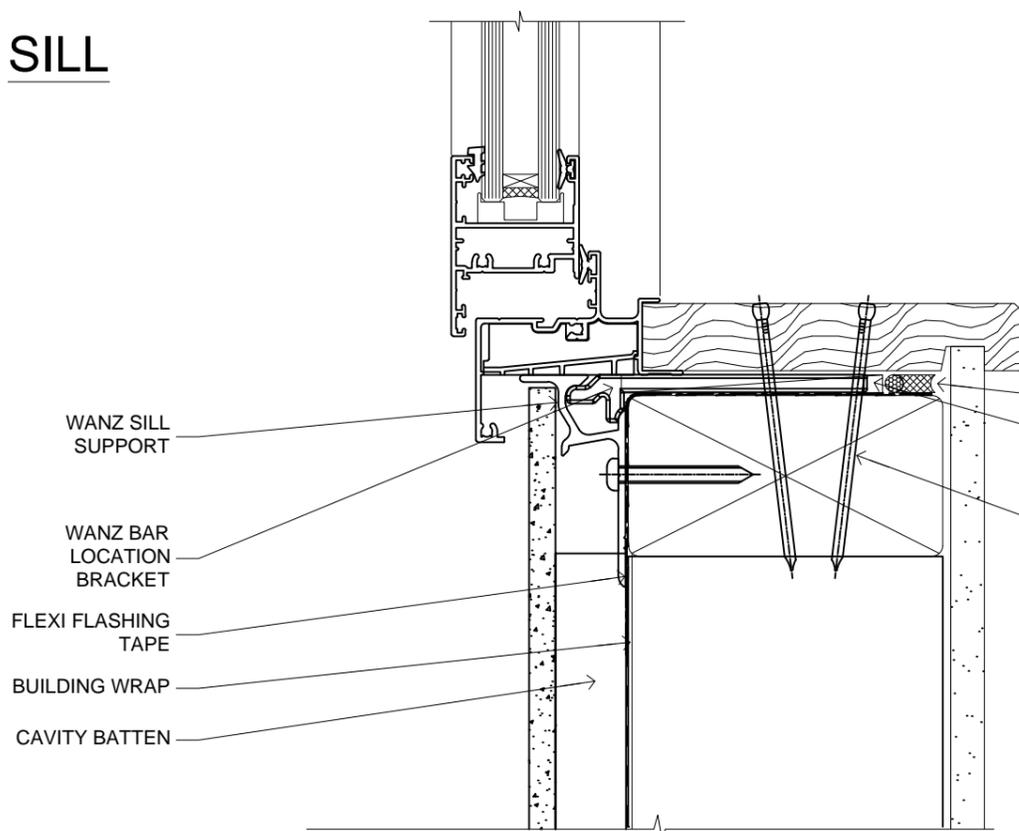

## JAMB

WATER RESISTANT AIRSEAL ON PEF ROD  
 FLAT PACKERS  
 FIXINGS: PAIRS OF 75x3.15mm NAILS OR 1 X 8g 65MM SS SCREWS AT 150 FROM CORNERS AND 450 CENTRES

## WINDOW


FAIRVIEW SYSTEMS LIMITED SPECIFIERS GUIDE 2014 © TECHNICAL SPECIFICATIONS & PROFILE DETAILS SUBJECT TO CHANGE WITHOUT NOTICE

# ARCHITECTURAL LINEAR 35, CAVITY CONSTRUCTION, FIBRE CEMENT SHEET DETAILS

DATE  
01.12.2014

SCALE  
1:1


REF. AL35 FCS CC 01

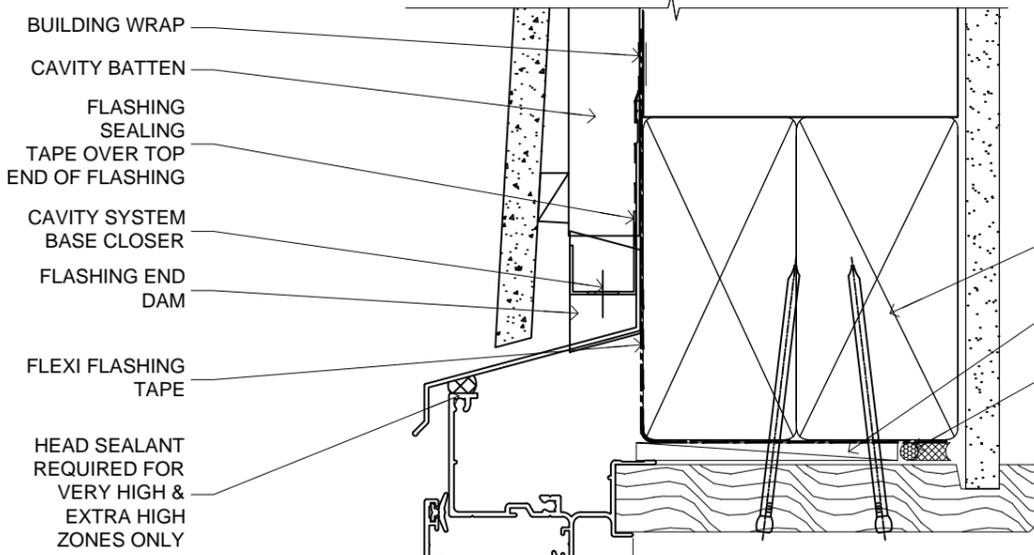

- BUILDING WRAP
- CAVITY BATTEN
- FLASHING SEALING TAPE OVER TOP END OF FLASHING
- CAVITY SYSTEM BASE CLOSER
- FLASHING END DAM
- FLEXI FLASHING TAPE
- HEAD SEALANT REQUIRED FOR VERY HIGH & EXTRA HIGH ZONES ONLY

- FIXINGS 150 FROM CORNERS AND 450 CENTRES
- TEMPORARY FLAT PACKERS REMOVED FROM HEAD AFTER FIXING
- WATER RESISTANT AIRSEAL ON PEF ROD


## HEAD

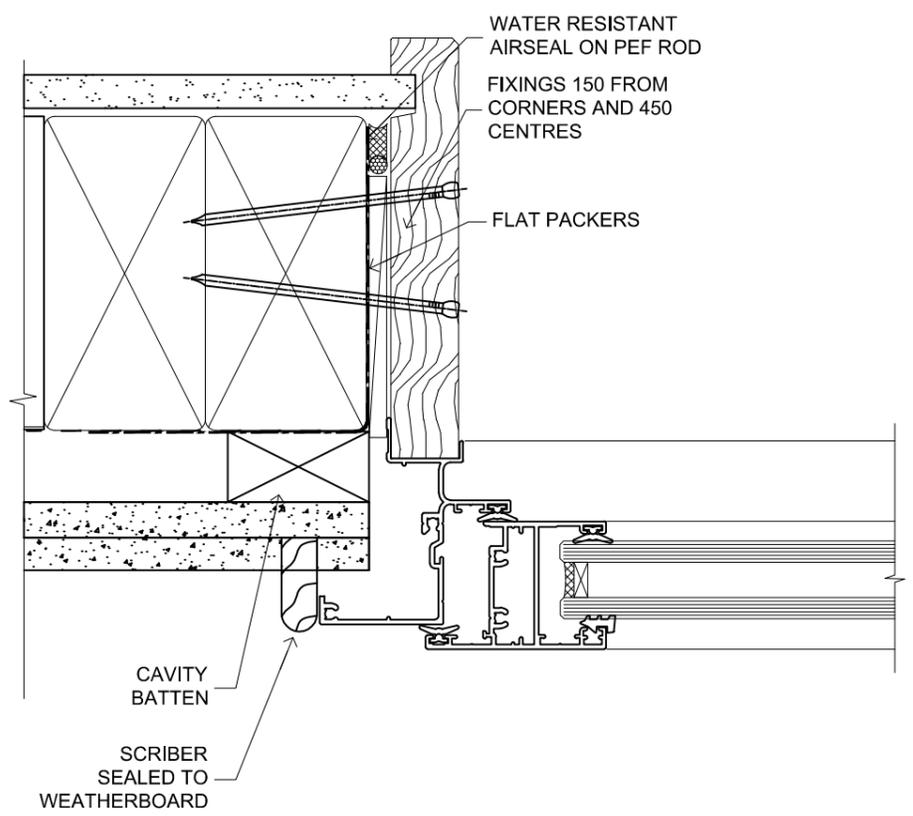

- WATER RESISTANT AIRSEAL ON PEF ROD
- FIXINGS 150 FROM CORNERS AND 450 CENTRES
- FLAT PACKERS

- CAVITY BATTEN
- SCRIBER SEALED TO WEATHERBOARD

## SILL

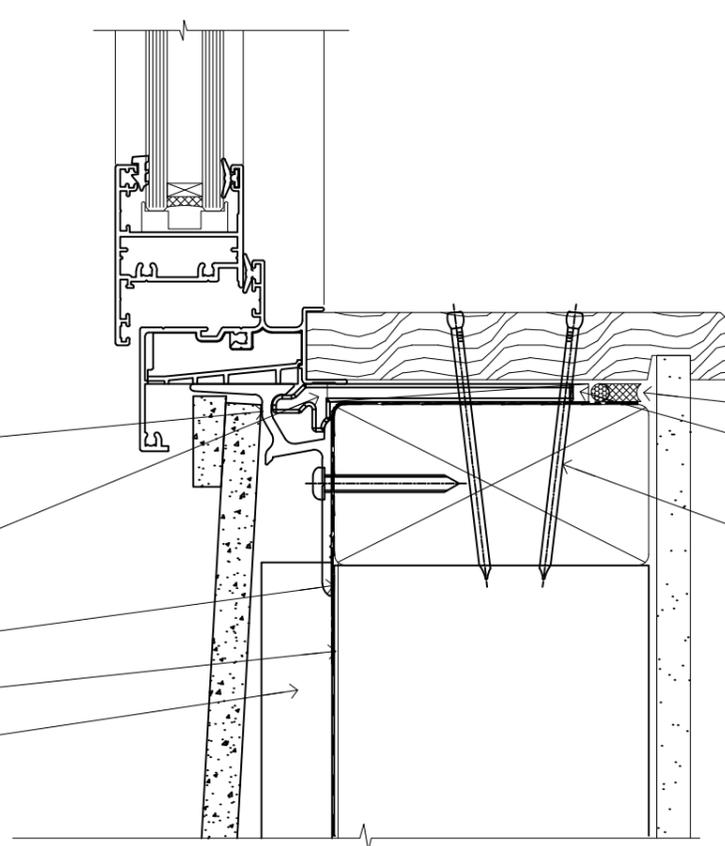

- WANZ SILL SUPPORT
- WANZ BAR LOCATION BRACKET
- FLEXI FLASHING TAPE
- BUILDING WRAP
- CAVITY BATTEN


- WATER RESISTANT AIRSEAL ON PEF ROD
- FLAT PACKERS
- FIXINGS: PAIRS OF 75x3.15mm NAILS OR 1 X 8g 65MM SS SCREWS AT 150 FROM CORNERS AND 450 CENTRES

## JAMB

## WINDOW

FAIRVIEW SYSTEMS LIMITED SPECIFIERS GUIDE 2014 © TECHNICAL SPECIFICATIONS & PROFILE DETAILS SUBJECT TO CHANGE WITHOUT NOTICE


<h3>ARCHITECTURAL LINEAR 35, CAVITY CONSTRUCTION, FIBRE CEMENT WEATHERBOARD DETAILS</h3>	DATE 01.12.2014	SCALE 1:1
	REF. AL35 FCWB CC 01	

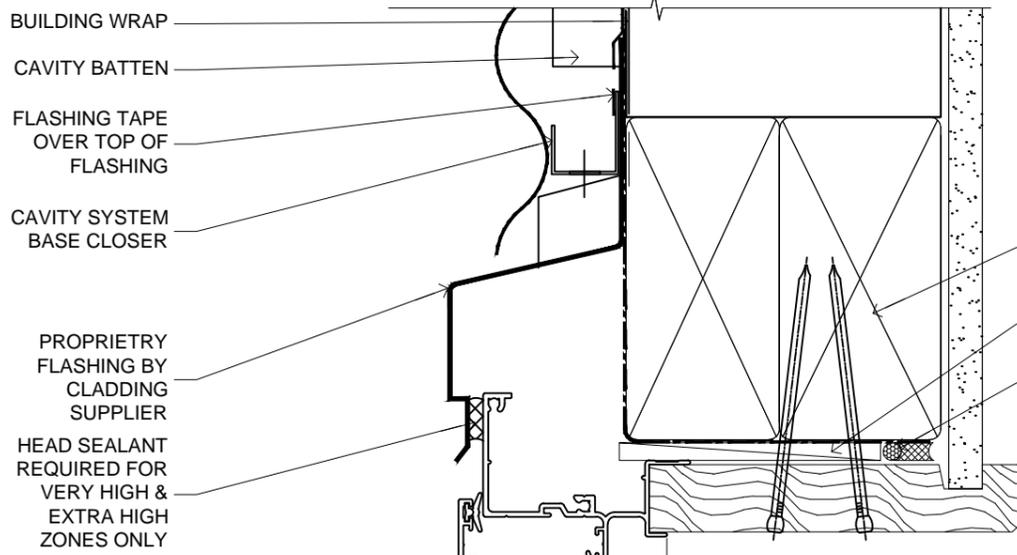

## HEAD


- BUILDING WRAP
- CAVITY BATTEN
- FLASHING TAPE OVER TOP OF FLASHING
- CAVITY SYSTEM BASE CLOSER
- PROPRIETARY FLASHING BY CLADDING SUPPLIER
- HEAD SEALANT REQUIRED FOR VERY HIGH & EXTRA HIGH ZONES ONLY

- FIXINGS 150 FROM CORNERS AND 450 CENTRES
- TEMPORARY FLAT PACKERS REMOVED FROM HEAD AFTER FIXING
- WATER RESISTANT AIRSEAL ON PEF ROD

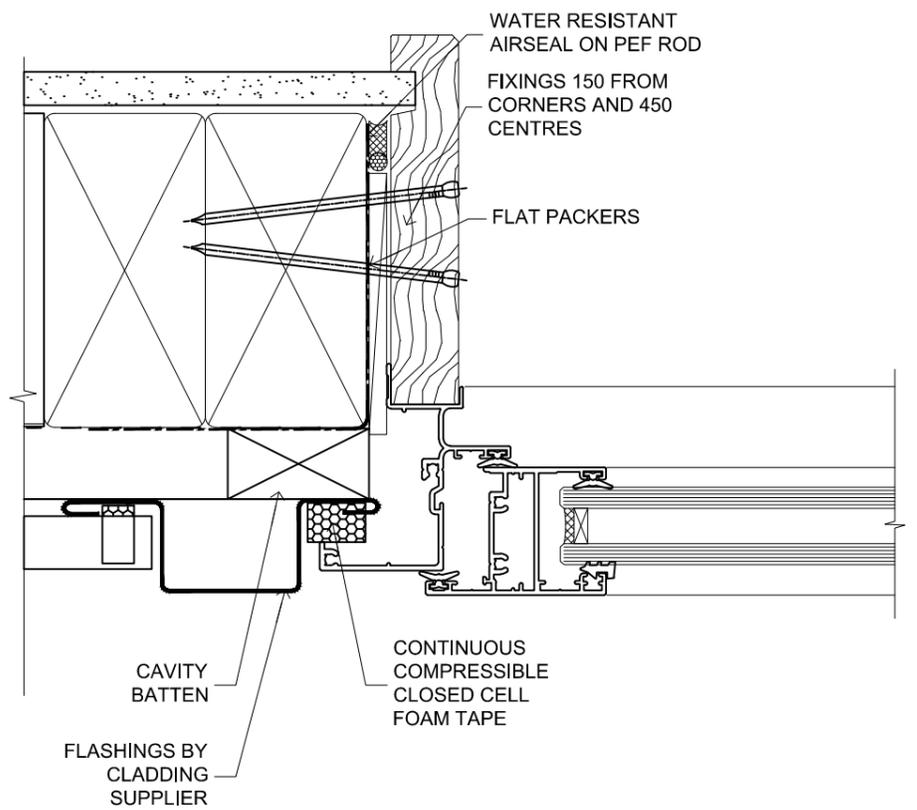

- WATER RESISTANT AIRSEAL ON PEF ROD
- FIXINGS 150 FROM CORNERS AND 450 CENTRES
- FLAT PACKERS
- CAVITY BATTEN
- CONTINUOUS COMPRESSIBLE CLOSED CELL FOAM TAPE
- FLASHINGS BY CLADDING SUPPLIER

## SILL

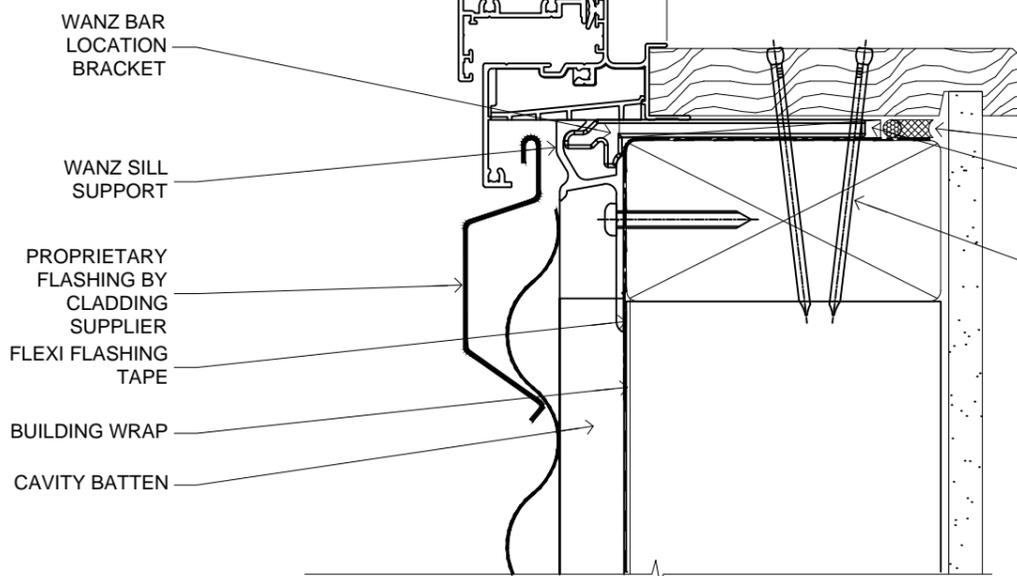

- WANZ BAR LOCATION BRACKET
- WANZ SILL SUPPORT
- PROPRIETARY FLASHING BY CLADDING SUPPLIER
- FLEXI FLASHING TAPE
- BUILDING WRAP
- CAVITY BATTEN

- WATER RESISTANT AIRSEAL ON PEF ROD
- FLAT PACKERS
- FIXINGS: PAIRS OF 75x3.15mm NAILS OR 1 X 8g 65MM SS SCREWS AT 150 FROM CORNERS AND 450 CENTRES


## JAMB

## WINDOW

FAIRVIEW SYSTEMS LIMITED SPECIFIERS GUIDE 2014 © TECHNICAL SPECIFICATIONS & PROFILE DETAILS SUBJECT TO CHANGE WITHOUT NOTICE

ARCHITECTURAL LINEAR 35, CAVITY CONSTRUCTION,  
HORIZONTAL PROFILE METAL DETAILS


DATE 01.12.2014	SCALE 1:1
REF. AL35 HPM CC 01	

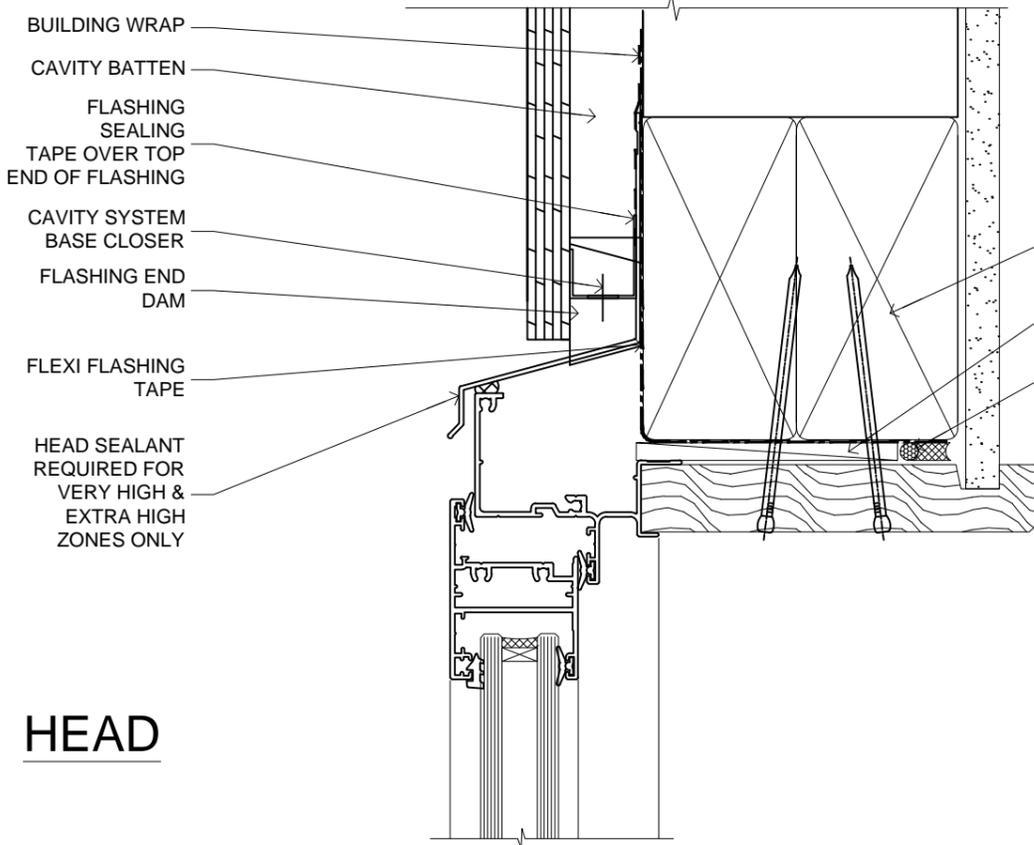

## HEAD

- BUILDING WRAP
- CAVITY BATTEN
- FLASHING SEALING TAPE OVER TOP END OF FLASHING
- CAVITY SYSTEM BASE CLOSER
- FLASHING END DAM
- FLEXI FLASHING TAPE
- HEAD SEALANT REQUIRED FOR VERY HIGH & EXTRA HIGH ZONES ONLY


- FIXINGS 150 FROM CORNERS AND 450 CENTRES
- TEMPORARY FLAT PACKERS REMOVED FROM HEAD AFTER FIXING
- WATER RESISTANT AIRSEAL ON PEF ROD

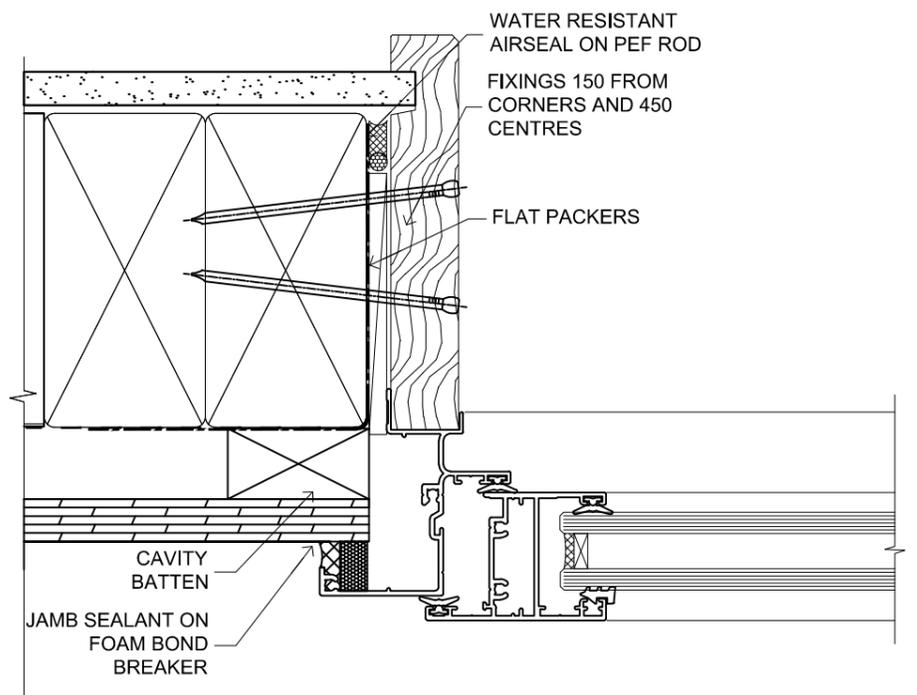

- WATER RESISTANT AIRSEAL ON PEF ROD
- FIXINGS 150 FROM CORNERS AND 450 CENTRES
- FLAT PACKERS

- CAVITY BATTEN
- JAMB SEALANT ON FOAM BOND BREAKER

## SILL

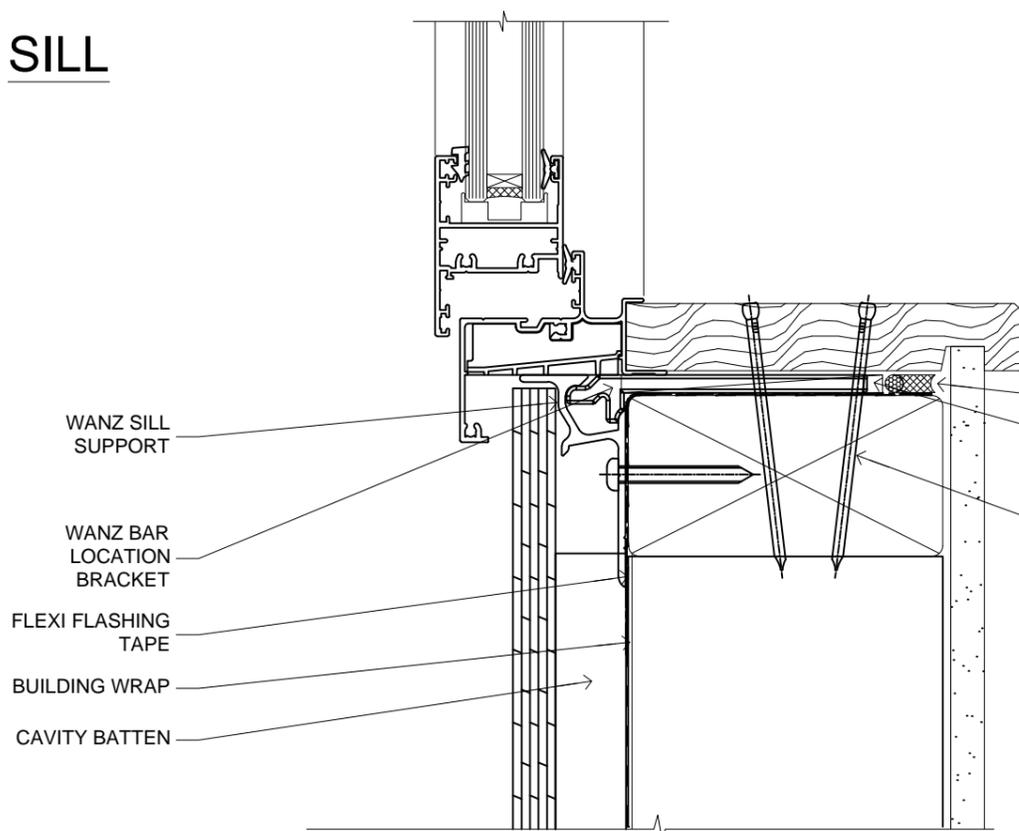

- WANZ SILL SUPPORT
- WANZ BAR LOCATION BRACKET
- FLEXI FLASHING TAPE
- BUILDING WRAP
- CAVITY BATTEN

- WATER RESISTANT AIRSEAL ON PEF ROD
- FLAT PACKERS
- FIXINGS: PAIRS OF 75x3.15mm NAILS OR 1 X 8g 65MM SS SCREWS AT 150 FROM CORNERS AND 450 CENTRES

## JAMB

## WINDOW


FAIRVIEW SYSTEMS LIMITED SPECIFIERS GUIDE 2014 © TECHNICAL SPECIFICATIONS & PROFILE DETAILS SUBJECT TO CHANGE WITHOUT NOTICE

# ARCHITECTURAL LINEAR 35, CAVITY CONSTRUCTION, PLYWOOD SHEET DETAILS

DATE  
01.12.2014


SCALE  
1:1

REF. AL35 PS CC 01

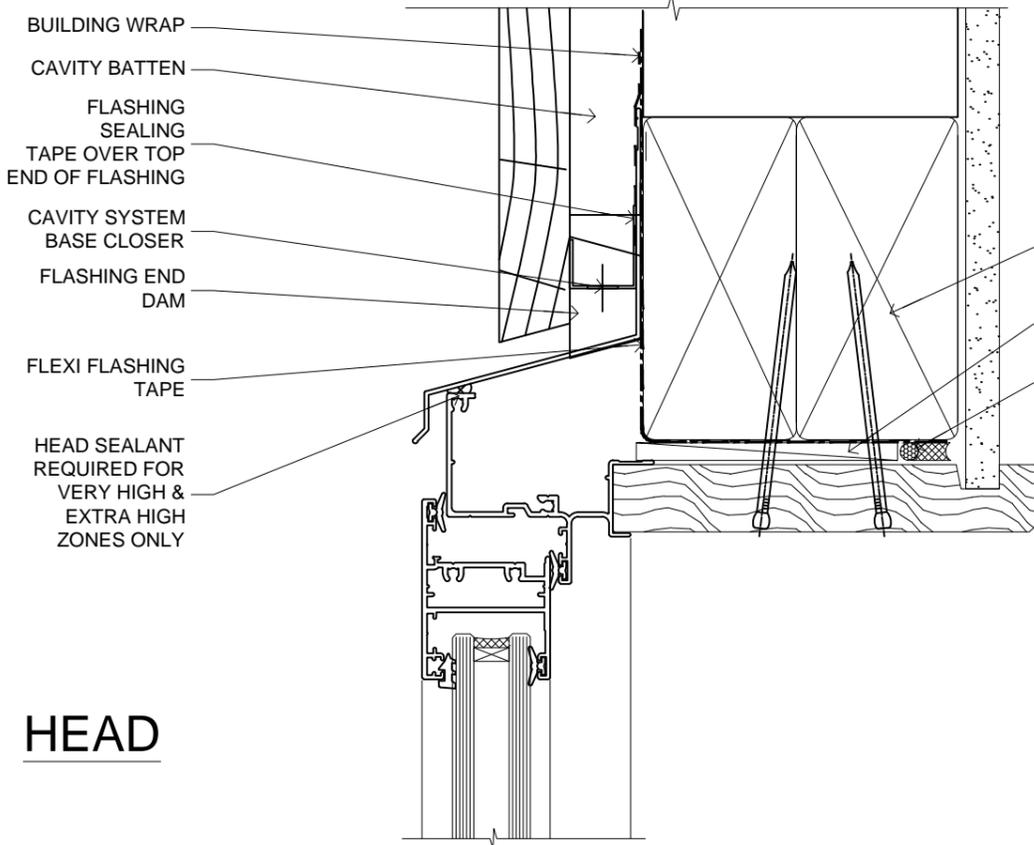


## HEAD

FIXINGS 150 FROM CORNERS AND 450 CENTRES  
 TEMPORARY FLAT PACKERS REMOVED FROM HEAD AFTER FIXING  
 WATER RESISTANT AIRSEAL ON PEF ROD

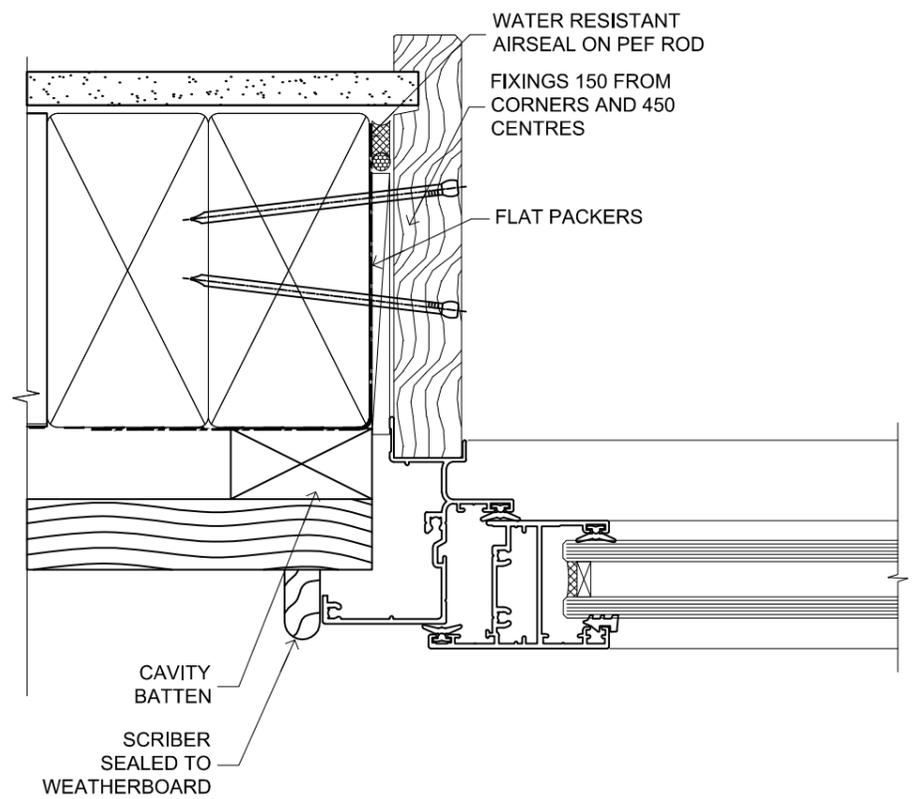

## SILL

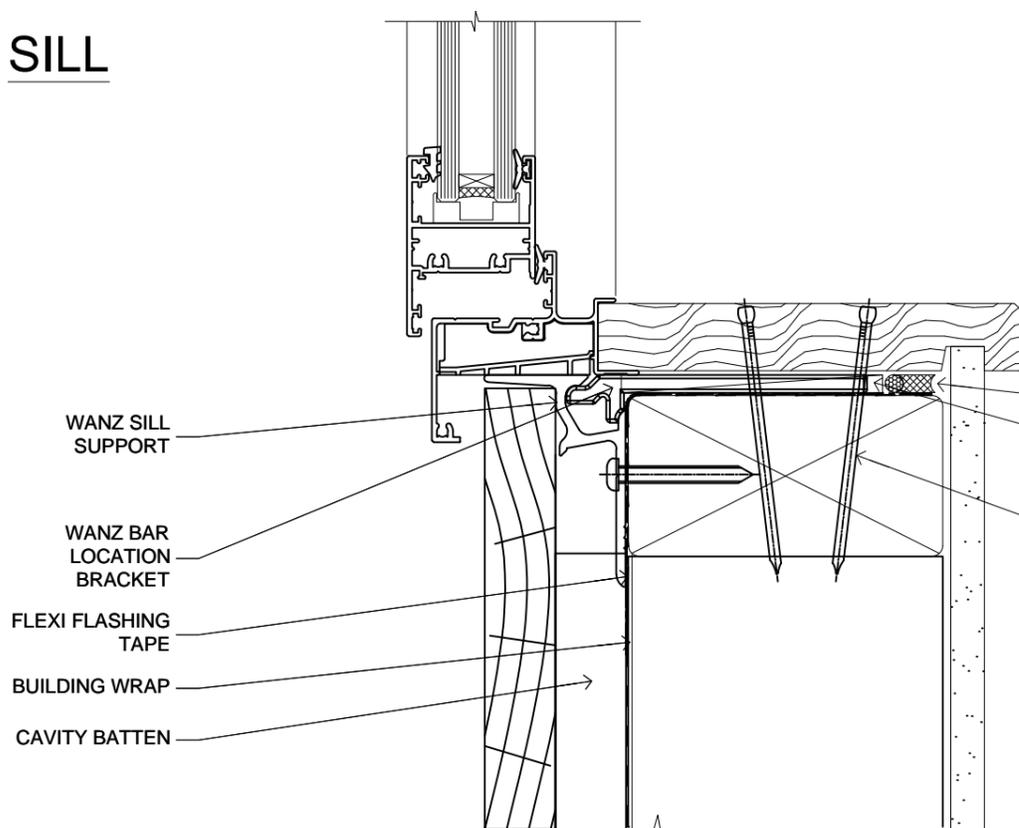

WATER RESISTANT AIRSEAL ON PEF ROD  
 FLAT PACKERS  
 FIXINGS: PAIRS OF 75x3.15mm NAILS OR 1 X 8g 65MM SS SCREWS AT 150 FROM CORNERS AND 450 CENTRES

## JAMB

## WINDOW


FAIRVIEW SYSTEMS LIMITED SPECIFIERS GUIDE 2014 © TECHNICAL SPECIFICATIONS & PROFILE DETAILS SUBJECT TO CHANGE WITHOUT NOTICE

# ARCHITECTURAL LINEAR 35, CAVITY CONSTRUCTION, RUSTICATED WEATHERBOARD DETAILS

DATE  
01.12.2014

SCALE  
1:1


REF. AL35 RWB CC 01

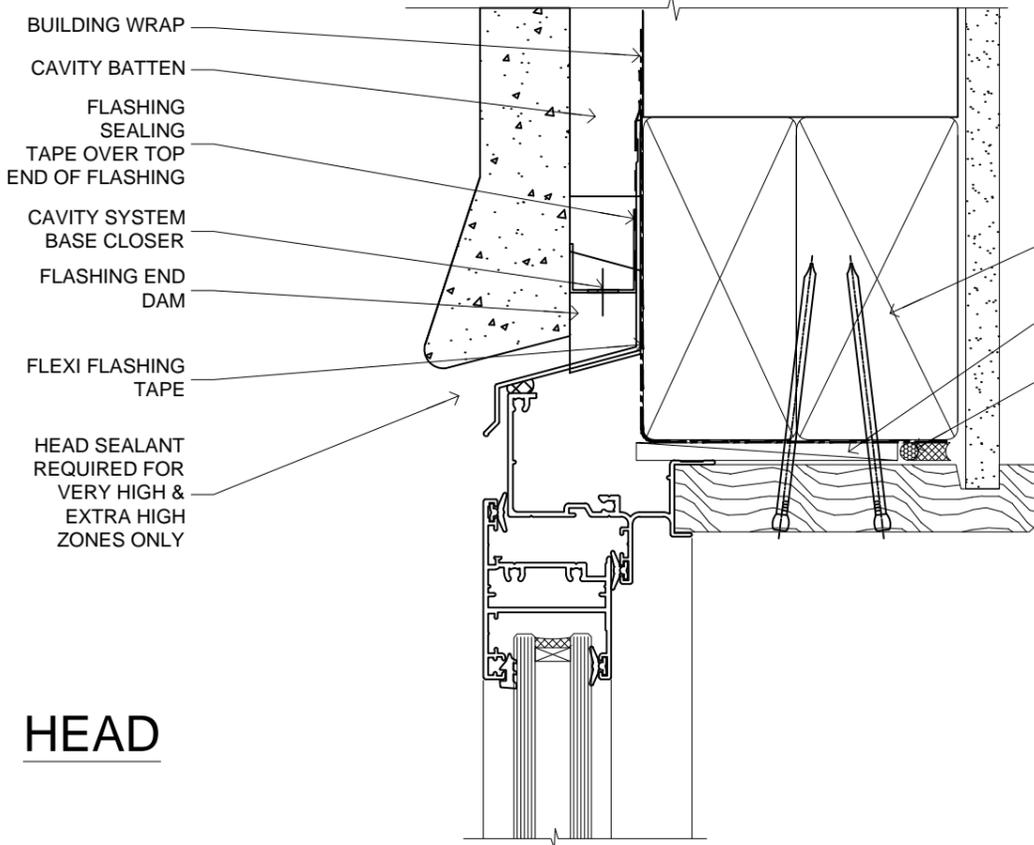

## HEAD

- BUILDING WRAP
- CAVITY BATTEN
- FLASHING SEALING TAPE OVER TOP END OF FLASHING
- CAVITY SYSTEM BASE CLOSER
- FLASHING END DAM
- FLEXI FLASHING TAPE
- HEAD SEALANT REQUIRED FOR VERY HIGH & EXTRA HIGH ZONES ONLY

- FIXINGS 150 FROM CORNERS AND 450 CENTRES
- TEMPORARY FLAT PACKERS REMOVED FROM HEAD AFTER FIXING
- WATER RESISTANT AIRSEAL ON PEF ROD

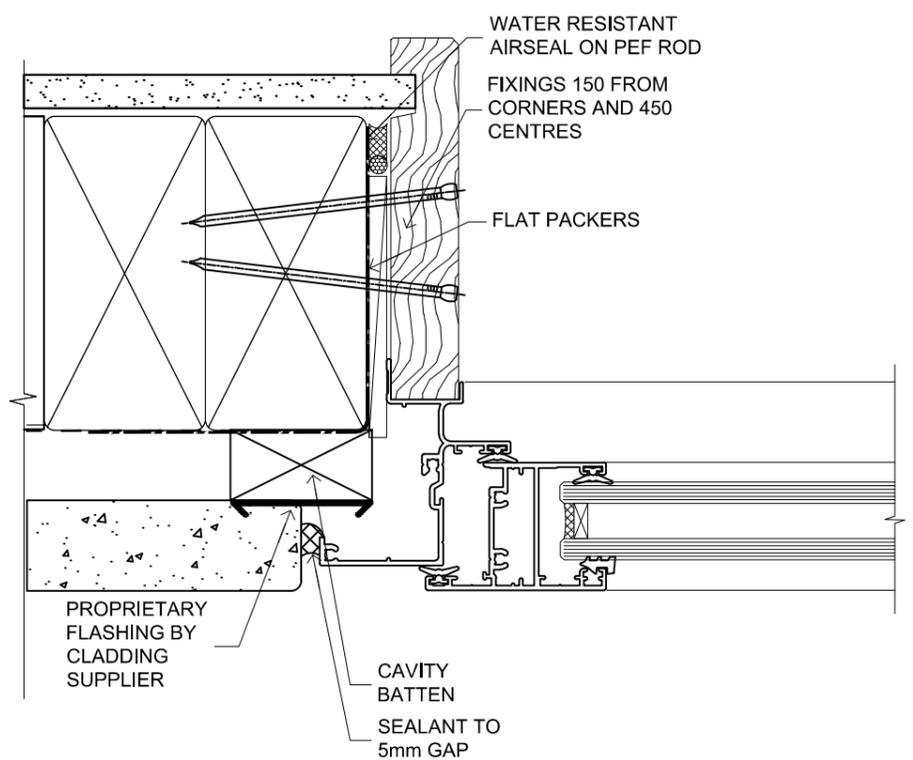


- WATER RESISTANT AIRSEAL ON PEF ROD
- FIXINGS 150 FROM CORNERS AND 450 CENTRES
- FLAT PACKERS

PROPRIETARY FLASHING BY CLADDING SUPPLIER

CAVITY BATTEN SEALANT TO 5mm GAP

## SILL

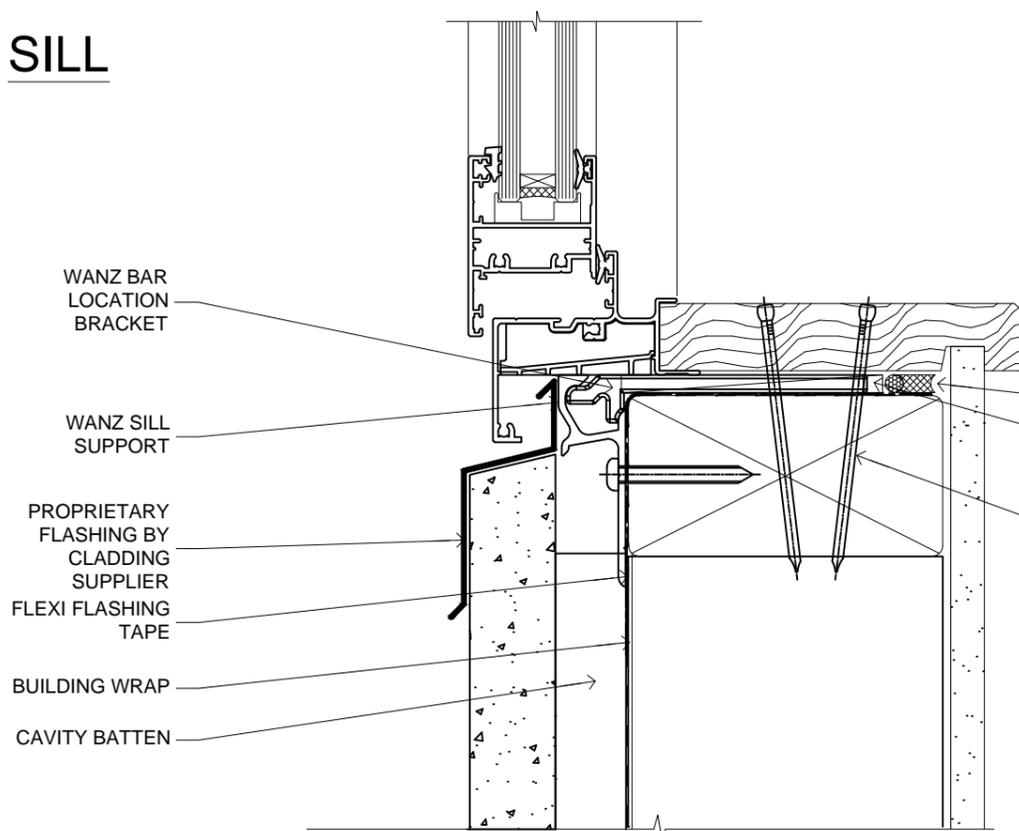

- WANZ BAR LOCATION BRACKET
- WANZ SILL SUPPORT
- PROPRIETARY FLASHING BY CLADDING SUPPLIER
- FLEXI FLASHING TAPE
- BUILDING WRAP
- CAVITY BATTEN

- WATER RESISTANT AIRSEAL ON PEF ROD
- FLAT PACKERS
- FIXINGS: PAIRS OF 75x3.15mm NAILS OR 1 X 8g 65MM SS SCREWS AT 150 FROM CORNERS AND 450 CENTRES

## JAMB

## WINDOW

FAIRVIEW SYSTEMS LIMITED SPECIFIERS GUIDE 2014 © TECHNICAL SPECIFICATIONS & PROFILE DETAILS SUBJECT TO CHANGE WITHOUT NOTICE

# ARCHITECTURAL LINEAR 35, CAVITY CONSTRUCTION, STUCCO RECESSED DETAILS

DATE  
01.12.2014

SCALE  
1:1

REF. AL35 S-R CC 01