

# LIGHT FEATURE PLANK SPECIFICATION SHEET

Moda Altro Collection Engineered T&G plank by Forté.  
15mm thick, 220mm wide, 2190mm length. Direct stick  
installation method onto substrate. Light feature grade,  
pre-finished with NatureMatte Lacquer

## PRODUCT DETAILS

Collection	Moda Altro
Product Type	Engineered Plank
Availability	Stocked
Total Thickness	15mm
Width	220mm
Length	2190mm
% of Shorts	Up to 33%
Wear Layer	4mm Solid European Oak
Core	Hevea and Pine
Backing Layer	Spruce Veneer
Construction	3-layer Engineered
Re-sands	Up to 2 (approx. 1mm removed per re-sand)
Surface Texture	Brushed
Surface Sheen	Extra Matte (4-6%)
Bevel	Micro bevel 4 sides
Status	Pre-finished (no additional coats required)
Finish	NatureMatte Lacquer (7 coats)
Species	European Oak
Wood Grade	Light Feature (refer page 2 for details)
Filler Colour	Dark


The Moda Altro Collection is also available in: Feature plank,  
herringbone pattern and stair nosing

## STRUCTURAL WARRANTY


5 Year Commercial	For terms and conditions see
25 Year Residential	<a href="http://www.forte.co.nz/warranties">www.forte.co.nz/warranties</a>

## SUSTAINABILITY

PEFC® Certified



Capri Light Feature



Sorrento Light Feature

## INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (4 sides)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

## TECHNICAL SPECIFICATIONS


Reaction to Fire (Floors)	Critical Flux 5.0kw/m <sup>2</sup>
Reaction to Fire (Walls and Ceilings)	Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating)
Wear Layer Density	700kg/m <sup>3</sup>
Formaldehyde Emission	
AS/NZS 2098.11	E0 (0.1mg/L) Low VOC, No added Formaldehyde
Slip Ratings	
AS/NZS 4586 Wet Test	Classification F, Mean COF 0.60
AS/NZS 4586 Dry Test	Classification X, Pendulum Mean 43 BPN

## PACK INFORMATION

Pack Size	2.890m <sup>2</sup>
Pack Weight	27.857kg
Pieces per pack	4 full planks + 2 split planks

# Plank Profile

## MODA ALTRO PLANK

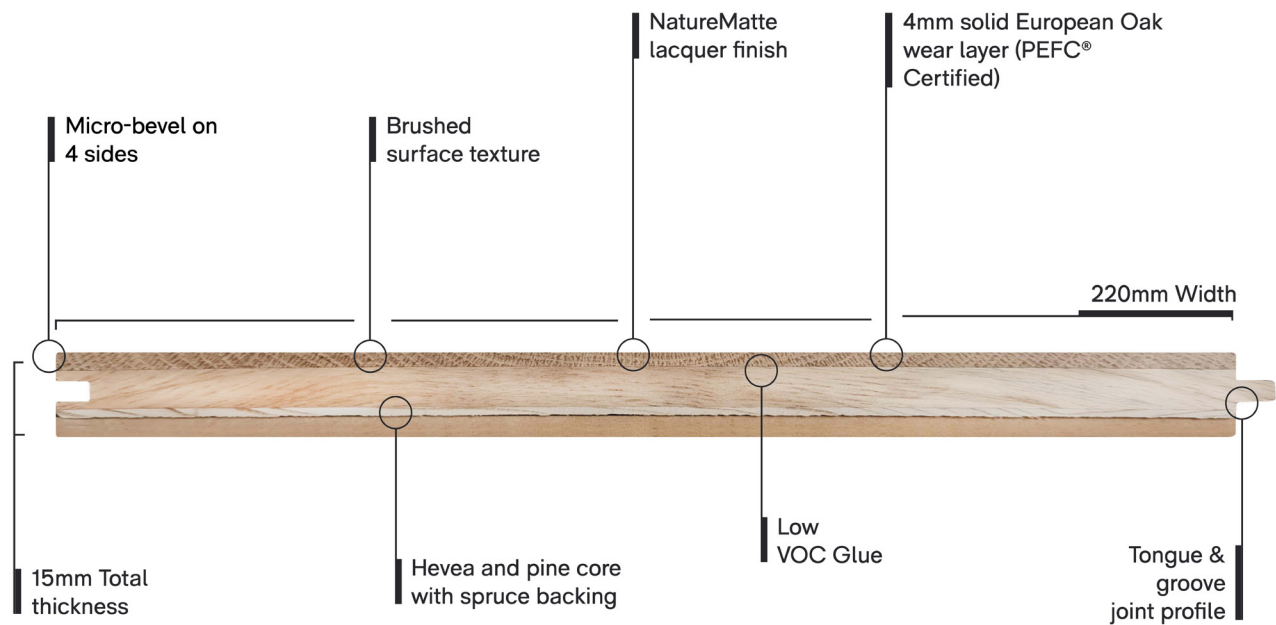

## MODA ALTRO – LIGHT FEATURE GRADE



A Moda Altro Light Feature grade plank will consist of colour variation. You may see minimal sapwood throughout the planks as well as smaller and less frequent knots. Some small cracks and checks will be present and are finished with a dark shade of filler.

# Care and Maintenance

## RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

---

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit [www.forte.co.nz/careandmaintenance](http://www.forte.co.nz/careandmaintenance)

# Structural Warranty

## MODA ALTRO 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

---

The Moda Altro Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

## MODA ALTRO 5 YEAR COMMERCIAL STRUCTURAL WARRANTY

---

The Moda Altro Collection comes with a full 5 year Commercial Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

# Installation

## THE MODA ALTRO COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

---

Please ensure that you have read and understood the installation guidelines before proceeding to install Moda Altro timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit [www.forte.co.nz/installation](http://www.forte.co.nz/installation)